

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909690

Luminaire Tested: DFN2DIP-SQ4F0-160D080US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909690
REPORT IS A COMBINATION OF REPORTS P900112 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-160D080US840-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20884.0 lumens
Efficiency: N/A
Efficacy: 92.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 226.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909690

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US840-RLLFLL

Luminous Intensity Polar Plot

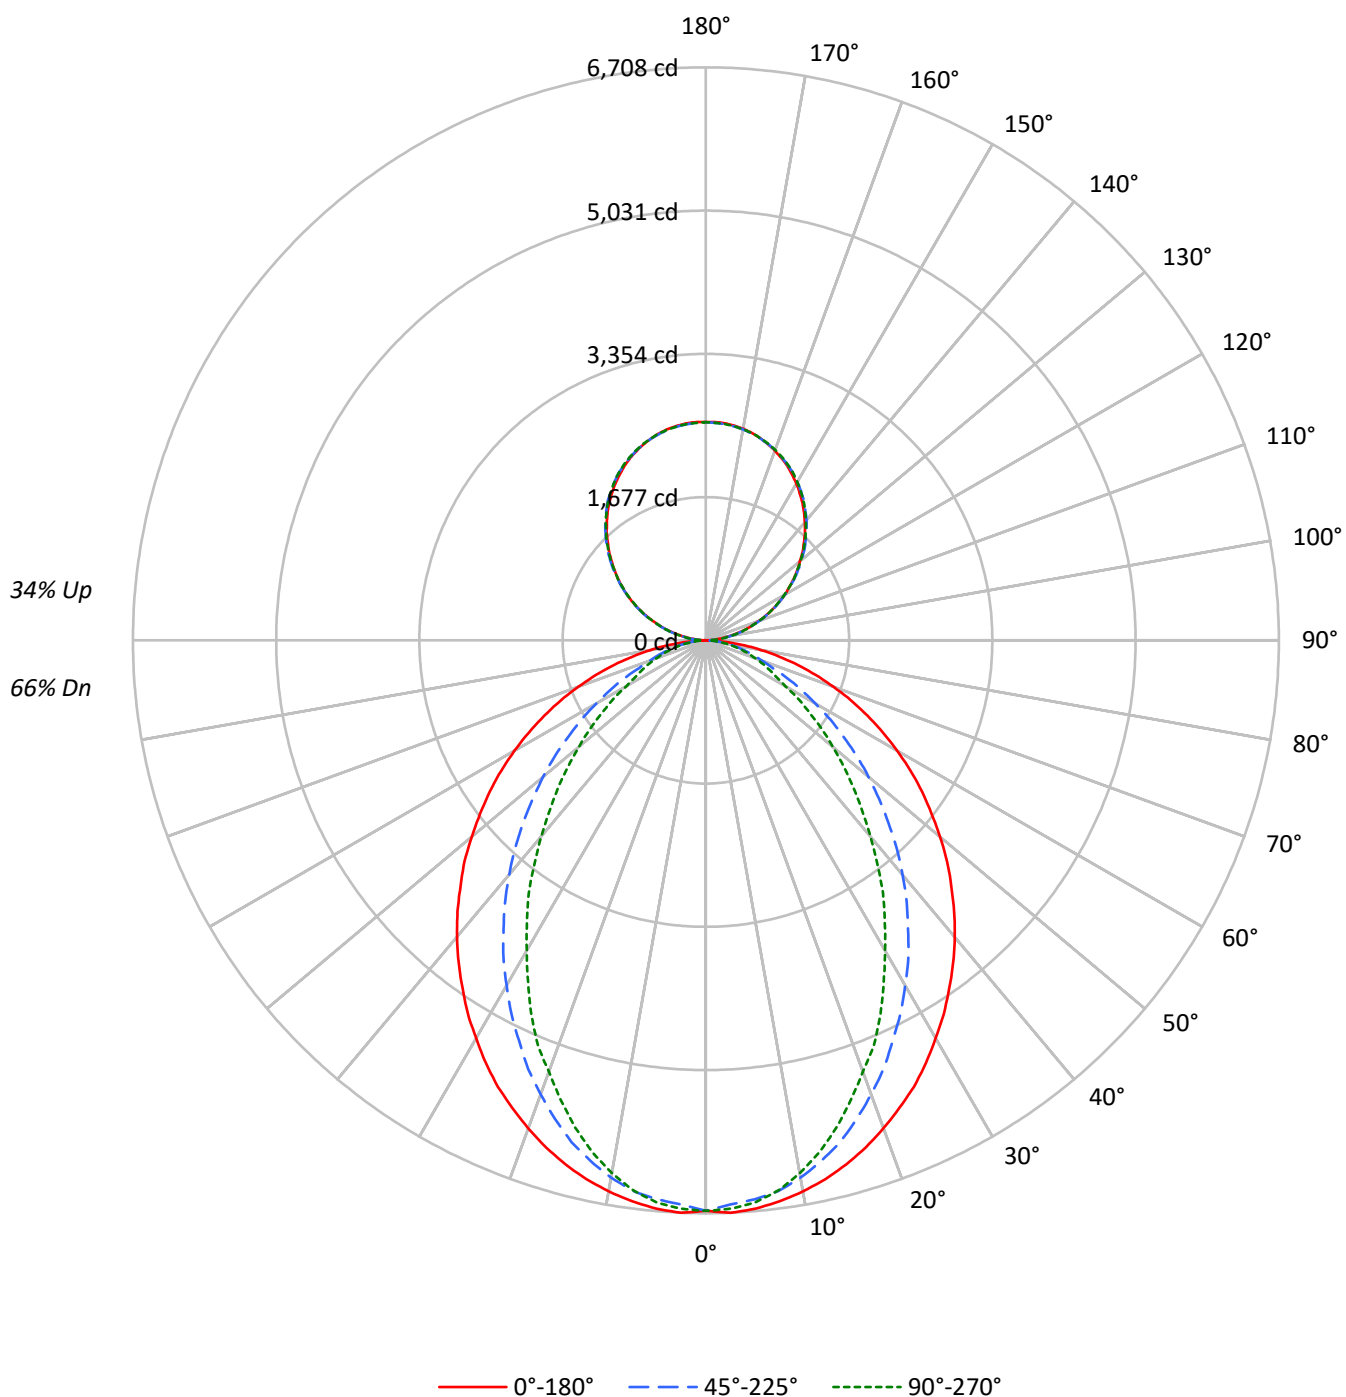

TEST NUMBER: P909690

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US840-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4686	4686	4686
5°	4693	4612	4642
10°	4647	4523	4493
15°	4583	4374	4260
20°	4498	4169	3975
25°	4411	3939	3699
30°	4295	3703	3349
35°	4181	3449	3041
40°	4065	3186	2688
45°	3930	2894	2368
50°	3790	2600	2056
55°	3645	2285	1755
60°	3476	1955	1446
65°	3282	1621	1303
70°	3047	1308	1181
75°	2752	1155	1078
80°	2324	972	939
85°	1618	654	715

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3930 cd/sqm

TEST NUMBER: P909690

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	625.9	3.0
10°-20°	1718.2	8.2
20°-30°	2412.2	11.6
30°-40°	2629.5	12.6
40°-50°	2416.8	11.6
50°-60°	1898.0	9.1
60°-70°	1235.4	5.9
70°-80°	635.9	3.0
80°-90°	169.6	0.8
90°-100°	158.1	0.8
100°-110°	502.4	2.4
110°-120°	859.7	4.1
120°-130°	1130.6	5.4
130°-140°	1269.1	6.1
140°-150°	1244.5	6.0
150°-160°	1043.9	5.0
160°-170°	692.3	3.3
170°-180°	242.0	1.2
0°-30°	4756.2	22.8
0°-40°	7385.7	35.4
0°-60°	11700.5	56.0
0°-90°	13741.4	65.8
90°-120°	1520.1	7.3
90°-150°	5164.3	24.7
90°-180°	7143.0	34.2
0°-180°	20884.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	6678	6678	6678	6678	6678	
5°	6678	6648	6569	6624	6606	633
15°	6352	6285	6080	5965	5905	1790
25°	5766	5572	5173	4926	4835	2652
35°	4968	4660	4128	3747	3614	3109
45°	4061	3656	3022	2592	2447	3136
55°	3088	2617	1964	1602	1487	2759
65°	2085	1595	1052	846	828	2067
75°	1112	689	483	441	435	1176
85°	260	133	115	115	115	298
90°	2	28	76	71	73	20
95°	112	134	138	138	134	125
105°	464	470	474	478	478	489
115°	863	875	871	869	863	853
125°	1255	1274	1268	1261	1259	1121
135°	1623	1647	1652	1649	1643	1254
145°	1970	1986	1998	2000	1992	1231
155°	2253	2259	2266	2277	2270	1037
165°	2451	2449	2449	2464	2453	691
175°	2550	2544	2540	2555	2542	242
180°	2555	2555	2555	2555	2555	

TEST NUMBER: P909690

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US840-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	6678.0	6678.0	6678.0	6678.0	6678.0
2.5°	6708.1	6678.0	6611.3	6672.3	6660.1
5°	6678.0	6647.8	6569.0	6623.5	6605.5
7.5°	6623.5	6587.6	6502.9	6526.7	6496.6
10°	6551.1	6508.8	6388.2	6369.6	6333.7
12.5°	6460.6	6406.2	6242.7	6206.7	6140.1
15°	6351.7	6285.0	6079.8	5965.0	5904.7
17.5°	6224.7	6127.9	5874.0	5741.2	5644.4
20°	6079.8	5958.6	5656.6	5505.9	5372.6
22.5°	5922.7	5783.5	5432.8	5227.7	5137.2
25°	5765.6	5571.9	5173.1	4925.6	4834.6
27.5°	5578.4	5372.6	4931.4	4647.4	4508.2
30°	5378.9	5148.8	4665.3	4357.6	4194.1
32.5°	5185.4	4907.0	4412.0	4049.2	3897.8
35°	4967.9	4659.5	4128.0	3747.1	3613.8
37.5°	4756.4	4423.6	3861.9	3444.4	3293.8
40°	4532.6	4170.3	3583.6	3154.6	2997.6
42.5°	4303.0	3916.4	3306.0	2858.4	2707.8
45°	4061.3	3656.1	3021.9	2592.3	2447.4
47.5°	3831.7	3402.8	2750.1	2320.5	2187.8
50°	3577.9	3148.9	2484.0	2066.6	1940.3
52.5°	3329.7	2876.4	2230.1	1831.3	1716.5
55°	3088.0	2616.7	1964.0	1601.6	1486.9
57.5°	2840.4	2357.0	1728.7	1390.1	1293.2
60°	2586.6	2103.1	1480.5	1172.8	1075.9
62.5°	2339.1	1855.6	1268.9	979.1	931.0
65°	2085.2	1595.3	1051.6	846.4	827.8
67.5°	1843.4	1353.5	846.4	743.2	725.2
70°	1589.5	1118.2	700.8	640.6	616.2
72.5°	1347.8	900.2	586.0	538.0	525.7
75°	1111.9	688.6	483.4	441.1	435.4
77.5°	876.5	489.2	380.8	356.5	344.4
80°	658.5	350.7	289.8	266.1	266.1
82.5°	459.1	236.0	199.4	187.2	187.2
85°	259.6	132.7	114.8	114.8	114.8
87.5°	96.8	48.1	48.1	42.3	42.3
90°	2.3	27.8	75.5	70.9	73.2
92.5°	47.8	64.7	67.1	69.3	69.3
95°	112.5	134.0	137.8	137.8	134.0
97.5°	187.2	207.2	215.7	215.7	215.7
100°	273.5	291.1	297.3	297.3	295.0
102.5°	364.4	377.5	385.9	388.2	385.9
105°	463.7	469.9	474.5	478.4	478.4
107.5°	562.3	571.6	571.6	573.1	562.3
110°	657.8	670.1	670.1	670.1	664.0

TEST NUMBER: P909690

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	761.0	774.2	771.8	765.7	761.0
115°	862.7	875.0	871.2	868.9	862.7
117.5°	963.6	980.6	969.8	963.6	957.5
120°	1065.3	1082.3	1065.3	1065.3	1058.3
122.5°	1157.7	1179.3	1168.5	1162.4	1157.7
125°	1254.8	1274.0	1267.9	1260.9	1258.7
127.5°	1349.6	1373.4	1364.9	1355.7	1349.6
130°	1438.1	1465.8	1462.0	1457.4	1449.0
132.5°	1537.5	1559.0	1560.6	1549.8	1543.7
135°	1623.0	1646.9	1651.5	1649.2	1643.1
137.5°	1718.5	1737.8	1741.6	1740.1	1730.8
140°	1802.5	1821.7	1832.5	1832.5	1824.0
142.5°	1888.8	1908.0	1914.2	1916.5	1908.0
145°	1970.4	1985.8	1998.1	2000.4	1992.0
147.5°	2043.6	2062.9	2072.0	2076.0	2067.5
150°	2119.1	2132.1	2140.6	2147.6	2140.6
152.5°	2186.1	2199.2	2210.0	2218.5	2210.0
155°	2253.1	2259.3	2266.2	2276.9	2270.1
157.5°	2310.9	2315.5	2319.4	2334.7	2324.0
160°	2362.5	2367.1	2369.4	2382.5	2373.3
162.5°	2410.2	2410.2	2412.6	2427.2	2416.4
165°	2451.0	2448.7	2448.7	2464.2	2453.4
167.5°	2488.0	2481.1	2481.1	2496.5	2485.7
170°	2515.8	2509.6	2507.3	2522.7	2509.6
172.5°	2535.1	2528.9	2526.6	2541.9	2528.9
175°	2550.4	2544.3	2539.6	2555.1	2541.9
177.5°	2558.9	2552.7	2548.1	2561.2	2548.1
180°	2555.1	2555.1	2555.1	2555.1	2555.1

TEST NUMBER: P909690

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.89	14.86	14.70	15.70	16.73	9.85	10.83	10.66	11.66	12.69
	3H	15.58	16.45	16.41	17.30	18.35	11.05	11.92	11.88	12.77	13.82
	4H	16.20	17.02	17.04	17.87	18.94	11.50	12.33	12.35	13.18	14.25
	6H	16.63	17.39	17.49	18.25	19.33	11.83	12.59	12.69	13.45	14.53
	8H	16.76	17.49	17.63	18.36	19.44	11.93	12.65	12.80	13.53	14.61
	12H	16.83	17.52	17.70	18.39	19.50	11.98	12.67	12.85	13.54	14.64
4H	2H	13.92	14.75	14.77	15.60	16.67	10.46	11.29	11.31	12.14	13.21
	3H	15.77	16.45	16.63	17.34	18.42	11.83	12.51	12.69	13.40	14.48
	4H	16.47	17.09	17.34	17.97	19.09	12.38	13.00	13.26	13.88	15.00
	6H	17.00	17.54	17.89	18.44	19.55	12.81	13.35	13.70	14.25	15.37
	8H	17.18	17.68	18.07	18.58	19.71	12.94	13.44	13.83	14.34	15.47
	12H	17.28	17.73	18.19	18.65	19.78	13.01	13.47	13.93	14.38	15.52
8H	4H	16.45	16.95	17.34	17.85	18.98	12.67	13.18	13.57	14.08	15.20
	6H	17.03	17.44	17.94	18.38	19.51	13.20	13.61	14.12	14.56	15.68
	8H	17.25	17.61	18.17	18.55	19.69	13.39	13.76	14.32	14.69	15.84
	12H	17.39	17.72	18.33	18.64	19.84	13.52	13.84	14.45	14.77	15.96
12H	4H	16.41	16.86	17.32	17.78	18.91	12.69	13.14	13.60	14.06	15.19
	6H	17.00	17.37	17.93	18.30	19.45	13.25	13.62	14.18	14.55	15.70
	8H	17.23	17.56	18.16	18.48	19.68	13.47	13.79	14.40	14.72	15.91