

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912232

Luminaire Tested: DFN2DIP-SQ4F0-090D070US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P912232  
REPORT IS A COMBINATION OF REPORTS P900083 AND P896915  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-090D070US850-FLLFLL  
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 16751.5 lumens  
Efficiency: N/A  
Efficacy: 124.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 134.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.983  
Total Harmonic Distortion (THDi): 0.073  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P912232  
CATALOG NUMBER: DFN2DIP-SQ4F0-090D070US850-FLLFLL

### Luminous Intensity Polar Plot

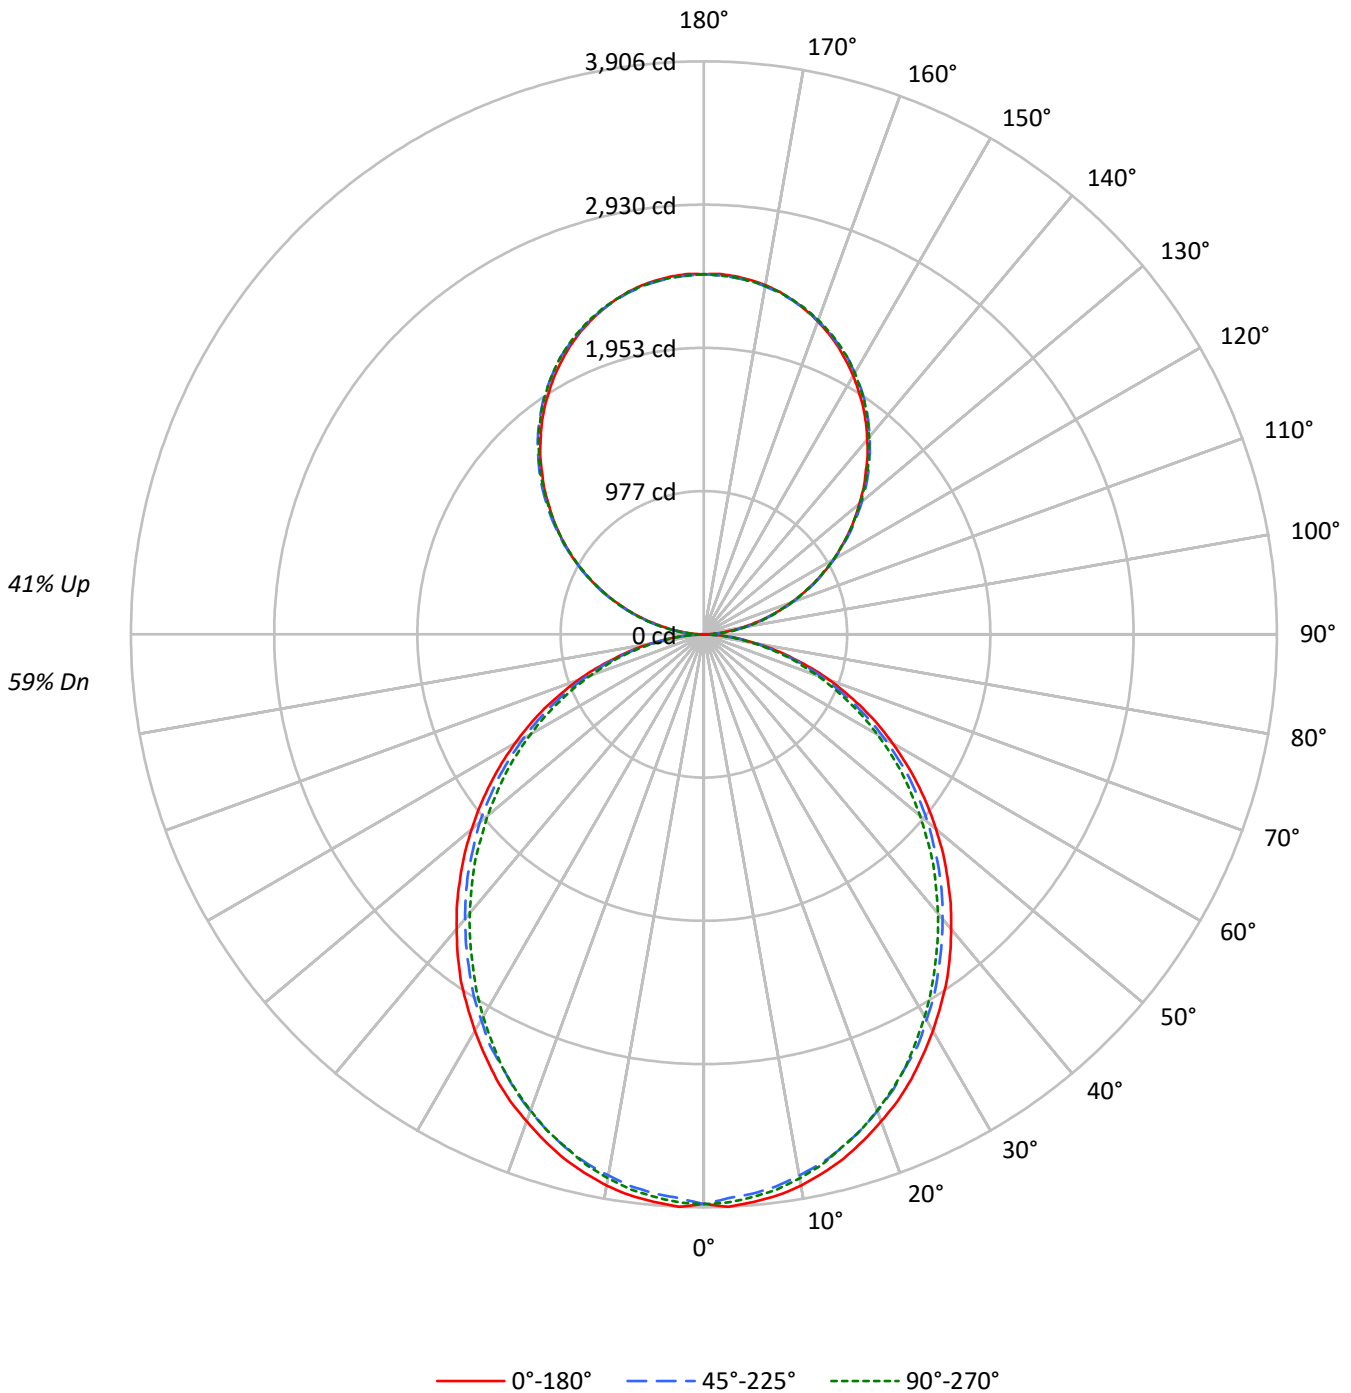



TEST NUMBER: P912232

CATALOG NUMBER: DFN2DIP-SQ4F0-090D070US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59			59
1	100	95	91	88	93	89	86	83	78	75	73	67	65	63	57	56	54	50			50
2	91	83	77	72	85	78	73	68	68	64	60	59	56	53	50	48	46	42			42
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	42	39	35			35
4	76	65	57	51	71	61	54	48	53	48	43	46	42	38	40	36	34	30			30
5	70	58	50	44	65	54	47	41	48	42	37	42	37	33	36	32	29	26			26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	33	29	26	23			23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	21			21
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21	18			18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	17			17
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15			15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2725	2725	2725
5°	2729	2688	2706
10°	2707	2652	2670
15°	2667	2609	2614
20°	2614	2549	2556
25°	2560	2477	2489
30°	2493	2410	2403
35°	2429	2331	2313
40°	2351	2251	2227
45°	2273	2171	2139
50°	2188	2087	2037
55°	2098	1990	1944
60°	1997	1874	1837
65°	1887	1755	1711
70°	1747	1610	1575
75°	1553	1436	1451
80°	1319	1214	1213
85°	953	831	815

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2273 cd/sqm



TEST NUMBER: P912232

CATALOG NUMBER: DFN2DIP-SQ4F0-090D070US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	365.5	2.2
10°-20°	1028.5	6.1
20°-30°	1511.4	9.0
30°-40°	1755.4	10.5
40°-50°	1753.3	10.5
50°-60°	1528.8	9.1
60°-70°	1130.1	6.7
70°-80°	639.4	3.8
80°-90°	175.7	1.0
90°-100°	151.9	0.9
100°-110°	482.7	2.9
110°-120°	826.1	4.9
120°-130°	1086.4	6.5
130°-140°	1219.5	7.3
140°-150°	1195.8	7.1
150°-160°	1003.1	6.0
160°-170°	665.3	4.0
170°-180°	232.5	1.4
0°-30°	2905.4	17.3
0°-40°	4660.9	27.8
0°-60°	7942.9	47.4
0°-90°	9888.2	59.0
90°-120°	1460.7	8.7
90°-150°	4962.4	29.6
90°-180°	6863.0	41.0
0°-180°	16751.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3884	3884	3884	3884	3884	
5°	3884	3869	3828	3858	3850	369
15°	3697	3675	3626	3641	3622	1041
25°	3346	3316	3253	3260	3253	1540
35°	2887	2850	2790	2767	2748	1803
45°	2349	2323	2267	2226	2211	1813
55°	1778	1755	1710	1666	1647	1589
65°	1199	1176	1139	1106	1087	1185
75°	627	620	601	579	586	670
85°	153	149	146	134	131	171
90°	2	27	72	68	70	16
95°	108	129	132	132	129	120
105°	446	452	456	460	460	470
115°	829	841	837	835	829	820
125°	1206	1224	1218	1212	1210	1077
135°	1560	1582	1587	1585	1579	1205
145°	1893	1908	1920	1922	1914	1183
155°	2165	2171	2178	2188	2181	997
165°	2355	2353	2353	2368	2357	664
175°	2451	2445	2440	2455	2443	233
180°	2455	2455	2455	2455	2455	



TEST NUMBER: P912232

CATALOG NUMBER: DFN2DIP-SQ4F0-090D070US850-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3883.6	3883.6	3883.6	3883.6	3883.6
2.5°	3906.2	3887.6	3846.5	3883.6	3876.5
5°	3883.6	3869.0	3827.8	3857.5	3850.3
7.5°	3857.5	3835.4	3794.1	3824.3	3816.7
10°	3816.7	3790.6	3745.8	3775.5	3764.4
12.5°	3760.4	3738.2	3693.5	3712.0	3704.6
15°	3697.1	3674.9	3626.1	3641.2	3622.5
17.5°	3618.6	3596.4	3547.7	3566.3	3547.7
20°	3532.6	3510.4	3458.1	3469.2	3454.5
22.5°	3447.0	3413.4	3364.6	3364.6	3357.1
25°	3346.0	3316.2	3252.9	3260.0	3252.9
27.5°	3233.8	3207.7	3159.4	3148.3	3129.7
30°	3122.2	3092.0	3036.1	3025.0	3010.0
32.5°	3002.5	2980.3	2920.4	2897.9	2882.8
35°	2886.8	2849.6	2789.7	2767.2	2748.5
37.5°	2756.1	2722.4	2662.5	2636.4	2617.8
40°	2621.7	2591.6	2531.7	2498.5	2483.5
42.5°	2490.9	2460.9	2401.4	2363.8	2341.7
45°	2349.1	2323.0	2266.7	2225.9	2210.9
47.5°	2210.9	2184.7	2124.8	2083.7	2061.5
50°	2065.1	2046.4	1994.1	1941.9	1923.2
52.5°	1923.2	1897.1	1848.7	1807.6	1781.4
55°	1777.8	1755.2	1710.4	1665.7	1647.1
57.5°	1632.0	1613.4	1564.7	1519.9	1504.8
60°	1486.2	1471.5	1419.2	1378.0	1367.0
62.5°	1344.3	1318.2	1280.9	1243.7	1228.7
65°	1198.9	1176.3	1139.1	1105.5	1086.8
67.5°	1049.6	1030.6	997.2	971.2	956.1
70°	911.3	896.2	862.6	836.4	821.8
72.5°	769.4	754.3	735.7	709.6	698.6
75°	627.3	620.0	601.1	578.9	586.4
77.5°	500.4	485.4	477.9	466.8	455.7
80°	373.6	369.6	362.1	351.0	343.6
82.5°	254.0	254.0	250.4	235.3	235.3
85°	152.9	149.4	145.8	134.3	130.8
87.5°	67.3	59.8	52.3	41.3	37.3
90°	2.2	26.6	72.5	68.1	70.3
92.5°	45.9	62.2	64.4	66.7	66.7
95°	108.0	128.8	132.5	132.5	128.8
97.5°	179.9	199.1	207.3	207.3	207.3
100°	262.7	279.8	285.7	285.7	283.5
102.5°	350.1	362.6	370.8	373.1	370.8
105°	445.6	451.5	455.9	459.7	459.7
107.5°	540.3	549.2	549.2	550.7	540.3
110°	632.1	644.0	644.0	644.0	638.0



TEST NUMBER: P912232

CATALOG NUMBER: DFN2DIP-SQ4F0-090D070US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	731.3	743.9	741.7	735.7	731.3
115°	829.0	840.8	837.2	835.0	829.0
117.5°	925.9	942.2	931.9	925.9	920.0
120°	1023.6	1039.9	1023.6	1023.6	1017.0
122.5°	1112.4	1133.2	1122.9	1116.9	1112.4
125°	1205.7	1224.2	1218.3	1211.7	1209.5
127.5°	1296.8	1319.7	1311.6	1302.7	1296.8
130°	1381.9	1408.5	1404.9	1400.4	1392.2
132.5°	1477.4	1498.1	1499.6	1489.3	1483.3
135°	1559.6	1582.4	1587.0	1584.7	1578.8
137.5°	1651.3	1669.8	1673.5	1672.0	1663.2
140°	1732.0	1750.6	1760.9	1760.9	1752.8
142.5°	1814.9	1833.4	1839.3	1841.5	1833.4
145°	1893.4	1908.1	1920.0	1922.2	1914.1
147.5°	1963.7	1982.2	1991.1	1994.8	1986.7
150°	2036.2	2048.8	2057.0	2063.6	2057.0
152.5°	2100.6	2113.2	2123.5	2131.7	2123.5
155°	2165.0	2170.9	2177.6	2187.9	2181.3
157.5°	2220.6	2225.0	2228.6	2243.5	2233.1
160°	2270.1	2274.6	2276.8	2289.3	2280.4
162.5°	2316.0	2316.0	2318.3	2332.2	2321.9
165°	2355.2	2353.0	2353.0	2367.8	2357.4
167.5°	2390.8	2384.1	2384.1	2398.9	2388.6
170°	2417.4	2411.5	2409.3	2424.1	2411.5
172.5°	2435.9	2429.9	2427.7	2442.6	2429.9
175°	2450.7	2444.8	2440.4	2455.1	2442.6
177.5°	2458.9	2452.9	2448.5	2461.1	2448.5
180°	2455.1	2455.1	2455.1	2455.1	2455.1



TEST NUMBER: P912232  
 CATALOG NUMBER: DFN2DIP-SQ4F0-090D070US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.56	12.51	12.44	13.41	14.54	11.12	12.06	11.99	12.96	14.10
	3H	13.23	14.08	14.12	14.99	16.15	12.74	13.59	13.63	14.50	15.66
	4H	13.83	14.63	14.73	15.54	16.71	13.33	14.14	14.24	15.05	16.22
	6H	14.23	14.98	15.15	15.89	17.08	13.73	14.48	14.65	15.39	16.58
	8H	14.34	15.05	15.27	15.99	17.17	13.84	14.55	14.76	15.48	16.67
	12H	14.40	15.07	15.32	16.00	17.21	13.89	14.56	14.81	15.49	16.70
4H	2H	12.03	12.84	12.94	13.75	14.92	11.68	12.48	12.59	13.39	14.57
	3H	13.91	14.58	14.83	15.53	16.71	13.50	14.18	14.42	15.12	16.30
	4H	14.63	15.25	15.56	16.18	17.40	14.21	14.82	15.14	15.76	16.97
	6H	15.16	15.69	16.10	16.65	17.86	14.72	15.25	15.67	16.22	17.43
	8H	15.31	15.81	16.26	16.76	17.99	14.87	15.37	15.82	16.32	17.55
	12H	15.39	15.84	16.36	16.81	18.04	14.94	15.39	15.91	16.36	17.59
8H	4H	14.84	15.33	15.78	16.29	17.51	14.46	14.95	15.41	15.91	17.14
	6H	15.48	15.89	16.45	16.88	18.11	15.09	15.50	16.06	16.50	17.72
	8H	15.70	16.06	16.68	17.05	18.29	15.31	15.67	16.29	16.66	17.90
	12H	15.84	16.16	16.82	17.14	18.43	15.43	15.75	16.41	16.73	18.02
12H	4H	14.83	15.27	15.79	16.25	17.48	14.46	14.90	15.42	15.88	17.11
	6H	15.51	15.87	16.49	16.86	18.10	15.14	15.50	16.12	16.48	17.73
	8H	15.76	16.08	16.74	17.06	18.35	15.38	15.70	16.36	16.68	17.97