

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912272

Luminaire Tested: DFN2DIP-SQ4F0-100D080US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912272
REPORT IS A COMBINATION OF REPORTS P900103 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-100D080US850-FLLFLL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18830.8 lumens
Efficiency: N/A
Efficacy: 123.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 152.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912272

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US850-FLLFLL

Luminous Intensity Polar Plot

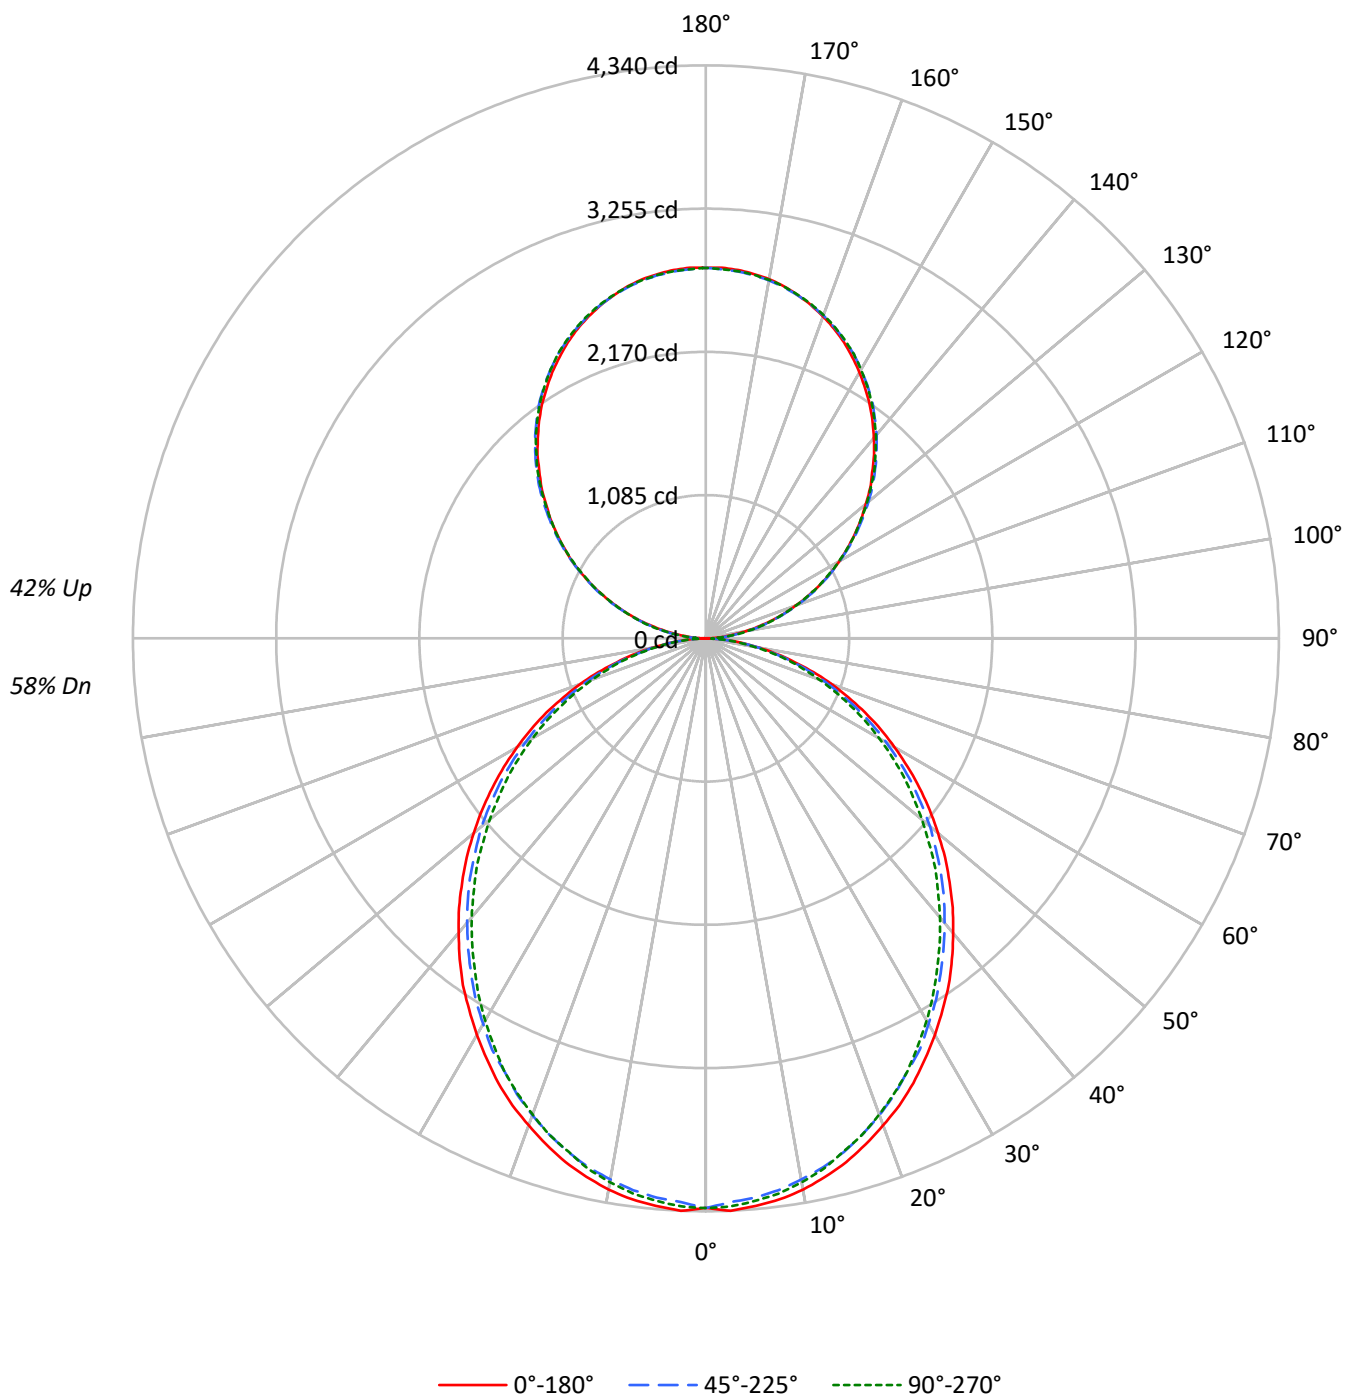

TEST NUMBER: P912272

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US850-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64
1	100	95	91	88	93	89	86	82	77	75	72	66	65	63	56	55	54
2	91	83	77	72	84	78	72	68	68	64	60	58	55	52	50	47	45
3	83	73	66	60	77	69	62	57	60	55	50	52	48	44	44	41	39
4	76	65	57	51	70	61	54	48	53	47	43	46	42	38	39	36	33
5	70	58	50	43	65	54	47	41	48	42	37	41	37	33	35	32	29
6	64	52	44	38	60	49	41	36	43	37	32	37	33	29	32	29	26
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23
8	55	43	35	29	51	40	33	28	36	30	26	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3028	3028	3028
5°	3033	2986	3007
10°	3008	2947	2967
15°	2964	2899	2904
20°	2904	2832	2840
25°	2845	2752	2765
30°	2770	2677	2670
35°	2699	2590	2570
40°	2612	2501	2475
45°	2526	2412	2377
50°	2431	2319	2264
55°	2332	2211	2160
60°	2219	2083	2041
65°	2097	1950	1901
70°	1941	1789	1750
75°	1725	1595	1613
80°	1465	1349	1347
85°	1059	923	906

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2526 cd/sqm

TEST NUMBER: P912272

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.1	2.2
10°-20°	1142.7	6.1
20°-30°	1679.4	8.9
30°-40°	1950.5	10.4
40°-50°	1948.1	10.3
50°-60°	1698.7	9.0
60°-70°	1255.7	6.7
70°-80°	710.4	3.8
80°-90°	195.5	1.0
90°-100°	173.6	0.9
100°-110°	551.7	2.9
110°-120°	944.1	5.0
120°-130°	1241.6	6.6
130°-140°	1393.7	7.4
140°-150°	1366.6	7.3
150°-160°	1146.4	6.1
160°-170°	760.3	4.0
170°-180°	265.7	1.4
0°-30°	3228.3	17.1
0°-40°	5178.7	27.5
0°-60°	8825.5	46.9
0°-90°	10987.1	58.3
90°-120°	1669.4	8.9
90°-150°	5671.3	30.1
90°-180°	7844.0	41.7
0°-180°	18830.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4315	4315	4315	4315	4315	
5°	4315	4299	4253	4286	4278	410
15°	4108	4083	4029	4046	4025	1157
25°	3718	3685	3614	3622	3614	1711
35°	3208	3166	3100	3075	3054	2003
45°	2610	2581	2518	2473	2456	2014
55°	1975	1950	1900	1851	1830	1766
65°	1332	1307	1266	1228	1208	1317
75°	697	689	668	643	652	744
85°	170	166	162	149	145	190
90°	3	30	83	78	80	18
95°	124	147	151	151	147	137
105°	509	516	521	525	525	537
115°	947	961	957	954	947	937
125°	1378	1399	1392	1385	1382	1231
135°	1782	1809	1814	1811	1804	1378
145°	2164	2181	2194	2197	2188	1352
155°	2474	2481	2489	2500	2493	1139
165°	2692	2689	2689	2706	2694	759
175°	2801	2794	2789	2806	2792	266
180°	2806	2806	2806	2806	2806	

TEST NUMBER: P912272

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4315.2	4315.2	4315.2	4315.2	4315.2
2.5°	4340.3	4319.6	4273.8	4315.2	4307.2
5°	4315.2	4298.9	4253.1	4286.2	4278.2
7.5°	4286.2	4261.4	4215.6	4249.1	4240.8
10°	4240.8	4211.8	4162.0	4195.0	4182.7
12.5°	4178.3	4153.6	4103.9	4124.6	4116.2
15°	4107.8	4083.2	4029.0	4045.7	4025.1
17.5°	4020.7	3996.1	3941.8	3962.6	3941.8
20°	3925.1	3900.5	3842.4	3854.7	3838.4
22.5°	3830.0	3792.7	3738.4	3738.4	3730.1
25°	3717.8	3684.8	3614.3	3622.2	3614.3
27.5°	3593.2	3564.1	3510.4	3498.1	3477.4
30°	3469.1	3435.6	3373.5	3361.2	3344.4
32.5°	3336.1	3311.5	3244.9	3219.9	3203.1
35°	3207.6	3166.2	3099.7	3074.6	3053.9
37.5°	3062.3	3024.8	2958.4	2929.3	2908.6
40°	2913.0	2879.5	2813.1	2776.2	2759.4
42.5°	2767.7	2734.2	2668.3	2626.4	2601.8
45°	2610.1	2581.1	2518.5	2473.2	2456.5
47.5°	2456.5	2427.5	2361.0	2315.1	2290.5
50°	2294.5	2273.8	2215.7	2157.6	2136.9
52.5°	2136.9	2107.9	2054.1	2008.4	1979.3
55°	1975.4	1950.3	1900.5	1850.7	1830.1
57.5°	1813.3	1792.6	1738.5	1688.8	1672.0
60°	1651.3	1635.0	1576.9	1531.1	1518.8
62.5°	1493.7	1464.7	1423.3	1381.9	1365.2
65°	1332.1	1307.1	1265.7	1228.2	1207.6
67.5°	1166.2	1145.0	1108.1	1079.1	1062.3
70°	1012.5	995.8	958.4	929.3	913.0
72.5°	854.9	838.2	817.6	788.5	776.1
75°	696.9	689.0	667.8	643.2	651.5
77.5°	556.1	539.3	530.9	518.6	506.3
80°	415.1	410.8	402.3	390.0	381.7
82.5°	282.2	282.2	278.2	261.5	261.5
85°	169.9	166.0	162.0	149.3	145.3
87.5°	74.9	66.4	58.1	45.8	41.4
90°	2.6	30.5	83.0	77.9	80.4
92.5°	52.5	71.1	73.6	76.1	76.1
95°	123.5	147.2	151.4	151.4	147.2
97.5°	205.6	227.6	236.9	236.9	236.9
100°	300.3	319.7	326.5	326.5	323.9
102.5°	400.1	414.5	423.7	426.3	423.7
105°	509.3	516.0	521.1	525.3	525.3
107.5°	617.5	627.7	627.7	629.4	617.5
110°	722.4	735.9	735.9	735.9	729.2



TEST NUMBER: P912272

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	835.7	850.2	847.6	840.8	835.7
115°	947.4	960.9	956.7	954.2	947.4
117.5°	1058.2	1076.8	1065.0	1058.2	1051.4
120°	1169.9	1188.5	1169.9	1169.9	1162.2
122.5°	1271.4	1295.1	1283.2	1276.5	1271.4
125°	1377.9	1399.1	1392.3	1384.7	1382.3
127.5°	1482.1	1508.2	1498.9	1488.8	1482.1
130°	1579.3	1609.7	1605.5	1600.5	1591.2
132.5°	1688.5	1712.1	1713.8	1702.0	1695.2
135°	1782.3	1808.6	1813.7	1811.1	1804.3
137.5°	1887.2	1908.4	1912.6	1910.9	1900.7
140°	1979.5	2000.5	2012.4	2012.4	2003.1
142.5°	2074.2	2095.3	2102.1	2104.7	2095.3
145°	2163.9	2180.7	2194.3	2196.8	2187.5
147.5°	2244.2	2265.4	2275.4	2279.8	2270.5
150°	2327.1	2341.4	2350.7	2358.4	2350.7
152.5°	2400.7	2415.1	2426.9	2436.3	2426.9
155°	2474.3	2481.1	2488.7	2500.5	2492.9
157.5°	2537.7	2542.8	2547.0	2563.9	2552.1
160°	2594.4	2599.5	2602.0	2616.4	2606.3
162.5°	2646.9	2646.9	2649.4	2665.5	2653.6
165°	2691.7	2689.1	2689.1	2706.1	2694.2
167.5°	2732.2	2724.7	2724.7	2741.6	2729.7
170°	2762.7	2756.0	2753.4	2770.4	2756.0
172.5°	2783.9	2777.2	2774.6	2791.5	2777.2
175°	2800.8	2794.0	2788.9	2805.9	2791.5
177.5°	2810.1	2803.3	2798.2	2812.6	2798.2
180°	2805.9	2805.9	2805.9	2805.9	2805.9

TEST NUMBER: P912272

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.87	12.81	12.75	13.71	14.86	11.42	12.37	12.31	13.27	14.42
	3H	13.54	14.38	14.43	15.30	16.47	13.05	13.89	13.94	14.81	15.98
	4H	14.13	14.93	15.04	15.85	17.03	13.64	14.44	14.55	15.36	16.54
	6H	14.54	15.28	15.46	16.20	17.40	14.04	14.78	14.96	15.70	16.90
	8H	14.65	15.35	15.58	16.29	17.49	14.15	14.85	15.08	15.79	16.99
	12H	14.70	15.37	15.64	16.31	17.53	14.19	14.86	15.13	15.80	17.02
4H	2H	12.34	13.14	13.25	14.06	15.24	11.99	12.78	12.90	13.70	14.88
	3H	14.22	14.89	15.14	15.83	17.03	13.81	14.48	14.74	15.43	16.62
	4H	14.94	15.55	15.88	16.49	17.71	14.52	15.12	15.45	16.07	17.29
	6H	15.46	15.99	16.41	16.96	18.18	15.03	15.56	15.98	16.52	17.75
	8H	15.62	16.11	16.57	17.07	18.31	15.18	15.67	16.13	16.63	17.87
	12H	15.70	16.14	16.67	17.12	18.36	15.25	15.69	16.22	16.67	17.91
8H	4H	15.14	15.63	16.09	16.59	17.83	14.77	15.26	15.72	16.22	17.45
	6H	15.78	16.19	16.76	17.19	18.43	15.40	15.81	16.38	16.81	18.04
	8H	16.01	16.37	16.99	17.36	18.61	15.61	15.97	16.60	16.97	18.22
	12H	16.14	16.46	17.14	17.45	18.75	15.73	16.05	16.72	17.04	18.34
12H	4H	15.13	15.58	16.10	16.55	17.80	14.76	15.21	15.74	16.19	17.43
	6H	15.81	16.17	16.80	17.16	18.42	15.44	15.80	16.43	16.79	18.05
	8H	16.06	16.38	17.05	17.36	18.66	15.68	16.00	16.67	16.98	18.28