

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912292

Luminaire Tested: DFN2DIP-SQ4F0-100D140US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P912292  
REPORT IS A COMBINATION OF REPORTS P900193 AND P896915  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-100D140US850-FLLFLL  
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 24719.6 lumens  
Efficiency: N/A  
Efficacy: 124.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 198.5  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P912292  
CATALOG NUMBER: DFN2DIP-SQ4F0-100D140US850-FLLFLL

### Luminous Intensity Polar Plot

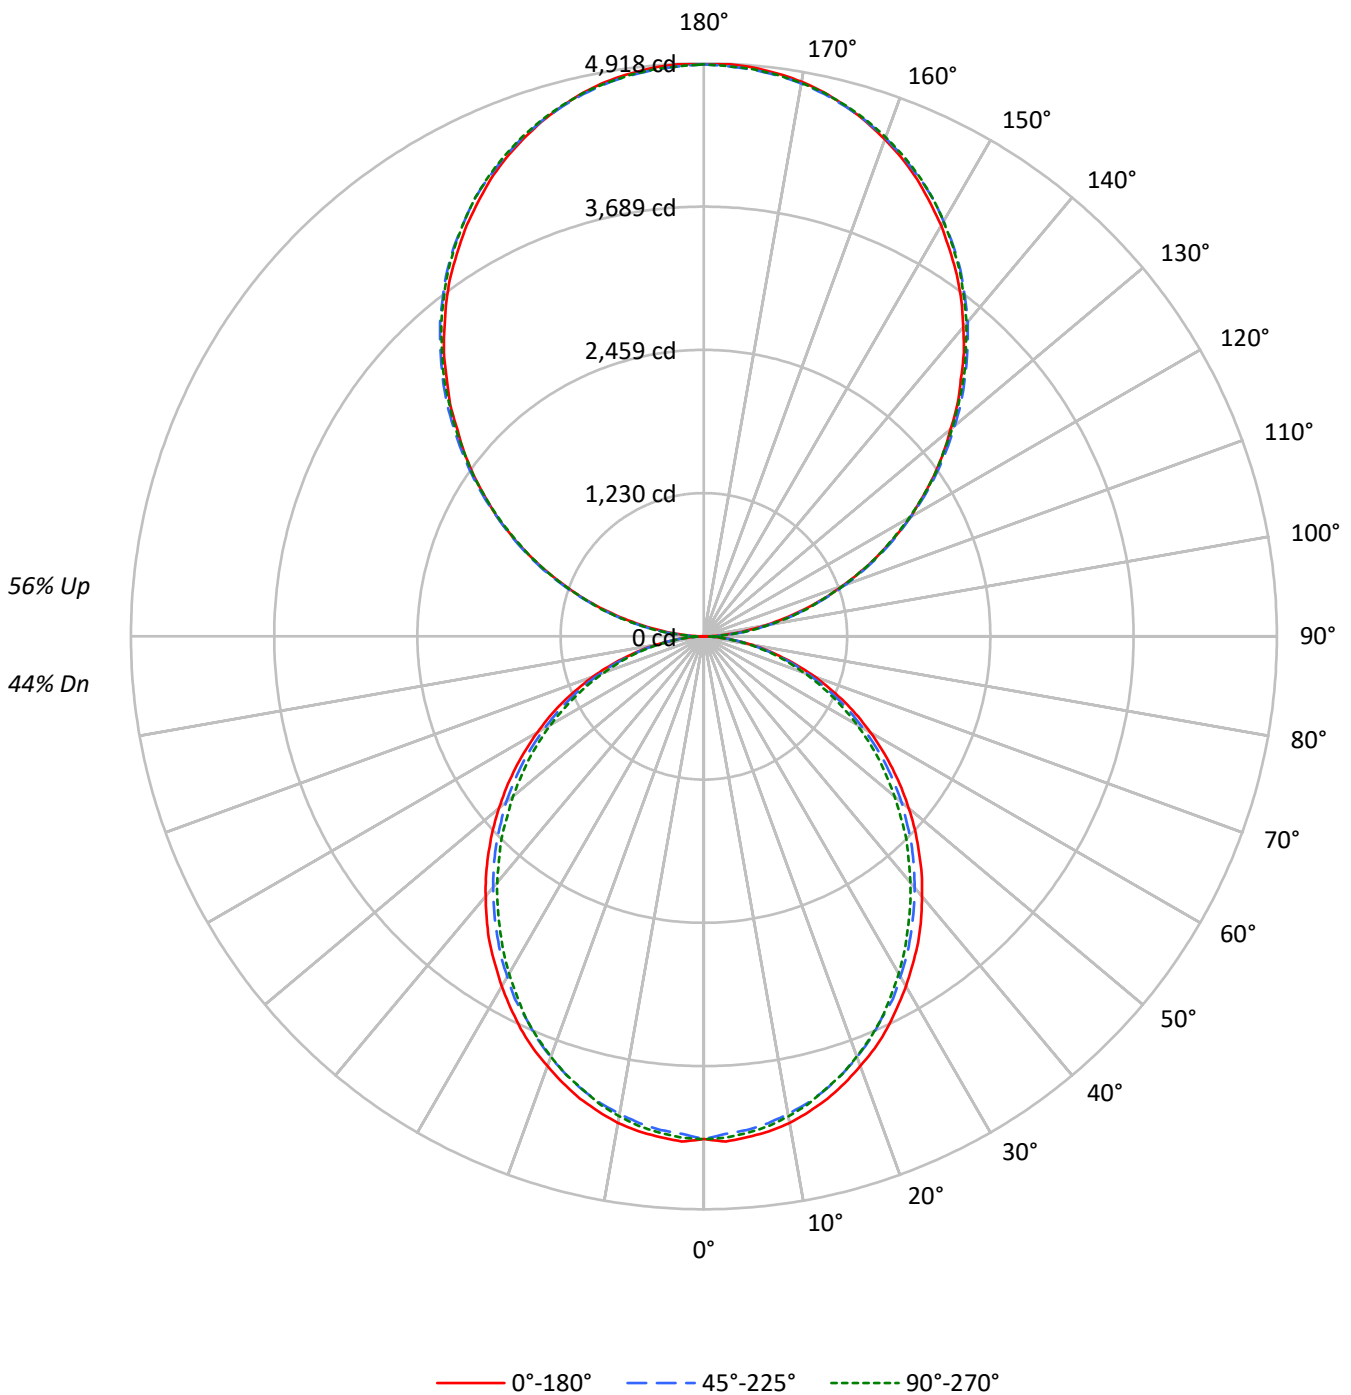



TEST NUMBER: P912292

CATALOG NUMBER: DFN2DIP-SQ4F0-100D140US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44			44
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	37			37
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	31			31
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27			27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	31	29	27	23			23
5	67	56	48	42	61	51	44	39	43	38	34	35	31	28	28	25	23	20			20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17			17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15			15
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14			14
9	49	37	30	25	45	35	28	23	29	24	20	24	20	18	20	17	15	12			12
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	18	15	13	11			11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3028	3028	3028
5°	3033	2986	3007
10°	3008	2947	2967
15°	2964	2899	2904
20°	2904	2832	2840
25°	2845	2752	2765
30°	2770	2677	2670
35°	2699	2590	2570
40°	2612	2501	2475
45°	2526	2412	2377
50°	2431	2319	2264
55°	2332	2211	2160
60°	2219	2083	2041
65°	2097	1950	1901
70°	1941	1789	1750
75°	1725	1595	1613
80°	1465	1349	1347
85°	1059	923	906

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 3864 cd/sqm



TEST NUMBER: P912292

CATALOG NUMBER: DFN2DIP-SQ4F0-100D140US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	406.1	1.6
10°-20°	1142.7	4.6
20°-30°	1679.4	6.8
30°-40°	1950.5	7.9
40°-50°	1948.1	7.9
50°-60°	1698.7	6.9
60°-70°	1255.7	5.1
70°-80°	710.4	2.9
80°-90°	201.5	0.8
90°-100°	303.8	1.2
100°-110°	965.4	3.9
110°-120°	1652.1	6.7
120°-130°	2172.8	8.8
130°-140°	2438.9	9.9
140°-150°	2391.6	9.7
150°-160°	2006.2	8.1
160°-170°	1330.5	5.4
170°-180°	465.0	1.9
0°-30°	3228.3	13.1
0°-40°	5178.7	20.9
0°-60°	8825.5	35.7
0°-90°	10993.1	44.5
90°-120°	2921.4	11.8
90°-150°	9924.8	40.1
90°-180°	13727.0	55.5
0°-180°	24719.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4315	4315	4315	4315	4315	
5°	4315	4299	4253	4286	4278	410
15°	4108	4083	4029	4046	4025	1157
25°	3718	3685	3614	3622	3614	1711
35°	3208	3166	3100	3075	3054	2003
45°	2610	2581	2518	2473	2456	2014
55°	1975	1950	1900	1851	1830	1766
65°	1332	1307	1266	1228	1208	1317
75°	697	689	668	643	652	744
85°	170	166	162	149	145	190
90°	4	53	145	136	141	24
95°	216	258	265	265	258	241
105°	891	903	912	919	919	940
115°	1658	1682	1674	1670	1658	1640
125°	2412	2448	2437	2423	2419	2155
135°	3119	3165	3174	3169	3158	2411
145°	3787	3816	3840	3844	3828	2366
155°	4330	4342	4355	4376	4363	1993
165°	4710	4706	4706	4736	4715	1329
175°	4901	4890	4881	4910	4885	466
180°	4910	4910	4910	4910	4910	



TEST NUMBER: P912292

CATALOG NUMBER: DFN2DIP-SQ4F0-100D140US850-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4315.2	4315.2	4315.2	4315.2	4315.2
2.5°	4340.3	4319.6	4273.8	4315.2	4307.2
5°	4315.2	4298.9	4253.1	4286.2	4278.2
7.5°	4286.2	4261.4	4215.6	4249.1	4240.8
10°	4240.8	4211.8	4162.0	4195.0	4182.7
12.5°	4178.3	4153.6	4103.9	4124.6	4116.2
15°	4107.8	4083.2	4029.0	4045.7	4025.1
17.5°	4020.7	3996.1	3941.8	3962.6	3941.8
20°	3925.1	3900.5	3842.4	3854.7	3838.4
22.5°	3830.0	3792.7	3738.4	3738.4	3730.1
25°	3717.8	3684.8	3614.3	3622.2	3614.3
27.5°	3593.2	3564.1	3510.4	3498.1	3477.4
30°	3469.1	3435.6	3373.5	3361.2	3344.4
32.5°	3336.1	3311.5	3244.9	3219.9	3203.1
35°	3207.6	3166.2	3099.7	3074.6	3053.9
37.5°	3062.3	3024.8	2958.4	2929.3	2908.6
40°	2913.0	2879.5	2813.1	2776.2	2759.4
42.5°	2767.7	2734.2	2668.3	2626.4	2601.8
45°	2610.1	2581.1	2518.5	2473.2	2456.5
47.5°	2456.5	2427.5	2361.0	2315.1	2290.5
50°	2294.5	2273.8	2215.7	2157.6	2136.9
52.5°	2136.9	2107.9	2054.1	2008.4	1979.3
55°	1975.4	1950.3	1900.5	1850.7	1830.1
57.5°	1813.3	1792.6	1738.5	1688.8	1672.0
60°	1651.3	1635.0	1576.9	1531.1	1518.8
62.5°	1493.7	1464.7	1423.3	1381.9	1365.2
65°	1332.1	1307.1	1265.7	1228.2	1207.6
67.5°	1166.2	1145.0	1108.1	1079.1	1062.3
70°	1012.5	995.8	958.4	929.3	913.0
72.5°	854.9	838.2	817.6	788.5	776.1
75°	696.9	689.0	667.8	643.2	651.5
77.5°	556.1	539.3	530.9	518.6	506.3
80°	415.1	410.8	402.3	390.0	381.7
82.5°	282.2	282.2	278.2	261.5	261.5
85°	169.9	166.0	162.0	149.3	145.3
87.5°	74.9	66.4	58.1	45.8	41.4
90°	4.4	53.3	145.1	136.2	140.6
92.5°	91.8	124.3	128.8	133.2	133.2
95°	216.1	257.6	264.9	264.9	257.6
97.5°	359.8	398.2	414.5	414.5	414.5
100°	525.6	559.6	571.4	571.4	566.9
102.5°	700.2	725.4	741.7	746.1	741.7
105°	891.2	903.1	911.9	919.3	919.3
107.5°	1080.6	1098.5	1098.5	1101.3	1080.6
110°	1264.3	1287.9	1287.9	1287.9	1276.0



TEST NUMBER: P912292

CATALOG NUMBER: DFN2DIP-SQ4F0-100D140US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1462.5	1487.7	1483.3	1471.4	1462.5
115°	1658.0	1681.7	1674.3	1669.8	1658.0
117.5°	1851.9	1884.5	1863.8	1851.9	1840.1
120°	2047.3	2079.9	2047.3	2047.3	2034.0
122.5°	2225.0	2266.4	2245.7	2233.9	2225.0
125°	2411.5	2448.5	2436.6	2423.3	2418.8
127.5°	2593.5	2639.4	2623.1	2605.4	2593.5
130°	2763.7	2817.1	2809.7	2800.8	2784.5
132.5°	2954.7	2996.2	2999.2	2978.4	2966.6
135°	3119.1	3165.0	3173.8	3169.4	3157.5
137.5°	3302.6	3339.6	3347.1	3344.1	3326.3
140°	3464.0	3501.0	3521.7	3521.7	3505.4
142.5°	3629.8	3666.8	3678.7	3683.1	3666.8
145°	3786.7	3816.3	3840.0	3844.5	3828.2
147.5°	3927.3	3964.3	3982.1	3989.5	3973.2
150°	4072.4	4097.5	4113.8	4127.1	4113.8
152.5°	4201.2	4226.4	4247.1	4263.3	4247.1
155°	4330.0	4341.8	4355.2	4375.9	4362.6
157.5°	4441.0	4449.9	4457.3	4486.9	4466.2
160°	4540.2	4549.1	4553.6	4578.7	4560.9
162.5°	4632.0	4632.0	4636.4	4664.6	4643.8
165°	4710.5	4706.0	4706.0	4735.7	4714.9
167.5°	4781.5	4768.1	4768.1	4797.8	4777.0
170°	4834.8	4822.9	4818.5	4848.1	4822.9
172.5°	4871.8	4860.0	4855.5	4885.1	4860.0
175°	4901.4	4889.6	4880.7	4910.3	4885.1
177.5°	4917.6	4905.9	4897.0	4922.1	4897.0
180°	4910.3	4910.3	4910.3	4910.3	4910.3



TEST NUMBER: P912292  
 CATALOG NUMBER: DFN2DIP-SQ4F0-100D140US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.60	11.41	11.60	12.43	13.77	10.15	10.97	11.16	11.98	13.33
	3H	12.26	12.99	13.27	14.01	15.38	11.77	12.50	12.78	13.52	14.89
	4H	12.85	13.54	13.87	14.56	15.94	12.35	13.04	13.38	14.07	15.45
	6H	13.25	13.89	14.28	14.91	16.30	12.75	13.38	13.78	14.41	15.80
	8H	13.35	13.96	14.40	15.01	16.39	12.85	13.46	13.89	14.50	15.89
	12H	13.40	13.98	14.45	15.02	16.43	12.89	13.47	13.94	14.51	15.92
4H	2H	11.05	11.74	12.09	12.77	14.15	10.70	11.39	11.73	12.42	13.79
	3H	12.92	13.50	13.96	14.55	15.94	12.51	13.09	13.55	14.14	15.53
	4H	13.64	14.16	14.68	15.21	16.62	13.21	13.74	14.26	14.79	16.20
	6H	14.15	14.61	15.21	15.68	17.08	13.72	14.17	14.78	15.24	16.65
	8H	14.30	14.73	15.36	15.79	17.21	13.87	14.29	14.92	15.35	16.77
	12H	14.38	14.76	15.45	15.84	17.26	13.93	14.31	15.00	15.39	16.81
8H	4H	13.83	14.25	14.89	15.31	16.74	13.45	13.88	14.51	14.94	16.36
	6H	14.46	14.81	15.54	15.92	17.34	14.08	14.43	15.16	15.53	16.95
	8H	14.69	14.99	15.77	16.08	17.52	14.29	14.60	15.38	15.69	17.13
	12H	14.82	15.09	15.91	16.17	17.65	14.41	14.68	15.50	15.76	17.24
12H	4H	13.81	14.20	14.89	15.27	16.70	13.44	13.83	14.52	14.90	16.33
	6H	14.49	14.80	15.58	15.89	17.33	14.12	14.43	15.21	15.52	16.96
	8H	14.74	15.01	15.83	16.09	17.57	14.36	14.63	15.45	15.71	17.19