

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912390

Luminaire Tested: DFN2DIP-SQ4F0-140D100US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912390
REPORT IS A COMBINATION OF REPORTS P900146 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D100US850-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 23011.7 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 218.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912390

CATALOG NUMBER: DFN2DIP-SQ4F0-140D100US850-RLLFLL

Luminous Intensity Polar Plot

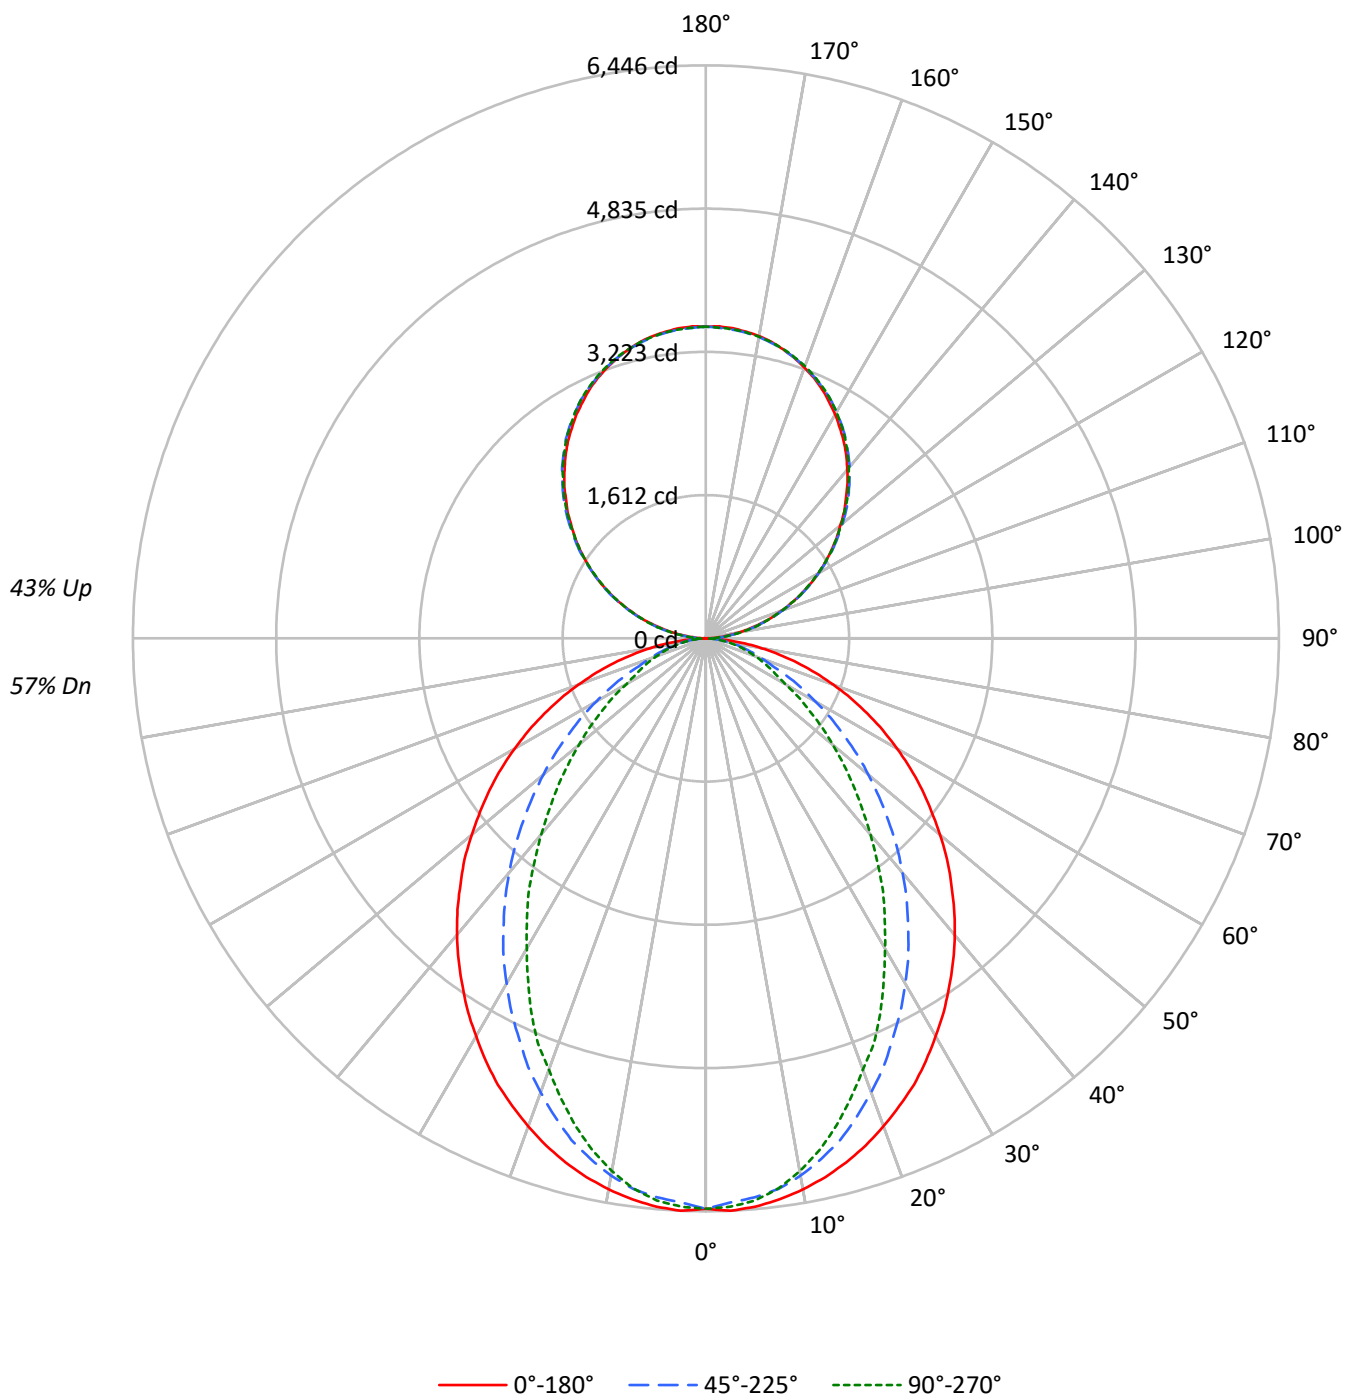

TEST NUMBER: P912390

CATALOG NUMBER: DFN2DIP-SQ4F0-140D100US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63
1	100	96	92	89	93	89	86	83	78	75	73	67	65	63	56	55	54
2	92	84	78	73	85	79	74	69	69	65	61	59	56	54	50	48	47
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	42	40
4	77	66	59	53	72	62	56	50	55	49	45	47	43	40	41	38	35
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31
6	66	54	46	40	61	51	43	38	45	39	35	39	34	31	34	30	28
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	27	25
8	57	44	37	32	53	42	35	30	37	32	28	33	28	25	29	25	22
9	53	41	33	28	49	38	32	27	34	29	25	30	26	23	26	23	20
10	49	37	30	26	46	35	29	25	32	26	23	28	24	21	25	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4503	4503	4503
5°	4510	4432	4461
10°	4465	4346	4317
15°	4403	4203	4094
20°	4322	4006	3819
25°	4239	3785	3554
30°	4127	3558	3218
35°	4017	3314	2922
40°	3906	3061	2583
45°	3776	2781	2276
50°	3642	2498	1975
55°	3502	2195	1686
60°	3340	1879	1389
65°	3154	1557	1252
70°	2928	1257	1135
75°	2644	1110	1035
80°	2234	934	903
85°	1555	628	687

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3776 cd/sqm

TEST NUMBER: P912390

CATALOG NUMBER: DFN2DIP-SQ4F0-140D100US850-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	601.4	2.6
10°-20°	1651.0	7.2
20°-30°	2317.9	10.1
30°-40°	2526.6	11.0
40°-50°	2322.3	10.1
50°-60°	1823.8	7.9
60°-70°	1187.1	5.2
70°-80°	611.1	2.7
80°-90°	166.0	0.7
90°-100°	217.0	0.9
100°-110°	689.6	3.0
110°-120°	1180.1	5.1
120°-130°	1552.0	6.7
130°-140°	1742.1	7.6
140°-150°	1708.3	7.4
150°-160°	1433.0	6.2
160°-170°	950.4	4.1
170°-180°	332.2	1.4
0°-30°	4570.2	19.9
0°-40°	7096.9	30.8
0°-60°	11242.9	48.9
0°-90°	13207.0	57.4
90°-120°	2086.7	9.1
90°-150°	7089.1	30.8
90°-180°	9805.0	42.6
0°-180°	23011.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	6417	6417	6417	6417	6417	
5°	6417	6388	6312	6365	6347	608
15°	6103	6039	5842	5732	5674	1720
25°	5540	5354	4971	4733	4646	2548
35°	4774	4477	3967	3601	3472	2988
45°	3902	3513	2904	2491	2352	3014
55°	2967	2514	1887	1539	1429	2651
65°	2004	1533	1010	813	795	1986
75°	1068	662	465	424	418	1130
85°	250	128	110	110	110	286
90°	3	38	104	97	100	23
95°	154	184	189	189	184	172
105°	637	645	651	657	657	672
115°	1184	1201	1196	1193	1184	1171
125°	1722	1749	1740	1731	1728	1539
135°	2228	2261	2267	2264	2255	1722
145°	2705	2726	2743	2746	2734	1690
155°	3093	3101	3111	3126	3116	1424
165°	3365	3361	3361	3383	3368	949
175°	3501	3493	3486	3507	3489	333
180°	3507	3507	3507	3507	3507	

TEST NUMBER: P912390

CATALOG NUMBER: DFN2DIP-SQ4F0-140D100US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	6416.9	6416.9	6416.9	6416.9	6416.9
2.5°	6445.8	6416.9	6352.8	6411.4	6399.6
5°	6416.9	6388.0	6312.1	6364.6	6347.3
7.5°	6364.6	6330.0	6248.7	6271.5	6242.6
10°	6294.9	6254.2	6138.4	6120.5	6086.0
12.5°	6208.0	6155.6	5998.5	5964.0	5900.0
15°	6103.3	6039.2	5842.0	5731.8	5673.9
17.5°	5981.3	5888.2	5644.3	5516.7	5423.7
20°	5842.0	5725.5	5435.4	5290.6	5162.5
22.5°	5691.1	5557.4	5220.4	5023.2	4936.4
25°	5540.1	5354.0	4970.9	4733.0	4645.5
27.5°	5360.2	5162.5	4738.5	4465.6	4332.0
30°	5168.6	4947.5	4482.9	4187.1	4030.0
32.5°	4982.5	4715.1	4239.5	3890.8	3745.4
35°	4773.7	4477.4	3966.6	3600.6	3472.4
37.5°	4570.4	4250.6	3710.8	3309.8	3165.0
40°	4355.4	4007.3	3443.4	3031.3	2880.4
42.5°	4134.8	3763.3	3176.7	2746.7	2601.8
45°	3902.5	3513.1	2903.8	2490.9	2351.7
47.5°	3681.9	3269.8	2642.5	2229.8	2102.2
50°	3437.9	3025.8	2386.8	1985.8	1864.3
52.5°	3199.5	2763.8	2142.8	1759.7	1649.3
55°	2967.2	2514.3	1887.2	1539.1	1428.7
57.5°	2729.4	2264.8	1661.1	1335.8	1242.7
60°	2485.4	2020.8	1422.6	1126.9	1033.8
62.5°	2247.6	1783.1	1219.3	940.8	894.6
65°	2003.6	1532.9	1010.4	813.2	795.4
67.5°	1771.3	1300.6	813.2	714.1	696.8
70°	1527.3	1074.5	673.4	615.5	592.1
72.5°	1295.1	865.0	563.2	516.9	505.3
75°	1068.3	661.7	464.6	423.9	418.3
77.5°	842.3	470.1	366.0	342.6	330.8
80°	632.8	337.0	278.5	255.7	255.7
82.5°	441.2	226.7	191.6	179.9	179.9
85°	249.5	127.5	110.2	110.2	110.2
87.5°	93.0	46.2	46.2	40.7	40.7
90°	3.2	38.0	103.6	97.3	100.5
92.5°	65.5	88.8	92.0	95.2	95.2
95°	154.4	184.0	189.3	189.3	184.0
97.5°	257.0	284.5	296.1	296.1	296.1
100°	375.4	399.7	408.1	408.1	405.0
102.5°	500.2	518.1	529.8	532.9	529.8
105°	636.6	645.0	651.3	656.6	656.6
107.5°	771.9	784.6	784.6	786.7	771.9
110°	903.1	919.9	919.9	919.9	911.5



TEST NUMBER: P912390

CATALOG NUMBER: DFN2DIP-SQ4F0-140D100US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1044.7	1062.6	1059.5	1051.0	1044.7
115°	1184.3	1201.2	1195.9	1192.7	1184.3
117.5°	1322.8	1346.1	1331.2	1322.8	1314.3
120°	1462.3	1485.6	1462.3	1462.3	1452.9
122.5°	1589.2	1618.8	1604.1	1595.6	1589.2
125°	1722.5	1748.9	1740.5	1730.9	1727.8
127.5°	1852.6	1885.3	1873.7	1861.0	1852.6
130°	1974.1	2012.2	2007.0	2000.5	1989.0
132.5°	2110.5	2140.1	2142.3	2127.5	2119.0
135°	2227.9	2260.7	2267.0	2263.9	2255.4
137.5°	2359.1	2385.5	2390.8	2388.7	2375.9
140°	2474.3	2500.7	2515.5	2515.5	2503.9
142.5°	2592.7	2619.1	2627.6	2630.8	2619.1
145°	2704.7	2725.9	2742.9	2746.0	2734.4
147.5°	2805.2	2831.7	2844.4	2849.7	2838.0
150°	2908.9	2926.9	2938.5	2947.9	2938.5
152.5°	3000.8	3018.8	3033.7	3045.3	3033.7
155°	3092.9	3101.3	3110.9	3125.6	3116.1
157.5°	3172.2	3178.5	3183.8	3204.9	3190.1
160°	3243.0	3249.4	3252.5	3270.4	3257.8
162.5°	3308.6	3308.6	3311.7	3331.8	3317.0
165°	3364.6	3361.4	3361.4	3382.6	3367.8
167.5°	3415.4	3405.8	3405.8	3427.0	3412.2
170°	3453.4	3445.0	3441.8	3463.0	3445.0
172.5°	3479.8	3471.4	3468.2	3489.4	3471.4
175°	3501.0	3492.6	3486.3	3507.3	3489.4
177.5°	3512.6	3504.2	3497.8	3515.8	3497.8
180°	3507.3	3507.3	3507.3	3507.3	3507.3

TEST NUMBER: P912390

CATALOG NUMBER: DFN2DIP-SQ4F0-140D100US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.05	13.94	13.95	14.86	16.02	9.01	9.91	9.91	10.82	11.98
	3H	14.74	15.54	15.65	16.46	17.65	10.20	11.00	11.12	11.93	13.12
	4H	15.35	16.11	16.28	17.03	18.23	10.66	11.41	11.58	12.34	13.54
	6H	15.78	16.48	16.72	17.41	18.62	10.98	11.68	11.92	12.61	13.82
	8H	15.91	16.57	16.85	17.52	18.73	11.08	11.74	12.02	12.69	13.90
	12H	15.98	16.61	16.93	17.55	18.78	11.12	11.75	12.07	12.70	13.93
4H	2H	13.08	13.83	14.01	14.76	15.96	9.62	10.37	10.55	11.30	12.50
	3H	14.92	15.54	15.86	16.50	17.72	10.97	11.60	11.91	12.56	13.77
	4H	15.61	16.19	16.56	17.14	18.38	11.52	12.10	12.48	13.05	14.29
	6H	16.14	16.63	17.10	17.61	18.84	11.95	12.44	12.91	13.42	14.66
	8H	16.32	16.78	17.28	17.75	19.00	12.08	12.54	13.04	13.51	14.76
	12H	16.42	16.83	17.40	17.82	19.07	12.15	12.56	13.13	13.55	14.81
8H	4H	15.59	16.05	16.55	17.02	18.27	11.81	12.27	12.78	13.24	14.49
	6H	16.16	16.54	17.15	17.55	18.80	12.33	12.71	13.32	13.73	14.98
	8H	16.38	16.71	17.38	17.72	18.98	12.53	12.86	13.53	13.86	15.13
	12H	16.52	16.82	17.53	17.81	19.13	12.65	12.94	13.65	13.94	15.25
12H	4H	15.54	15.96	16.53	16.94	18.20	11.82	12.23	12.80	13.22	14.48
	6H	16.14	16.47	17.13	17.47	18.74	12.38	12.72	13.38	13.72	14.99
	8H	16.36	16.66	17.36	17.65	18.97	12.60	12.89	13.60	13.89	15.20