

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912426

Luminaire Tested: DFN2DIP-SQ4F0-160D100US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912426
REPORT IS A COMBINATION OF REPORTS P900148 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-160D100US850-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 24897.1 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 241.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912426

CATALOG NUMBER: DFN2DIP-SQ4F0-160D100US850-RLLFLL

Luminous Intensity Polar Plot

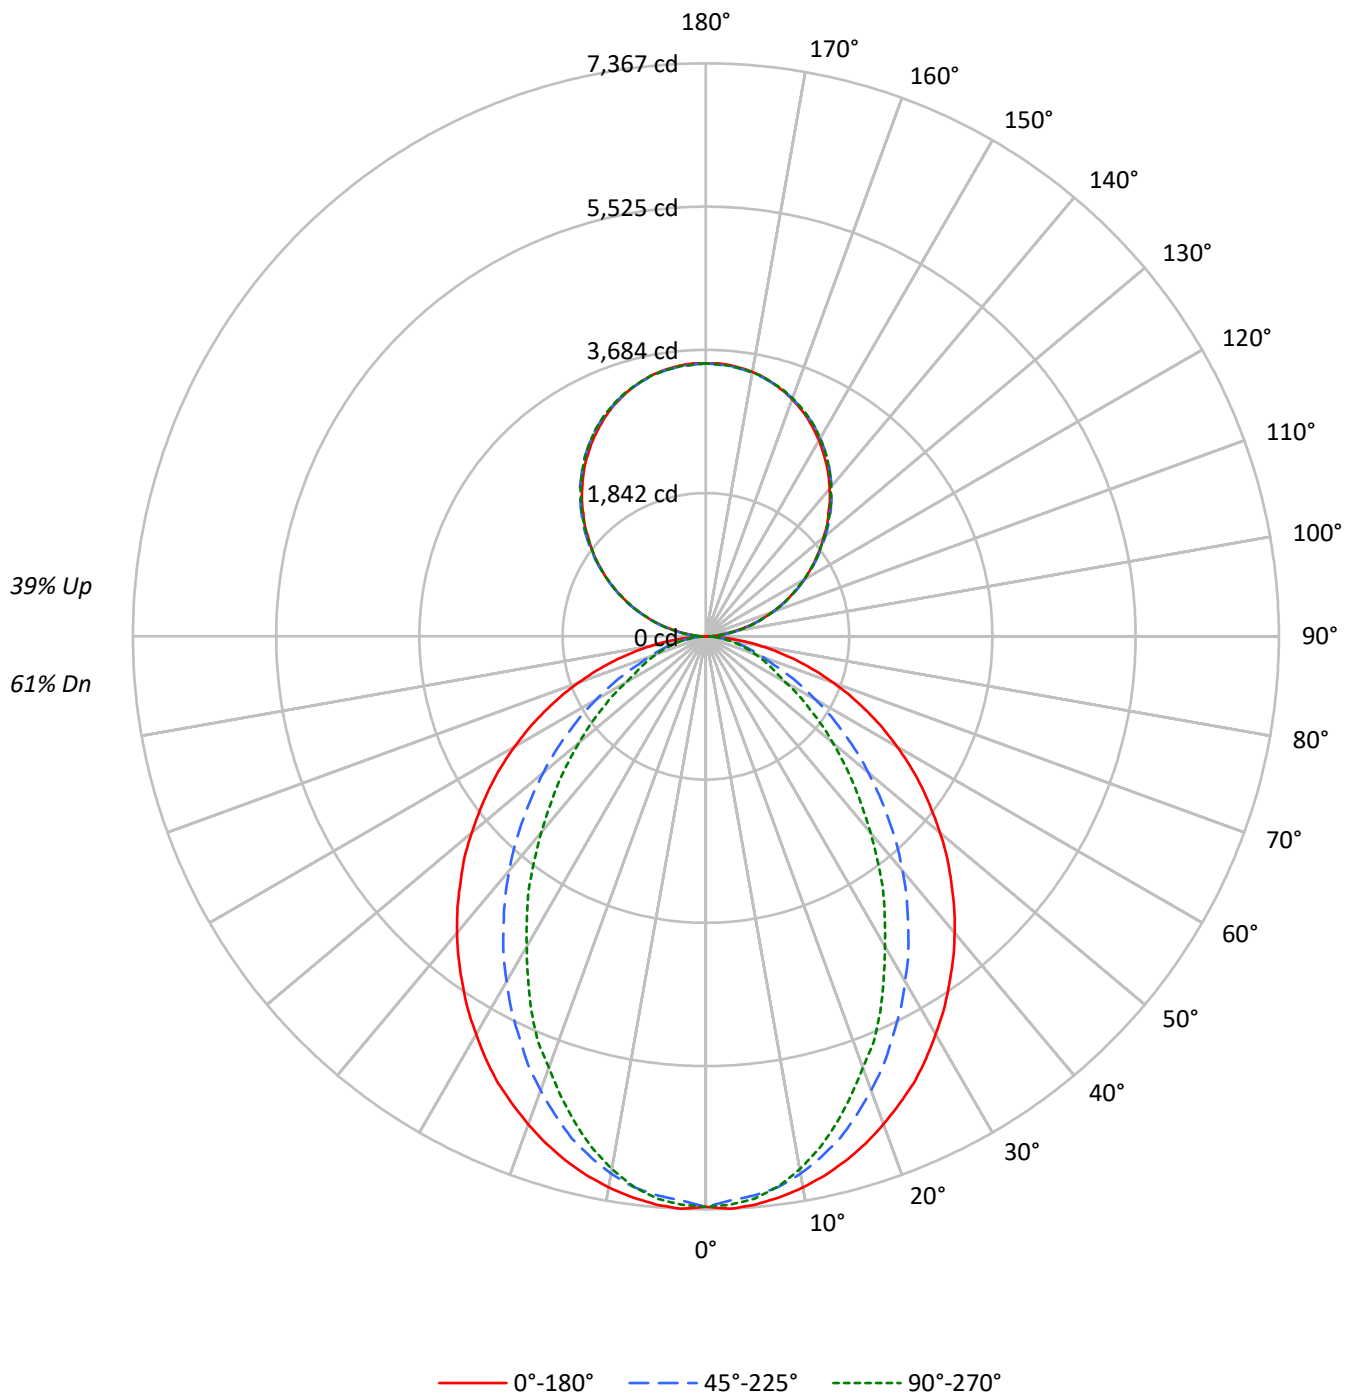

TEST NUMBER: P912426

CATALOG NUMBER: DFN2DIP-SQ4F0-160D100US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	101	97	93	89	94	91	87	84	79	77	75	69	67	65	59	58	57
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49
3	85	75	68	62	79	71	64	59	62	57	53	55	51	48	47	45	42
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	43	39	37
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	32
6	66	54	46	41	62	51	44	39	46	40	35	40	36	32	35	32	29
7	61	49	41	36	57	47	39	34	42	36	32	37	32	29	32	29	26
8	57	45	37	32	53	43	36	31	38	32	28	34	29	26	30	26	23
9	53	41	34	29	50	39	32	28	35	29	26	31	27	23	28	24	21
10	50	38	31	26	47	36	29	25	32	27	23	29	25	21	26	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5146	5146	5146
5°	5154	5065	5098
10°	5103	4967	4934
15°	5033	4804	4678
20°	4940	4578	4365
25°	4844	4325	4062
30°	4716	4066	3678
35°	4591	3787	3340
40°	4464	3499	2952
45°	4316	3178	2601
50°	4162	2855	2257
55°	4003	2509	1927
60°	3817	2147	1588
65°	3605	1780	1431
70°	3346	1436	1297
75°	3022	1268	1183
80°	2553	1068	1031
85°	1777	719	786

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4316 cd/sqm

TEST NUMBER: P912426

CATALOG NUMBER: DFN2DIP-SQ4F0-160D100US850-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	687.3	2.8
10°-20°	1886.8	7.6
20°-30°	2649.0	10.6
30°-40°	2887.6	11.6
40°-50°	2654.0	10.7
50°-60°	2084.3	8.4
60°-70°	1356.7	5.4
70°-80°	698.4	2.8
80°-90°	188.3	0.8
90°-100°	217.0	0.9
100°-110°	689.6	2.8
110°-120°	1180.1	4.7
120°-130°	1552.0	6.2
130°-140°	1742.1	7.0
140°-150°	1708.3	6.9
150°-160°	1433.0	5.8
160°-170°	950.4	3.8
170°-180°	332.2	1.3
0°-30°	5223.1	21.0
0°-40°	8110.7	32.6
0°-60°	12849.0	51.6
0°-90°	15092.4	60.6
90°-120°	2086.7	8.4
90°-150°	7089.1	28.5
90°-180°	9805.0	39.4
0°-180°	24897.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	7334	7334	7334	7334	7334	
5°	7334	7300	7214	7274	7254	695
15°	6975	6902	6677	6550	6484	1966
25°	6332	6119	5681	5409	5309	2912
35°	5456	5117	4533	4115	3969	3415
45°	4460	4015	3319	2847	2688	3444
55°	3391	2874	2157	1759	1633	3030
65°	2290	1752	1155	930	909	2270
75°	1221	756	531	484	478	1291
85°	285	146	126	126	126	327
90°	3	38	104	97	100	24
95°	154	184	189	189	184	172
105°	637	645	651	657	657	672
115°	1184	1201	1196	1193	1184	1171
125°	1722	1749	1740	1731	1728	1539
135°	2228	2261	2267	2264	2255	1722
145°	2705	2726	2743	2746	2734	1690
155°	3093	3101	3111	3126	3116	1424
165°	3365	3361	3361	3383	3368	949
175°	3501	3493	3486	3507	3489	333
180°	3507	3507	3507	3507	3507	

TEST NUMBER: P912426

CATALOG NUMBER: DFN2DIP-SQ4F0-160D100US850-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	7333.6	7333.6	7333.6	7333.6	7333.6
2.5°	7366.6	7333.6	7260.3	7327.3	7313.9
5°	7333.6	7300.4	7213.8	7273.7	7254.0
7.5°	7273.7	7234.2	7141.3	7167.4	7134.3
10°	7194.2	7147.7	7015.3	6994.9	6955.4
12.5°	7094.8	7035.1	6855.5	6816.0	6742.8
15°	6975.2	6902.0	6676.6	6550.5	6484.3
17.5°	6835.8	6729.4	6450.6	6304.8	6198.5
20°	6676.6	6543.5	6211.8	6046.4	5900.0
22.5°	6504.1	6351.2	5966.1	5740.8	5641.5
25°	6331.6	6118.9	5681.0	5409.1	5309.2
27.5°	6126.0	5900.0	5415.5	5103.6	4950.8
30°	5907.0	5654.2	5123.2	4785.3	4605.8
32.5°	5694.4	5388.7	4845.1	4446.6	4280.4
35°	5455.6	5116.9	4533.3	4114.9	3968.6
37.5°	5223.3	4857.9	4241.0	3782.6	3617.1
40°	4977.5	4579.7	3935.4	3464.3	3291.8
42.5°	4725.4	4300.8	3630.5	3139.0	2973.6
45°	4460.0	4015.0	3318.6	2846.8	2687.7
47.5°	4207.9	3736.9	3020.0	2548.3	2402.5
50°	3929.1	3458.0	2727.8	2269.5	2130.7
52.5°	3656.6	3158.8	2449.0	2011.1	1885.0
55°	3391.1	2873.5	2156.8	1758.9	1632.9
57.5°	3119.3	2588.4	1898.4	1526.5	1420.2
60°	2840.5	2309.6	1625.8	1287.9	1181.5
62.5°	2568.7	2037.8	1393.5	1075.2	1022.4
65°	2289.9	1751.9	1154.8	929.5	909.0
67.5°	2024.4	1486.4	929.5	816.1	796.4
70°	1745.6	1228.0	769.6	703.4	676.7
72.5°	1480.1	988.6	643.6	590.8	577.3
75°	1221.0	756.2	530.9	484.4	478.1
77.5°	962.5	537.2	418.2	391.5	378.2
80°	723.2	385.2	318.3	292.2	292.2
82.5°	504.2	259.2	219.0	205.6	205.6
85°	285.1	145.7	126.1	126.1	126.1
87.5°	106.4	52.8	52.8	46.5	46.5
90°	3.2	38.0	103.6	97.3	100.5
92.5°	65.5	88.8	92.0	95.2	95.2
95°	154.4	184.0	189.3	189.3	184.0
97.5°	257.0	284.5	296.1	296.1	296.1
100°	375.4	399.7	408.1	408.1	405.0
102.5°	500.2	518.1	529.8	532.9	529.8
105°	636.6	645.0	651.3	656.6	656.6
107.5°	771.9	784.6	784.6	786.7	771.9
110°	903.1	919.9	919.9	919.9	911.5



TEST NUMBER: P912426

CATALOG NUMBER: DFN2DIP-SQ4F0-160D100US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1044.7	1062.6	1059.5	1051.0	1044.7
115°	1184.3	1201.2	1195.9	1192.7	1184.3
117.5°	1322.8	1346.1	1331.2	1322.8	1314.3
120°	1462.3	1485.6	1462.3	1462.3	1452.9
122.5°	1589.2	1618.8	1604.1	1595.6	1589.2
125°	1722.5	1748.9	1740.5	1730.9	1727.8
127.5°	1852.6	1885.3	1873.7	1861.0	1852.6
130°	1974.1	2012.2	2007.0	2000.5	1989.0
132.5°	2110.5	2140.1	2142.3	2127.5	2119.0
135°	2227.9	2260.7	2267.0	2263.9	2255.4
137.5°	2359.1	2385.5	2390.8	2388.7	2375.9
140°	2474.3	2500.7	2515.5	2515.5	2503.9
142.5°	2592.7	2619.1	2627.6	2630.8	2619.1
145°	2704.7	2725.9	2742.9	2746.0	2734.4
147.5°	2805.2	2831.7	2844.4	2849.7	2838.0
150°	2908.9	2926.9	2938.5	2947.9	2938.5
152.5°	3000.8	3018.8	3033.7	3045.3	3033.7
155°	3092.9	3101.3	3110.9	3125.6	3116.1
157.5°	3172.2	3178.5	3183.8	3204.9	3190.1
160°	3243.0	3249.4	3252.5	3270.4	3257.8
162.5°	3308.6	3308.6	3311.7	3331.8	3317.0
165°	3364.6	3361.4	3361.4	3382.6	3367.8
167.5°	3415.4	3405.8	3405.8	3427.0	3412.2
170°	3453.4	3445.0	3441.8	3463.0	3445.0
172.5°	3479.8	3471.4	3468.2	3489.4	3471.4
175°	3501.0	3492.6	3486.3	3507.3	3489.4
177.5°	3512.6	3504.2	3497.8	3515.8	3497.8
180°	3507.3	3507.3	3507.3	3507.3	3507.3

TEST NUMBER: P912426

CATALOG NUMBER: DFN2DIP-SQ4F0-160D100US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.79	14.71	14.66	15.60	16.71	9.75	10.67	10.62	11.56	12.67
	3H	15.48	16.30	16.36	17.20	18.34	10.94	11.77	11.82	12.67	13.81
	4H	16.09	16.87	16.99	17.77	18.92	11.40	12.18	12.30	13.08	14.23
	6H	16.52	17.24	17.43	18.15	19.31	11.73	12.45	12.63	13.35	14.51
	8H	16.65	17.34	17.57	18.26	19.42	11.82	12.50	12.74	13.43	14.59
	12H	16.72	17.37	17.64	18.29	19.48	11.87	12.52	12.79	13.43	14.62
4H	2H	13.82	14.60	14.72	15.50	16.65	10.36	11.14	11.26	12.04	13.19
	3H	15.66	16.31	16.57	17.24	18.40	11.72	12.37	12.63	13.30	14.46
	4H	16.36	16.95	17.28	17.88	19.07	12.27	12.86	13.19	13.79	14.98
	6H	16.88	17.39	17.82	18.34	19.53	12.70	13.20	13.63	14.15	15.35
	8H	17.06	17.54	18.00	18.48	19.69	12.83	13.30	13.76	14.25	15.45
	12H	17.17	17.59	18.12	18.55	19.77	12.90	13.32	13.85	14.29	15.50
8H	4H	16.33	16.81	17.27	17.75	18.96	12.56	13.03	13.50	13.98	15.18
	6H	16.91	17.30	17.87	18.29	19.49	13.08	13.47	14.05	14.46	15.66
	8H	17.13	17.48	18.10	18.45	19.67	13.27	13.62	14.25	14.60	15.82
	12H	17.27	17.58	18.25	18.55	19.82	13.40	13.70	14.37	14.67	15.94
12H	4H	16.29	16.72	17.25	17.68	18.89	12.57	13.00	13.53	13.96	15.17
	6H	16.88	17.23	17.86	18.21	19.43	13.13	13.48	14.11	14.46	15.68
	8H	17.11	17.42	18.09	18.39	19.66	13.35	13.65	14.33	14.62	15.89