

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914950

Luminaire Tested: DFN2DIP-SQ4F0-080D140US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914950
REPORT IS A COMBINATION OF REPORTS P900190 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-080D140US927-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15202.0 lumens
Efficiency: N/A
Efficacy: 85.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 177.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914950

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US927-RLLFLL

Luminous Intensity Polar Plot

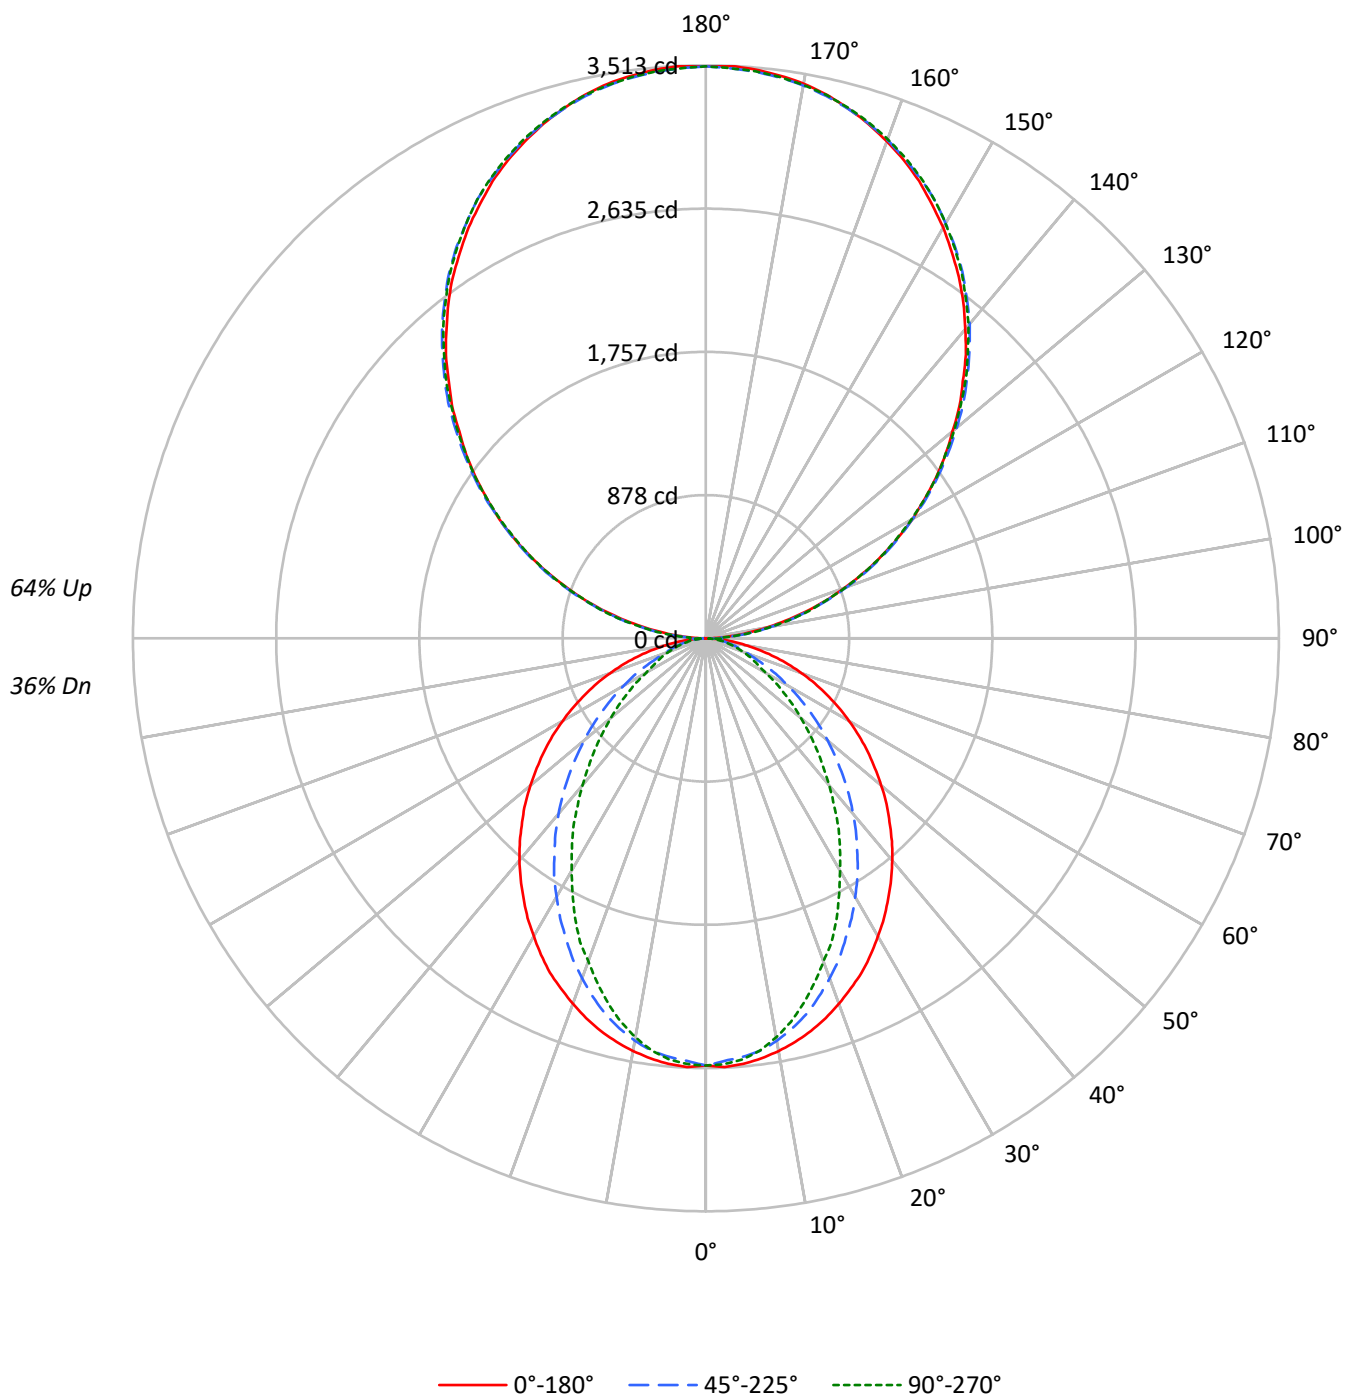

TEST NUMBER: P914950

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43
1	95	91	87	84	86	82	79	76	66	64	62	52	50	49	38	37	37
2	87	80	74	69	78	72	67	63	59	55	52	46	44	42	34	33	31
3	79	70	63	58	71	64	58	53	52	48	44	41	38	36	31	29	27
4	73	62	55	49	65	57	50	45	46	42	38	37	33	31	27	25	24
5	67	56	48	42	60	51	44	39	42	37	33	33	29	27	25	23	21
6	61	50	42	37	55	46	39	34	37	32	29	30	26	24	23	20	18
7	57	45	37	32	51	41	35	30	34	29	25	27	24	21	21	18	17
8	53	41	33	28	48	38	31	26	31	26	23	25	21	19	19	17	15
9	49	37	30	25	44	34	28	24	28	24	20	23	19	17	18	15	14
10	46	34	27	23	42	31	25	21	26	21	18	21	18	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1838	1838	1838
5°	1841	1809	1821
10°	1822	1774	1762
15°	1797	1716	1671
20°	1764	1635	1559
25°	1730	1545	1451
30°	1685	1452	1313
35°	1640	1353	1193
40°	1594	1250	1054
45°	1541	1135	929
50°	1487	1020	806
55°	1430	896	688
60°	1363	767	567
65°	1287	636	511
70°	1195	513	463
75°	1079	453	423
80°	912	381	368
85°	635	256	280

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2759 cd/sqm

TEST NUMBER: P914950

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	245.5	1.6
10°-20°	673.9	4.4
20°-30°	946.1	6.2
30°-40°	1031.3	6.8
40°-50°	947.9	6.2
50°-60°	744.4	4.9
60°-70°	484.5	3.2
70°-80°	249.4	1.6
80°-90°	73.6	0.5
90°-100°	217.0	1.4
100°-110°	689.6	4.5
110°-120°	1180.2	7.8
120°-130°	1552.1	10.2
130°-140°	1742.2	11.5
140°-150°	1708.4	11.2
150°-160°	1433.1	9.4
160°-170°	950.4	6.3
170°-180°	332.2	2.2
0°-30°	1865.5	12.3
0°-40°	2896.8	19.1
0°-60°	4589.2	30.2
0°-90°	5396.8	35.5
90°-120°	2086.8	13.7
90°-150°	7089.5	46.6
90°-180°	9805.0	64.5
0°-180°	15202.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2619	2619	2619	2619	2619	
5°	2619	2608	2576	2598	2591	248
15°	2491	2465	2385	2340	2316	702
25°	2261	2186	2029	1932	1896	1040
35°	1948	1828	1619	1470	1417	1220
45°	1593	1434	1185	1017	960	1230
55°	1211	1026	770	628	583	1082
65°	818	626	412	332	325	811
75°	436	270	190	173	171	461
85°	102	52	45	45	45	117
90°	3	38	104	97	100	15
95°	154	184	189	189	184	172
105°	637	645	651	657	657	672
115°	1184	1201	1196	1193	1184	1171
125°	1723	1749	1740	1731	1728	1539
135°	2228	2261	2267	2264	2256	1722
145°	2705	2726	2743	2746	2734	1690
155°	3093	3102	3111	3126	3116	1424
165°	3365	3362	3362	3383	3368	949
175°	3501	3493	3486	3508	3490	333
180°	3508	3508	3508	3508	3508	

TEST NUMBER: P914950

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2619.3	2619.3	2619.3	2619.3	2619.3
2.5°	2631.1	2619.3	2593.1	2617.0	2612.2
5°	2619.3	2607.5	2576.5	2597.9	2590.8
7.5°	2597.9	2583.8	2550.6	2559.9	2548.1
10°	2569.4	2552.9	2505.6	2498.3	2484.2
12.5°	2534.0	2512.6	2448.5	2434.4	2408.2
15°	2491.3	2465.1	2384.6	2339.6	2315.9
17.5°	2441.4	2403.5	2303.9	2251.9	2213.8
20°	2384.6	2337.1	2218.7	2159.6	2107.2
22.5°	2323.0	2268.4	2130.9	2050.4	2014.9
25°	2261.4	2185.5	2029.0	1932.0	1896.2
27.5°	2187.9	2107.2	1934.2	1822.8	1768.2
30°	2109.7	2019.4	1829.9	1709.1	1645.0
32.5°	2033.8	1924.7	1730.5	1588.2	1528.8
35°	1948.5	1827.6	1619.1	1469.7	1417.4
37.5°	1865.5	1735.0	1514.7	1351.0	1291.9
40°	1777.8	1635.7	1405.6	1237.3	1175.7
42.5°	1687.7	1536.1	1296.6	1121.2	1062.0
45°	1592.9	1434.0	1185.3	1016.8	960.0
47.5°	1502.9	1334.7	1078.6	910.1	858.1
50°	1403.3	1235.1	974.3	810.6	761.0
52.5°	1306.0	1128.1	874.6	718.3	673.3
55°	1211.2	1026.3	770.3	628.2	583.2
57.5°	1114.1	924.5	678.0	545.3	507.2
60°	1014.5	824.9	580.7	459.9	422.0
62.5°	917.4	727.8	497.7	384.0	365.2
65°	817.8	625.7	412.4	332.0	324.6
67.5°	723.0	530.9	332.0	291.4	284.5
70°	623.4	438.6	274.9	251.2	241.7
72.5°	528.6	353.1	229.9	211.0	206.2
75°	436.1	270.1	189.6	173.0	170.8
77.5°	343.8	191.9	149.4	139.8	135.1
80°	258.3	137.6	113.7	104.3	104.3
82.5°	180.1	92.5	78.2	73.4	73.4
85°	101.9	52.0	45.0	45.0	45.0
87.5°	37.9	18.9	18.9	16.6	16.6
90°	3.2	38.1	103.6	97.3	100.4
92.5°	65.6	88.8	92.0	95.1	95.1
95°	154.4	184.0	189.3	189.3	184.0
97.5°	257.0	284.5	296.1	296.1	296.1
100°	375.4	399.7	408.1	408.1	405.0
102.5°	500.2	518.2	529.8	533.0	529.8
105°	636.6	645.1	651.4	656.6	656.6
107.5°	771.9	784.7	784.7	786.7	771.9
110°	903.1	920.0	920.0	920.0	911.5

TEST NUMBER: P914950

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1044.7	1062.7	1059.5	1051.1	1044.7
115°	1184.3	1201.3	1196.0	1192.8	1184.3
117.5°	1322.9	1346.2	1331.3	1322.9	1314.4
120°	1462.4	1485.7	1462.4	1462.4	1452.9
122.5°	1589.4	1618.9	1604.2	1595.7	1589.4
125°	1722.6	1749.0	1740.5	1731.0	1727.8
127.5°	1852.6	1885.4	1873.7	1861.1	1852.6
130°	1974.2	2012.3	2007.0	2000.7	1989.0
132.5°	2110.6	2140.2	2142.4	2127.6	2119.1
135°	2228.0	2260.8	2267.1	2264.0	2255.5
137.5°	2359.1	2385.6	2390.9	2388.7	2376.1
140°	2474.4	2500.8	2515.7	2515.7	2504.0
142.5°	2592.8	2619.3	2627.7	2630.9	2619.3
145°	2704.9	2726.1	2743.0	2746.2	2734.5
147.5°	2805.4	2831.8	2844.5	2849.8	2838.1
150°	2909.0	2927.0	2938.6	2948.1	2938.6
152.5°	3001.0	3019.0	3033.8	3045.4	3033.8
155°	3093.0	3101.5	3111.0	3125.8	3116.3
157.5°	3172.3	3178.6	3183.9	3205.1	3190.3
160°	3243.2	3249.5	3252.7	3270.7	3257.9
162.5°	3308.7	3308.7	3311.9	3332.0	3317.2
165°	3364.8	3361.6	3361.6	3382.8	3368.0
167.5°	3415.5	3406.0	3406.0	3427.1	3412.3
170°	3453.6	3445.1	3441.9	3463.1	3445.1
172.5°	3480.1	3471.6	3468.4	3489.6	3471.6
175°	3501.2	3492.7	3486.4	3507.5	3489.6
177.5°	3512.8	3504.4	3498.0	3515.9	3498.0
180°	3507.5	3507.5	3507.5	3507.5	3507.5

TEST NUMBER: P914950

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.74	8.47	8.82	9.54	11.01	3.71	4.43	4.78	5.50	6.97
	3H	9.42	10.07	10.51	11.15	12.63	4.89	5.53	5.97	6.62	8.10
	4H	10.02	10.64	11.12	11.72	13.21	5.33	5.95	6.43	7.03	8.52
	6H	10.45	11.01	11.55	12.10	13.60	5.65	6.21	6.76	7.30	8.80
	8H	10.57	11.11	11.68	12.21	13.71	5.74	6.27	6.85	7.38	8.87
	12H	10.63	11.14	11.75	12.24	13.76	5.78	6.29	6.89	7.38	8.90
4H	2H	7.75	8.36	8.85	9.45	10.94	4.29	4.90	5.40	5.99	7.48
	3H	9.57	10.08	10.68	11.20	12.70	5.63	6.14	6.74	7.25	8.76
	4H	10.27	10.73	11.38	11.84	13.36	6.18	6.64	7.29	7.75	9.27
	6H	10.78	11.18	11.90	12.31	13.82	6.59	6.99	7.71	8.12	9.63
	8H	10.95	11.33	12.08	12.45	13.98	6.72	7.09	7.84	8.21	9.74
	12H	11.05	11.39	12.19	12.52	14.05	6.78	7.12	7.92	8.25	9.78
8H	4H	10.23	10.60	11.35	11.72	13.25	6.45	6.83	7.57	7.94	9.47
	6H	10.79	11.10	11.94	12.26	13.79	6.97	7.28	8.11	8.43	9.96
	8H	11.01	11.28	12.16	12.42	13.97	7.16	7.43	8.31	8.57	10.12
	12H	11.15	11.39	12.30	12.52	14.11	7.27	7.51	8.43	8.65	10.23
12H	4H	10.17	10.51	11.31	11.64	13.18	6.45	6.79	7.59	7.92	9.46
	6H	10.77	11.04	11.92	12.18	13.73	7.02	7.29	8.17	8.43	9.97
	8H	10.99	11.22	12.14	12.36	13.94	7.22	7.46	8.38	8.60	10.18