

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914971

Luminaire Tested: DFN2DIP-SQ4F0-090D090US927-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P914971  
REPORT IS A COMBINATION OF REPORTS P901640 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-090D090US927-RLLONL  
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 13118.5 lumens  
Efficiency: N/A  
Efficacy: 87.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 149.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.983  
Total Harmonic Distortion (THDi): 0.073  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P914971  
CATALOG NUMBER: DFN2DIP-SQ4F0-090D090US927-RLLONL

### Luminous Intensity Polar Plot

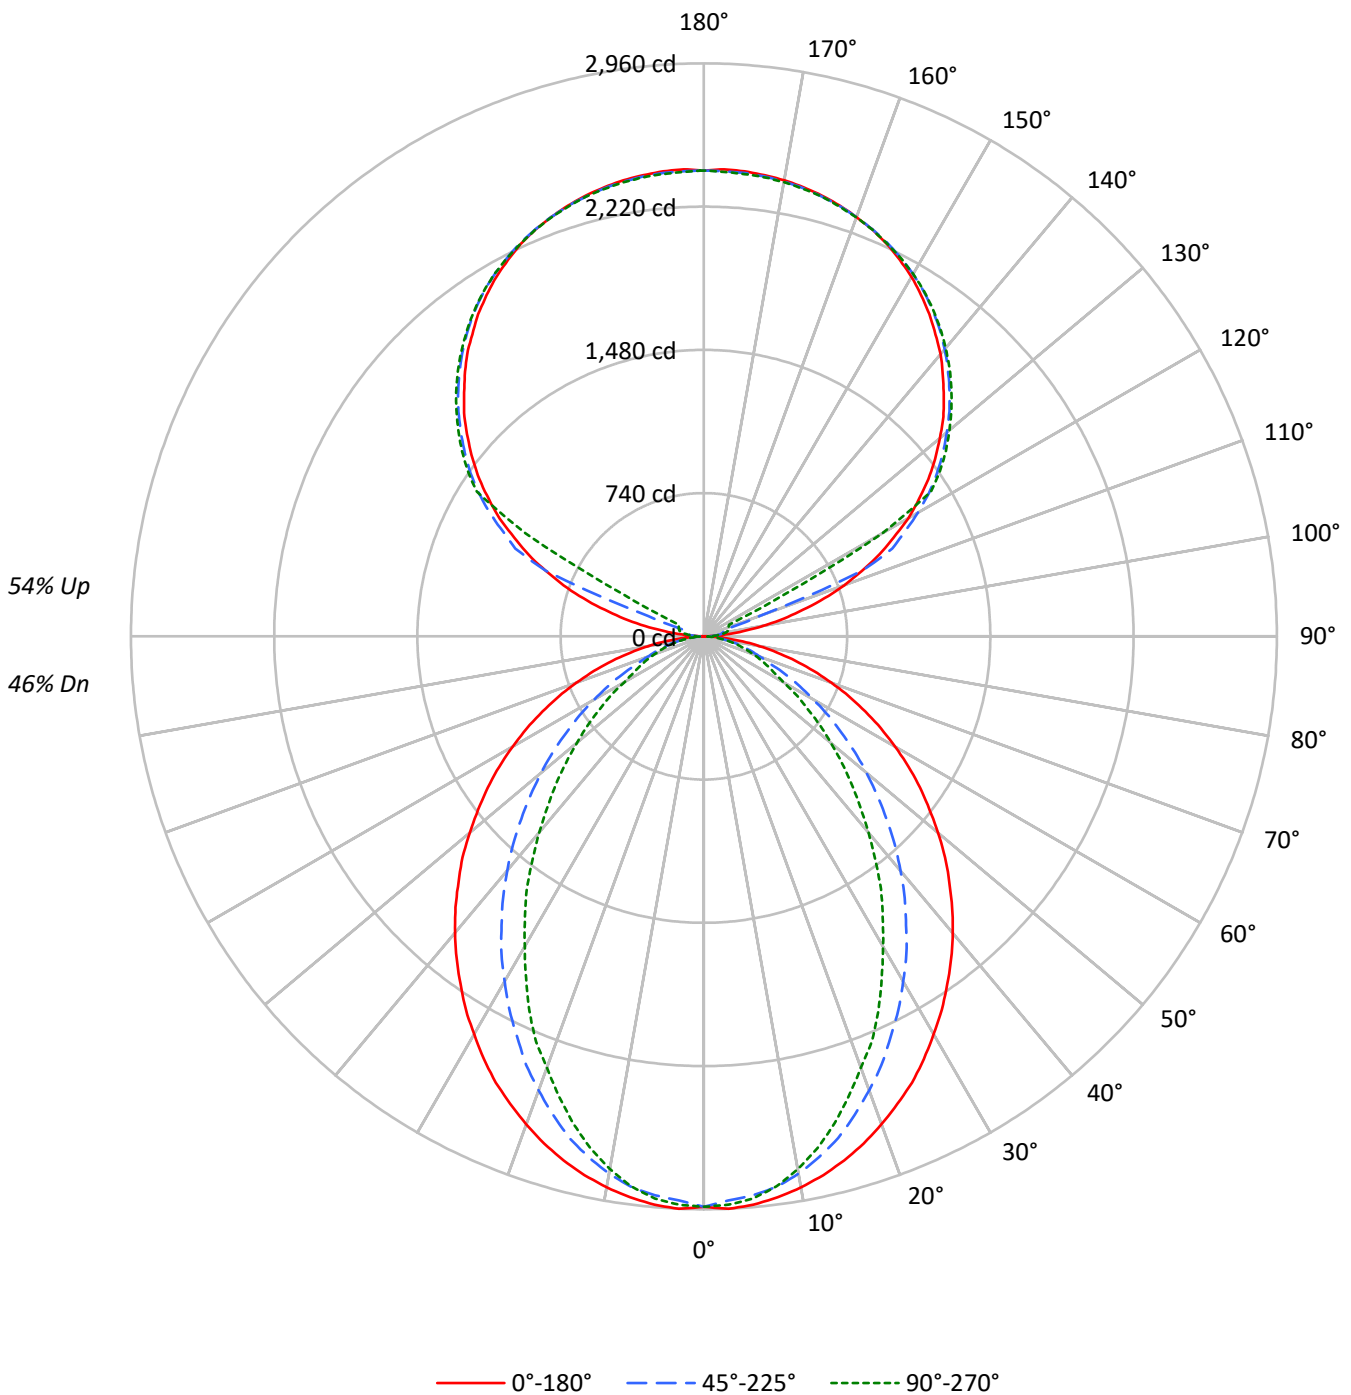



TEST NUMBER: P914971

CATALOG NUMBER: DFN2DIP-SQ4F0-090D090US927-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13			13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2068	2068	2068
5°	2071	2035	2048
10°	2050	1996	1982
15°	2022	1930	1880
20°	1985	1840	1754
25°	1947	1738	1632
30°	1895	1634	1478
35°	1845	1522	1342
40°	1794	1406	1186
45°	1734	1277	1045
50°	1672	1147	907
55°	1608	1008	774
60°	1534	863	638
65°	1448	715	575
70°	1345	577	521
75°	1214	510	475
80°	1026	429	414
85°	714	288	315

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1734 cd/sqm



TEST NUMBER: P914971

CATALOG NUMBER: DFN2DIP-SQ4F0-090D090US927-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	276.2	2.1
10°-20°	758.1	5.8
20°-30°	1064.4	8.1
30°-40°	1160.3	8.8
40°-50°	1066.4	8.1
50°-60°	837.5	6.4
60°-70°	545.1	4.2
70°-80°	280.6	2.1
80°-90°	75.9	0.6
90°-100°	79.3	0.6
100°-110°	295.8	2.3
110°-120°	784.4	6.0
120°-130°	1301.0	9.9
130°-140°	1382.0	10.5
140°-150°	1284.4	9.8
150°-160°	1032.6	7.9
160°-170°	665.4	5.1
170°-180°	229.0	1.7
0°-30°	2098.7	16.0
0°-40°	3258.9	24.8
0°-60°	5162.8	39.4
0°-90°	6064.4	46.2
90°-120°	1159.5	8.8
90°-150°	5127.0	39.1
90°-180°	7054.0	53.8
0°-180°	13118.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2947	2947	2947	2947	2947	
5°	2947	2933	2899	2923	2915	279
15°	2803	2773	2683	2632	2606	790
25°	2544	2459	2283	2173	2133	1170
35°	2192	2056	1822	1653	1595	1372
45°	1792	1613	1333	1144	1080	1384
55°	1363	1155	867	707	656	1218
65°	920	704	464	373	365	912
75°	491	304	213	195	192	519
85°	114	58	51	51	51	132
90°	2	21	35	44	47	12
95°	113	56	68	77	75	134
105°	529	582	106	125	132	566
115°	1001	1031	1074	268	143	986
125°	1415	1438	1471	1483	1489	1262
135°	1752	1780	1795	1813	1809	1353
145°	2032	2030	2060	2072	2063	1271
155°	2237	2222	2243	2253	2239	1031
165°	2357	2347	2352	2364	2352	666
175°	2411	2399	2403	2415	2398	229
180°	2406	2406	2406	2406	2406	



TEST NUMBER: P914971

CATALOG NUMBER: DFN2DIP-SQ4F0-090D090US927-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2946.7	2946.7	2946.7	2946.7	2946.7
2.5°	2960.0	2946.7	2917.2	2944.1	2938.8
5°	2946.7	2933.4	2898.6	2922.6	2914.7
7.5°	2922.6	2906.8	2869.4	2879.9	2866.6
10°	2890.7	2872.0	2818.8	2810.6	2794.7
12.5°	2850.7	2826.7	2754.6	2738.7	2709.3
15°	2802.7	2773.3	2682.7	2632.0	2605.5
17.5°	2746.7	2704.0	2591.9	2533.3	2490.6
20°	2682.7	2629.2	2495.9	2429.5	2370.6
22.5°	2613.4	2552.0	2397.2	2306.7	2266.8
25°	2544.1	2458.6	2282.7	2173.4	2133.3
27.5°	2461.5	2370.6	2176.0	2050.6	1989.2
30°	2373.5	2271.9	2058.6	1922.8	1850.6
32.5°	2288.0	2165.2	1946.8	1786.7	1719.9
35°	2192.1	2056.0	1821.5	1653.4	1594.6
37.5°	2098.7	1951.9	1704.1	1519.9	1453.4
40°	2000.0	1840.2	1581.3	1392.0	1322.7
42.5°	1898.7	1728.1	1458.7	1261.3	1194.8
45°	1792.1	1613.3	1333.4	1143.8	1079.9
47.5°	1690.8	1501.5	1213.5	1023.9	965.4
50°	1578.7	1389.4	1096.1	911.9	856.1
52.5°	1469.3	1269.2	984.0	808.0	757.4
55°	1362.6	1154.6	866.6	706.8	656.1
57.5°	1253.4	1040.1	762.8	613.4	570.7
60°	1141.3	928.0	653.3	517.5	474.8
62.5°	1032.1	818.8	559.9	432.1	410.8
65°	920.0	703.9	464.0	373.4	365.3
67.5°	813.4	597.2	373.4	327.9	320.0
70°	701.4	493.4	309.3	282.7	271.9
72.5°	594.7	397.2	258.6	237.3	232.0
75°	490.6	303.9	213.3	194.6	192.1
77.5°	386.7	215.9	168.0	157.3	151.9
80°	290.6	154.8	127.9	117.4	117.4
82.5°	202.6	104.1	88.0	82.6	82.6
85°	114.5	58.5	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	1.7	20.9	34.7	43.6	46.9
92.5°	43.6	36.6	41.7	45.3	46.9
95°	113.1	55.6	67.8	76.7	74.9
97.5°	203.7	61.0	88.7	94.0	95.7
100°	308.2	69.7	99.3	113.1	116.6
102.5°	423.0	419.7	102.7	121.8	127.1
105°	529.3	581.6	106.2	125.3	132.3
107.5°	652.9	696.3	109.8	128.8	135.9
110°	771.3	807.8	304.8	130.6	137.5



TEST NUMBER: P914971

CATALOG NUMBER: DFN2DIP-SQ4F0-090D090US927-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	882.8	914.0	884.5	134.0	139.3
115°	1001.1	1030.6	1074.3	268.2	142.8
117.5°	1103.8	1138.6	1168.3	919.2	463.1
120°	1218.8	1244.8	1276.3	1297.1	1062.1
122.5°	1316.2	1344.1	1379.0	1389.3	1391.2
125°	1415.4	1438.1	1471.2	1483.4	1488.6
127.5°	1505.9	1530.3	1556.6	1574.0	1575.6
130°	1591.3	1619.3	1638.3	1657.5	1655.9
132.5°	1678.4	1701.1	1720.1	1735.9	1734.2
135°	1751.6	1779.5	1795.0	1812.6	1809.1
137.5°	1828.1	1849.0	1866.5	1883.9	1878.7
140°	1902.9	1917.0	1936.0	1951.7	1943.1
142.5°	1965.8	1978.0	2000.5	2014.4	2005.7
145°	2031.9	2030.0	2059.7	2071.9	2063.2
147.5°	2089.2	2084.1	2113.6	2122.3	2115.4
150°	2145.1	2132.9	2160.8	2171.1	2162.4
152.5°	2192.0	2178.1	2204.2	2214.7	2202.5
155°	2237.3	2221.8	2242.6	2253.0	2239.1
157.5°	2273.9	2260.0	2275.7	2287.9	2273.9
160°	2305.2	2294.7	2305.2	2315.6	2303.4
162.5°	2333.0	2322.6	2331.3	2343.5	2327.8
165°	2357.4	2347.0	2352.2	2364.4	2352.2
167.5°	2376.6	2366.1	2371.4	2383.6	2367.9
170°	2392.3	2381.8	2385.3	2397.5	2381.8
172.5°	2402.7	2392.3	2395.8	2408.0	2392.3
175°	2411.3	2399.1	2402.7	2414.8	2397.5
177.5°	2414.8	2402.7	2404.5	2416.7	2401.0
180°	2406.2	2406.2	2406.2	2406.2	2406.2



TEST NUMBER: P914971  
 CATALOG NUMBER: DFN2DIP-SQ4F0-090D090US927-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.32	10.12	10.32	11.12	12.45	5.28	6.08	6.28	7.08	8.41
	3H	11.00	11.72	12.01	12.73	14.07	6.47	7.18	7.47	8.20	9.54
	4H	11.61	12.29	12.63	13.30	14.66	6.92	7.59	7.94	8.61	9.96
	6H	12.03	12.66	13.06	13.68	15.04	7.24	7.86	8.27	8.88	10.25
	8H	12.16	12.75	13.20	13.79	15.15	7.33	7.92	8.36	8.96	10.32
	12H	12.22	12.79	13.26	13.82	15.20	7.37	7.93	8.41	8.96	10.35
4H	2H	9.34	10.01	10.36	11.03	12.38	5.88	6.55	6.90	7.57	8.92
	3H	11.17	11.73	12.20	12.77	14.14	7.22	7.79	8.26	8.83	10.20
	4H	11.86	12.38	12.90	13.41	14.80	7.77	8.29	8.81	9.32	10.71
	6H	12.38	12.82	13.43	13.88	15.27	8.19	8.63	9.24	9.69	11.08
	8H	12.56	12.97	13.61	14.02	15.42	8.32	8.73	9.37	9.78	11.18
	12H	12.65	13.02	13.72	14.09	15.50	8.38	8.75	9.45	9.82	11.23
8H	4H	11.83	12.24	12.88	13.29	14.69	8.05	8.46	9.10	9.51	10.92
	6H	12.40	12.74	13.47	13.83	15.23	8.57	8.91	9.64	10.00	11.40
	8H	12.62	12.91	13.70	13.99	15.41	8.76	9.06	9.84	10.14	11.56
	12H	12.76	13.02	13.84	14.09	15.55	8.88	9.14	9.96	10.21	11.68
12H	4H	11.78	12.15	12.85	13.21	14.62	8.06	8.43	9.12	9.49	10.90
	6H	12.37	12.67	13.45	13.75	15.17	8.62	8.92	9.70	10.00	11.42
	8H	12.59	12.86	13.68	13.93	15.39	8.83	9.09	9.92	10.17	11.63