

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915006

Luminaire Tested: DFN2DIP-SQ4F0-100D090US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915006
REPORT IS A COMBINATION OF REPORTS P900122 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-100D090US927-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13043.3 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 159.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915006

CATALOG NUMBER: DFN2DIP-SQ4F0-100D090US927-RLLFLL

Luminous Intensity Polar Plot

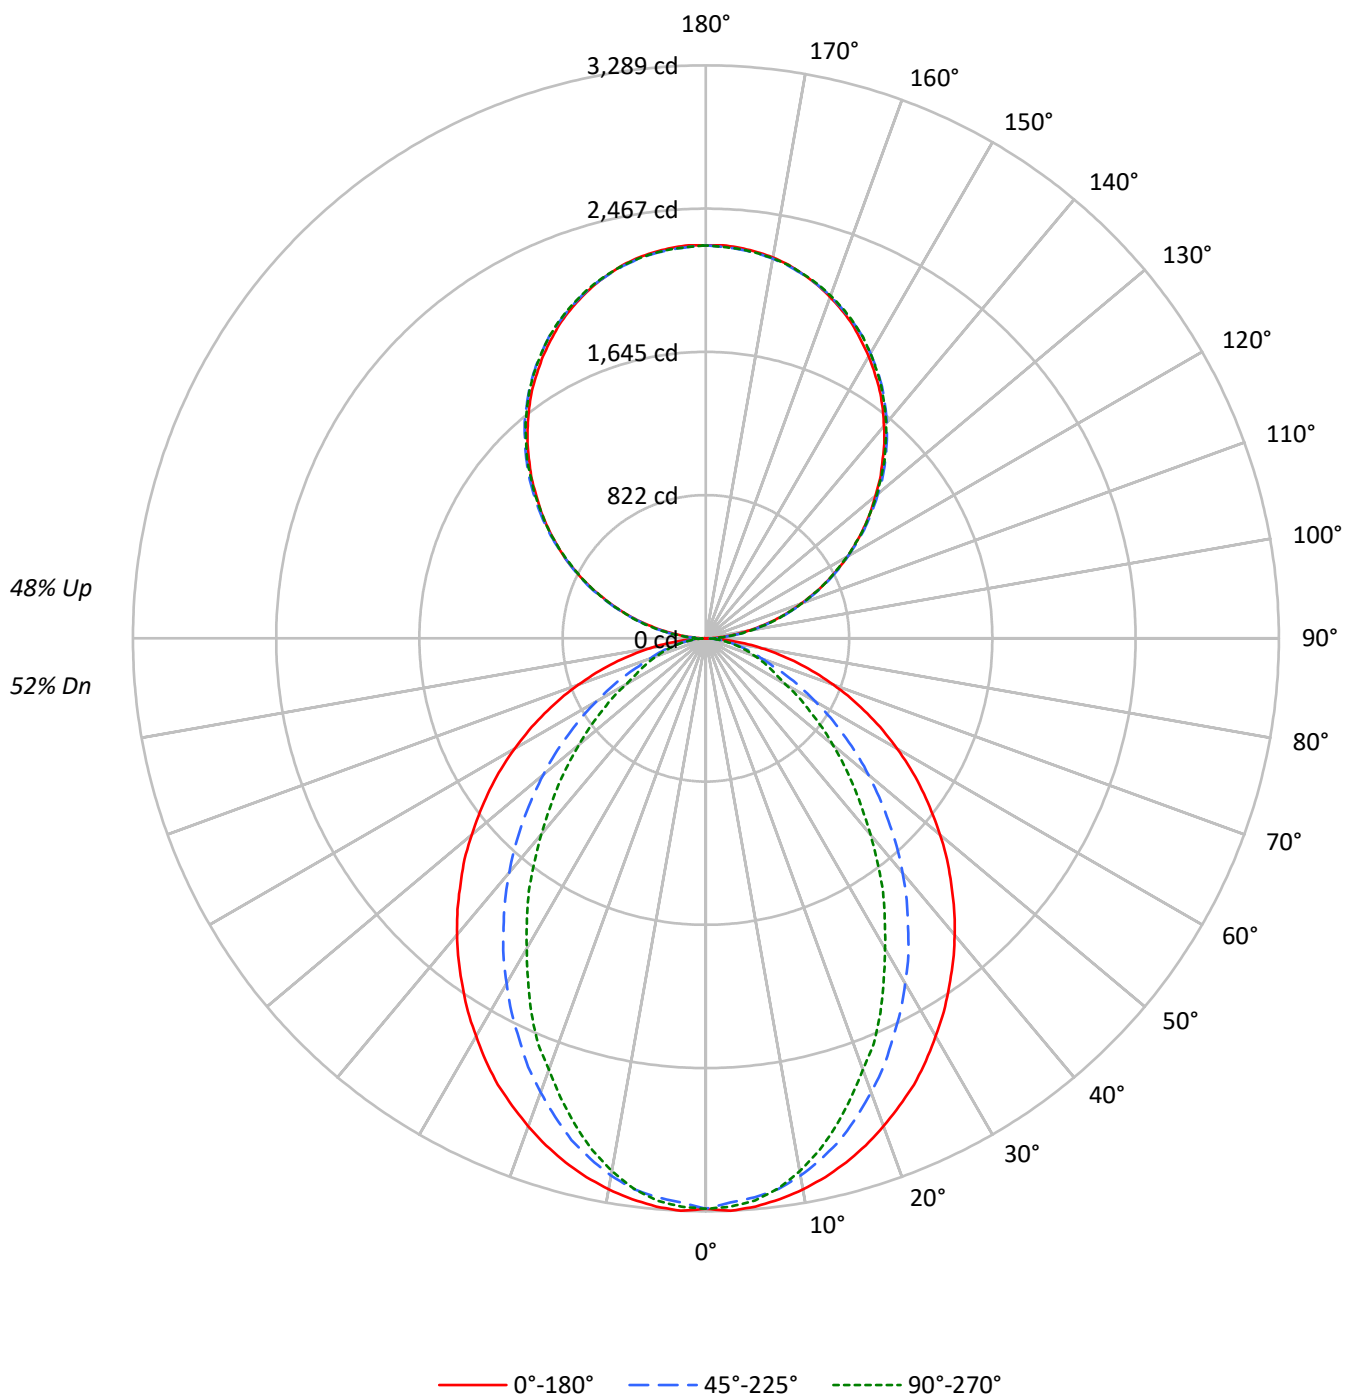

TEST NUMBER: P915006

CATALOG NUMBER: DFN2DIP-SQ4F0-100D090US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58
1	99	94	91	87	91	88	84	82	75	72	70	63	61	60	52	51	50
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43
3	83	73	66	61	76	68	62	57	59	54	50	50	46	43	41	39	37
4	76	65	58	52	70	61	54	49	52	47	43	45	41	38	37	34	32
5	70	59	51	45	64	55	48	42	47	42	38	40	36	33	34	31	28
6	64	53	45	39	60	49	42	37	43	37	33	37	32	29	31	28	25
7	60	48	40	35	55	45	38	33	39	33	29	33	29	26	28	25	23
8	56	43	36	31	51	41	34	29	36	30	26	31	26	23	26	23	20
9	52	40	32	28	48	37	31	26	33	27	24	28	24	21	24	21	19
10	48	37	30	25	45	34	28	24	30	25	21	26	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2297	2297	2297
5°	2301	2261	2276
10°	2278	2217	2203
15°	2247	2145	2089
20°	2205	2044	1949
25°	2163	1931	1814
30°	2106	1815	1642
35°	2050	1691	1491
40°	1993	1562	1318
45°	1927	1419	1161
50°	1858	1275	1008
55°	1787	1120	860
60°	1704	959	709
65°	1609	795	639
70°	1494	641	579
75°	1349	566	528
80°	1139	477	461
85°	793	320	350

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1927 cd/sqm

TEST NUMBER: P915006

CATALOG NUMBER: DFN2DIP-SQ4F0-100D090US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	306.9	2.4
10°-20°	842.4	6.5
20°-30°	1182.6	9.1
30°-40°	1289.2	9.9
40°-50°	1184.9	9.1
50°-60°	930.5	7.1
60°-70°	605.7	4.6
70°-80°	311.8	2.4
80°-90°	86.0	0.7
90°-100°	139.5	1.1
100°-110°	443.3	3.4
110°-120°	758.7	5.8
120°-130°	997.8	7.6
130°-140°	1120.0	8.6
140°-150°	1098.2	8.4
150°-160°	921.3	7.1
160°-170°	611.0	4.7
170°-180°	213.5	1.6
0°-30°	2331.9	17.9
0°-40°	3621.0	27.8
0°-60°	5736.5	44.0
0°-90°	6739.9	51.7
90°-120°	1341.5	10.3
90°-150°	4557.5	34.9
90°-180°	6303.0	48.3
0°-180°	13043.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3274	3274	3274	3274	3274	
5°	3274	3259	3221	3247	3238	310
15°	3114	3081	2981	2924	2895	878
25°	2827	2732	2536	2415	2370	1300
35°	2436	2284	2024	1837	1772	1524
45°	1991	1792	1482	1271	1200	1538
55°	1514	1283	963	785	729	1353
65°	1022	782	516	415	406	1014
75°	545	338	237	216	213	577
85°	127	65	56	56	56	146
90°	2	24	67	62	65	13
95°	99	118	122	122	118	110
105°	409	415	419	422	422	432
115°	761	772	769	767	761	753
125°	1107	1124	1119	1113	1111	990
135°	1432	1453	1458	1455	1450	1107
145°	1739	1752	1763	1765	1758	1086
155°	1988	1994	2000	2009	2003	915
165°	2163	2161	2161	2175	2165	610
175°	2251	2245	2241	2255	2243	214
180°	2255	2255	2255	2255	2255	

TEST NUMBER: P915006

CATALOG NUMBER: DFN2DIP-SQ4F0-100D090US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3274.1	3274.1	3274.1	3274.1	3274.1
2.5°	3288.8	3274.1	3241.4	3271.2	3265.3
5°	3274.1	3259.3	3220.6	3247.4	3238.5
7.5°	3247.4	3229.7	3188.2	3199.9	3185.1
10°	3211.8	3191.1	3132.0	3122.9	3105.3
12.5°	3167.5	3140.8	3060.6	3043.0	3010.3
15°	3114.1	3081.3	2980.7	2924.5	2894.9
17.5°	3051.8	3004.3	2879.9	2814.8	2767.3
20°	2980.7	2921.3	2773.3	2699.4	2634.0
22.5°	2903.7	2835.5	2663.6	2563.0	2518.7
25°	2826.7	2731.8	2536.2	2414.9	2370.3
27.5°	2734.9	2634.0	2417.7	2278.5	2210.3
30°	2637.2	2524.3	2287.3	2136.4	2056.3
32.5°	2542.3	2405.8	2163.1	1985.2	1911.0
35°	2435.6	2284.5	2023.9	1837.1	1771.7
37.5°	2331.9	2168.8	1893.4	1688.8	1614.9
40°	2222.2	2044.6	1757.0	1546.7	1469.7
42.5°	2109.7	1920.1	1620.9	1401.4	1327.5
45°	1991.1	1792.5	1481.6	1271.0	1199.9
47.5°	1878.7	1668.3	1348.3	1137.7	1072.6
50°	1754.1	1543.8	1217.8	1013.2	951.3
52.5°	1632.4	1410.2	1093.4	897.8	841.5
55°	1513.9	1282.9	962.9	785.3	729.0
57.5°	1392.7	1155.6	847.6	681.5	634.1
60°	1268.1	1031.1	725.9	575.0	527.5
62.5°	1146.8	909.7	622.1	480.1	456.5
65°	1022.3	782.1	515.6	414.9	405.8
67.5°	903.8	663.6	414.9	364.3	355.5
70°	779.3	548.3	343.6	314.0	302.1
72.5°	660.8	441.3	287.3	263.7	257.8
75°	545.1	337.6	237.0	216.3	213.4
77.5°	429.8	239.9	186.7	174.8	168.8
80°	322.8	172.0	142.1	130.5	130.5
82.5°	225.1	115.7	97.8	91.8	91.8
85°	127.3	65.0	56.2	56.2	56.2
87.5°	47.5	23.6	23.6	20.8	20.8
90°	2.1	24.5	66.6	62.5	64.6
92.5°	42.1	57.1	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.2	182.8	190.4	190.4	190.4
100°	241.3	257.0	262.4	262.4	260.4
102.5°	321.5	333.1	340.6	342.6	340.6
105°	409.2	414.6	418.7	422.2	422.2
107.5°	496.2	504.4	504.4	505.7	496.2
110°	580.5	591.4	591.4	591.4	586.0

TEST NUMBER: P915006

CATALOG NUMBER: DFN2DIP-SQ4F0-100D090US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	671.6	683.2	681.1	675.7	671.6
115°	761.4	772.2	768.8	766.8	761.4
117.5°	850.4	865.4	855.9	850.4	844.9
120°	940.2	955.1	940.2	940.2	934.0
122.5°	1021.7	1040.8	1031.3	1025.8	1021.7
125°	1107.4	1124.3	1119.0	1112.8	1110.8
127.5°	1191.0	1212.0	1204.6	1196.4	1191.0
130°	1269.2	1293.6	1290.2	1286.1	1278.7
132.5°	1356.8	1375.9	1377.2	1367.7	1362.3
135°	1432.3	1453.3	1457.5	1455.4	1450.0
137.5°	1516.6	1533.6	1537.0	1535.6	1527.5
140°	1590.7	1607.7	1617.2	1617.2	1609.7
142.5°	1666.8	1683.8	1689.2	1691.3	1683.8
145°	1738.9	1752.5	1763.3	1765.4	1757.9
147.5°	1803.5	1820.4	1828.6	1832.0	1824.6
150°	1870.1	1881.7	1889.1	1895.2	1889.1
152.5°	1929.2	1940.8	1950.3	1957.8	1950.3
155°	1988.4	1993.8	1999.9	2009.4	2003.3
157.5°	2039.3	2043.4	2046.8	2060.4	2050.9
160°	2084.9	2089.0	2091.0	2102.5	2094.4
162.5°	2127.0	2127.0	2129.1	2142.0	2132.5
165°	2163.1	2161.0	2161.0	2174.6	2165.1
167.5°	2195.7	2189.6	2189.6	2203.1	2193.6
170°	2220.2	2214.7	2212.7	2226.3	2214.7
172.5°	2237.1	2231.7	2229.7	2243.3	2231.7
175°	2250.7	2245.3	2241.2	2254.9	2243.3
177.5°	2258.2	2252.8	2248.7	2260.3	2248.7
180°	2254.9	2254.9	2254.9	2254.9	2254.9

TEST NUMBER: P915006

CATALOG NUMBER: DFN2DIP-SQ4F0-100D090US927-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.20	11.05	11.15	12.01	13.26	6.16	7.01	7.11	7.97	9.22
	3H	11.89	12.64	12.85	13.61	14.88	7.35	8.11	8.31	9.08	10.35
	4H	12.50	13.21	13.47	14.19	15.47	7.81	8.52	8.78	9.49	10.77
	6H	12.92	13.58	13.91	14.56	15.85	8.13	8.78	9.11	9.76	11.06
	8H	13.05	13.68	14.05	14.67	15.97	8.22	8.84	9.21	9.84	11.13
	12H	13.12	13.71	14.11	14.70	16.02	8.26	8.86	9.26	9.85	11.16
4H	2H	10.22	10.94	11.20	11.91	13.19	6.76	7.48	7.74	8.45	9.73
	3H	12.06	12.65	13.05	13.66	14.95	8.12	8.71	9.11	9.71	11.01
	4H	12.75	13.30	13.75	14.29	15.61	8.66	9.21	9.66	10.20	11.52
	6H	13.27	13.74	14.28	14.76	16.08	9.09	9.55	10.10	10.57	11.89
	8H	13.45	13.89	14.46	14.90	16.23	9.22	9.65	10.23	10.66	11.99
	12H	13.55	13.94	14.58	14.97	16.31	9.28	9.67	10.31	10.70	12.04
8H	4H	12.72	13.16	13.73	14.17	15.50	8.95	9.38	9.96	10.40	11.73
	6H	13.30	13.65	14.33	14.71	16.04	9.47	9.83	10.50	10.88	12.21
	8H	13.51	13.83	14.56	14.87	16.22	9.66	9.98	10.70	11.02	12.37
	12H	13.66	13.93	14.70	14.97	16.36	9.78	10.06	10.83	11.09	12.49
12H	4H	12.68	13.07	13.71	14.10	15.43	8.95	9.35	9.98	10.38	11.71
	6H	13.27	13.59	14.31	14.63	15.98	9.52	9.84	10.56	10.88	12.22
	8H	13.49	13.77	14.54	14.81	16.20	9.73	10.01	10.78	11.05	12.44