

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915148

Luminaire Tested: DFN2DIP-SQ4F0-160D090US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915148
REPORT IS A COMBINATION OF REPORTS P900129 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-160D090US927-FLLFLL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18857.9 lumens
Efficiency: N/A
Efficacy: 80.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 233.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915148

CATALOG NUMBER: DFN2DIP-SQ4F0-160D090US927-FLLFLL

Luminous Intensity Polar Plot

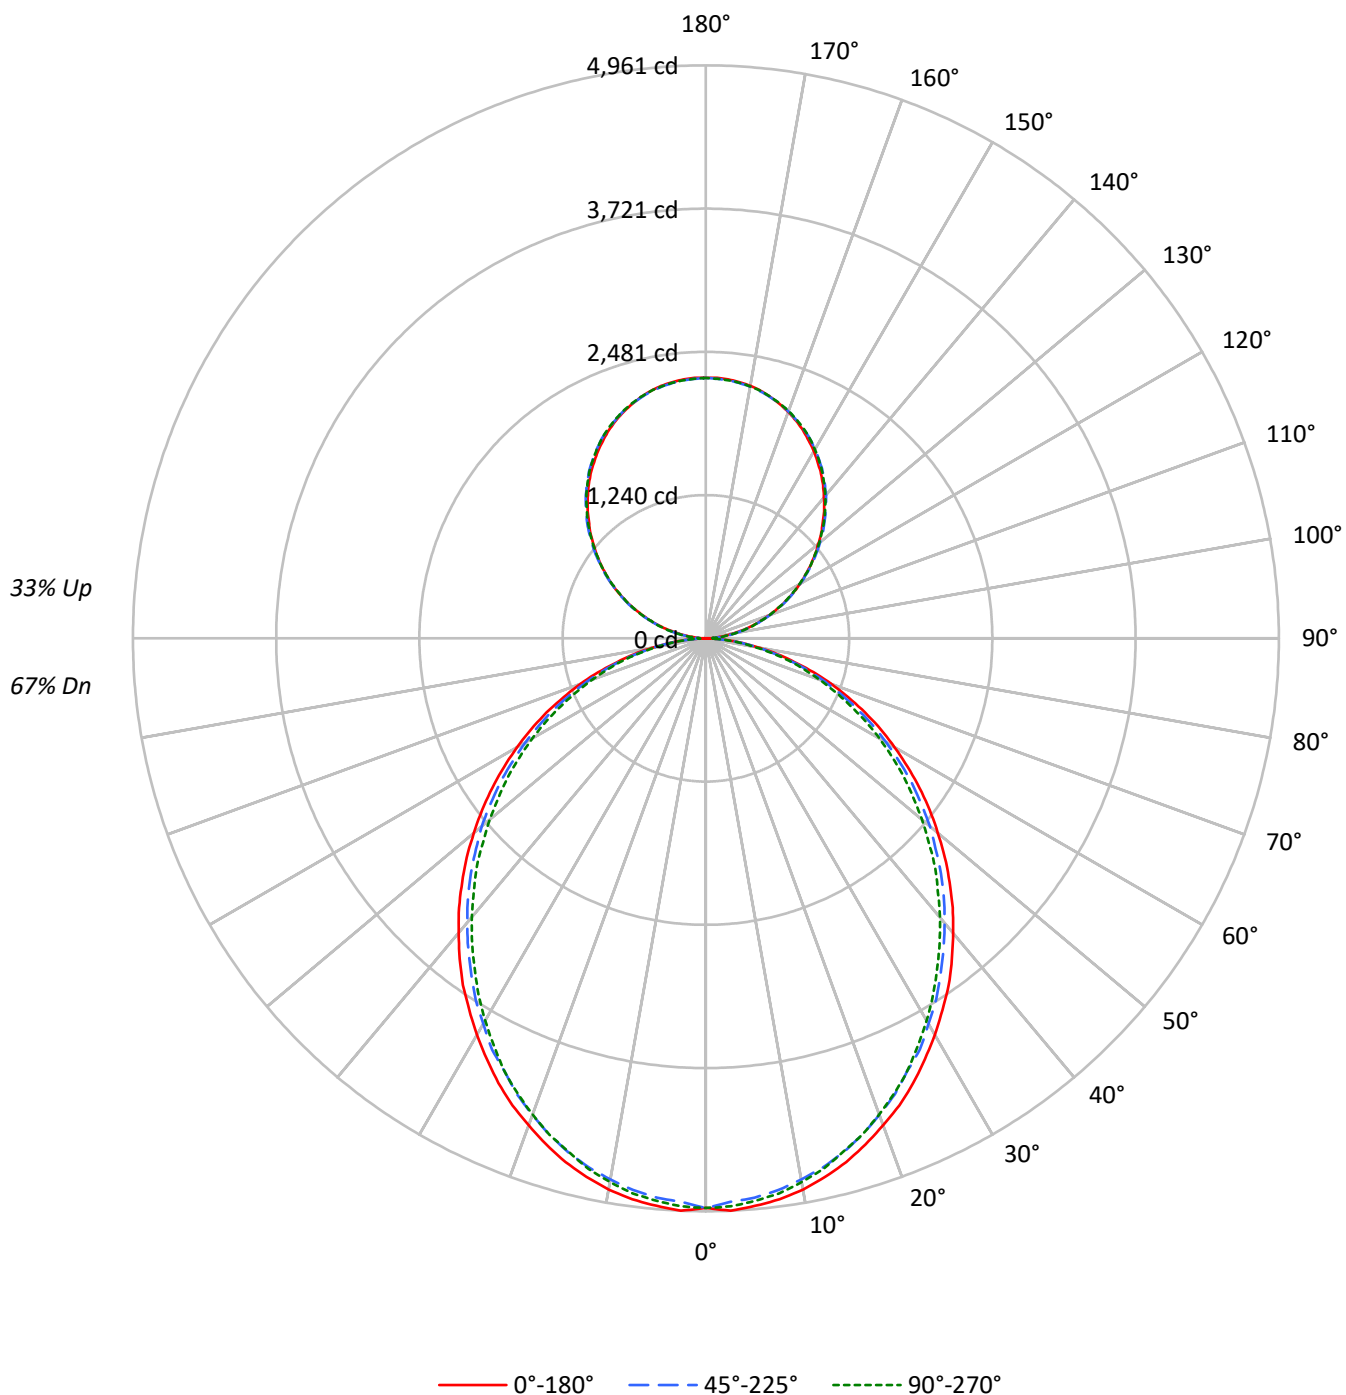

TEST NUMBER: P915148

CATALOG NUMBER: DFN2DIP-SQ4F0-160D090US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	81	81	81	71	71	71
1	102	97	93	89	95	92	88	85	81	79	76	72	70	68	63	62	60
2	92	85	78	73	87	80	74	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	61	50	43	37	45	39	34	41	35	31	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	49	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3461	3461	3461
5°	3466	3413	3436
10°	3438	3368	3391
15°	3387	3313	3319
20°	3319	3237	3246
25°	3251	3145	3160
30°	3166	3060	3052
35°	3085	2960	2937
40°	2986	2858	2828
45°	2887	2757	2717
50°	2778	2650	2587
55°	2665	2527	2469
60°	2536	2380	2333
65°	2397	2229	2172
70°	2218	2044	2000
75°	1972	1824	1843
80°	1674	1542	1540
85°	1210	1055	1035

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2887 cd/sqm

TEST NUMBER: P915148

CATALOG NUMBER: DFN2DIP-SQ4F0-160D090US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	464.2	2.5
10°-20°	1306.0	6.9
20°-30°	1919.4	10.2
30°-40°	2229.2	11.8
40°-50°	2226.5	11.8
50°-60°	1941.4	10.3
60°-70°	1435.1	7.6
70°-80°	812.0	4.3
80°-90°	220.7	1.2
90°-100°	139.5	0.7
100°-110°	443.3	2.4
110°-120°	758.7	4.0
120°-130°	997.8	5.3
130°-140°	1120.0	5.9
140°-150°	1098.2	5.8
150°-160°	921.3	4.9
160°-170°	611.0	3.2
170°-180°	213.5	1.1
0°-30°	3689.6	19.6
0°-40°	5918.9	31.4
0°-60°	10086.7	53.5
0°-90°	12554.5	66.6
90°-120°	1341.5	7.1
90°-150°	4557.5	24.2
90°-180°	6303.0	33.4
0°-180°	18857.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4932	4932	4932	4932	4932	
5°	4932	4913	4861	4899	4890	468
15°	4695	4667	4605	4624	4600	1322
25°	4249	4211	4131	4140	4131	1955
35°	3666	3619	3543	3514	3490	2289
45°	2983	2950	2878	2827	2808	2302
55°	2258	2229	2172	2115	2092	2018
65°	1522	1494	1446	1404	1380	1505
75°	796	787	763	735	745	850
85°	194	190	185	171	166	217
90°	2	24	67	62	65	18
95°	99	118	122	122	118	110
105°	409	415	419	422	422	432
115°	761	772	769	767	761	753
125°	1107	1124	1119	1113	1111	990
135°	1432	1453	1458	1455	1450	1107
145°	1739	1752	1763	1765	1758	1086
155°	1988	1994	2000	2009	2003	915
165°	2163	2161	2161	2175	2165	610
175°	2251	2245	2241	2255	2243	214
180°	2255	2255	2255	2255	2255	

TEST NUMBER: P915148

CATALOG NUMBER: DFN2DIP-SQ4F0-160D090US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4931.9	4931.9	4931.9	4931.9	4931.9
2.5°	4960.6	4936.9	4884.6	4931.9	4922.8
5°	4931.9	4913.3	4860.9	4898.7	4889.6
7.5°	4898.7	4870.5	4818.1	4856.4	4846.8
10°	4846.8	4813.6	4756.8	4794.5	4780.4
12.5°	4775.4	4747.2	4690.3	4714.0	4704.4
15°	4694.9	4666.7	4604.8	4624.0	4600.3
17.5°	4595.3	4567.1	4505.2	4528.8	4505.2
20°	4486.0	4457.9	4391.5	4405.6	4386.9
22.5°	4377.4	4334.7	4272.7	4272.7	4263.2
25°	4249.1	4211.4	4130.8	4139.9	4130.8
27.5°	4106.7	4073.5	4012.1	3998.1	3974.4
30°	3964.8	3926.6	3855.6	3841.5	3822.4
32.5°	3812.8	3784.7	3708.7	3680.0	3660.9
35°	3666.0	3618.7	3542.6	3514.0	3490.4
37.5°	3499.9	3457.2	3381.2	3347.9	3324.3
40°	3329.3	3291.1	3215.1	3172.8	3153.8
42.5°	3163.3	3125.1	3049.6	3001.8	2973.6
45°	2983.2	2949.9	2878.5	2826.7	2807.6
47.5°	2807.6	2774.4	2698.4	2646.0	2617.9
50°	2622.4	2598.8	2532.4	2465.9	2442.3
52.5°	2442.3	2409.1	2347.7	2295.3	2262.2
55°	2257.6	2229.0	2172.1	2115.2	2091.6
57.5°	2072.5	2048.8	1986.9	1930.1	1911.0
60°	1887.3	1868.7	1802.3	1749.9	1735.8
62.5°	1707.2	1674.0	1626.7	1579.4	1560.3
65°	1522.5	1493.8	1446.5	1403.8	1380.1
67.5°	1332.8	1308.7	1266.5	1233.2	1214.1
70°	1157.2	1138.1	1095.3	1062.2	1043.5
72.5°	977.1	958.0	934.4	901.1	887.1
75°	796.5	787.4	763.3	735.1	744.7
77.5°	635.5	616.4	606.8	592.7	578.6
80°	474.4	469.4	459.9	445.8	436.3
82.5°	322.5	322.5	318.0	298.9	298.9
85°	194.2	189.6	185.1	170.6	166.0
87.5°	85.6	76.0	66.4	52.4	47.3
90°	2.1	24.5	66.6	62.5	64.6
92.5°	42.1	57.1	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.2	182.8	190.4	190.4	190.4
100°	241.3	257.0	262.4	262.4	260.4
102.5°	321.5	333.1	340.6	342.6	340.6
105°	409.2	414.6	418.7	422.2	422.2
107.5°	496.2	504.4	504.4	505.7	496.2
110°	580.5	591.4	591.4	591.4	586.0

TEST NUMBER: P915148

CATALOG NUMBER: DFN2DIP-SQ4F0-160D090US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	671.6	683.2	681.1	675.7	671.6
115°	761.4	772.2	768.8	766.8	761.4
117.5°	850.4	865.4	855.9	850.4	844.9
120°	940.2	955.1	940.2	940.2	934.0
122.5°	1021.7	1040.8	1031.3	1025.8	1021.7
125°	1107.4	1124.3	1119.0	1112.8	1110.8
127.5°	1191.0	1212.0	1204.6	1196.4	1191.0
130°	1269.2	1293.6	1290.2	1286.1	1278.7
132.5°	1356.8	1375.9	1377.2	1367.7	1362.3
135°	1432.3	1453.3	1457.5	1455.4	1450.0
137.5°	1516.6	1533.6	1537.0	1535.6	1527.5
140°	1590.7	1607.7	1617.2	1617.2	1609.7
142.5°	1666.8	1683.8	1689.2	1691.3	1683.8
145°	1738.9	1752.5	1763.3	1765.4	1757.9
147.5°	1803.5	1820.4	1828.6	1832.0	1824.6
150°	1870.1	1881.7	1889.1	1895.2	1889.1
152.5°	1929.2	1940.8	1950.3	1957.8	1950.3
155°	1988.4	1993.8	1999.9	2009.4	2003.3
157.5°	2039.3	2043.4	2046.8	2060.4	2050.9
160°	2084.9	2089.0	2091.0	2102.5	2094.4
162.5°	2127.0	2127.0	2129.1	2142.0	2132.5
165°	2163.1	2161.0	2161.0	2174.6	2165.1
167.5°	2195.7	2189.6	2189.6	2203.1	2193.6
170°	2220.2	2214.7	2212.7	2226.3	2214.7
172.5°	2237.1	2231.7	2229.7	2243.3	2231.7
175°	2250.7	2245.3	2241.2	2254.9	2243.3
177.5°	2258.2	2252.8	2248.7	2260.3	2248.7
180°	2254.9	2254.9	2254.9	2254.9	2254.9

TEST NUMBER: P915148

CATALOG NUMBER: DFN2DIP-SQ4F0-160D090US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.00	14.03	13.80	14.86	15.87	12.56	13.59	13.36	14.41	15.43
	3H	14.68	15.61	15.49	16.44	17.48	14.19	15.12	15.00	15.95	16.99
	4H	15.28	16.15	16.11	16.99	18.05	14.78	15.66	15.61	16.50	17.55
	6H	15.69	16.50	16.53	17.35	18.41	15.19	16.00	16.03	16.85	17.91
	8H	15.80	16.57	16.65	17.44	18.50	15.30	16.07	16.15	16.94	18.00
	12H	15.86	16.59	16.71	17.45	18.54	15.35	16.08	16.20	16.94	18.03
4H	2H	13.48	14.36	14.32	15.20	16.25	13.13	14.00	13.96	14.85	15.90
	3H	15.37	16.10	16.22	16.97	18.04	14.96	15.69	15.81	16.57	17.64
	4H	16.09	16.76	16.95	17.63	18.73	15.67	16.34	16.53	17.21	18.30
	6H	16.62	17.20	17.50	18.09	19.19	16.19	16.77	17.07	17.66	18.76
	8H	16.78	17.32	17.66	18.21	19.32	16.34	16.88	17.22	17.77	18.88
	12H	16.86	17.35	17.76	18.26	19.37	16.41	16.90	17.31	17.81	18.93
8H	4H	16.30	16.84	17.18	17.73	18.84	15.93	16.47	16.81	17.36	18.47
	6H	16.95	17.39	17.85	18.33	19.44	16.56	17.01	17.47	17.94	19.05
	8H	17.17	17.57	18.09	18.49	19.62	16.78	17.18	17.70	18.10	19.23
	12H	17.32	17.66	18.23	18.58	19.76	16.90	17.25	17.82	18.17	19.35
12H	4H	16.30	16.78	17.20	17.69	18.81	15.93	16.42	16.83	17.33	18.44
	6H	16.98	17.38	17.90	18.30	19.43	16.61	17.00	17.52	17.93	19.06
	8H	17.23	17.58	18.15	18.50	19.68	16.85	17.20	17.77	18.12	19.30

END OF REPORT