

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917623

Luminaire Tested: DFN2DIP-SQ4F0-070D080US930-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P917623  
REPORT IS A COMBINATION OF REPORTS P901618 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-070D080US930-RLLONL  
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11308.2 lumens  
Efficiency: N/A  
Efficacy: 93.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 120.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9967  
Total Harmonic Distortion (THDi): 0.063  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P917623  
CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US930-RLLONL

### Luminous Intensity Polar Plot

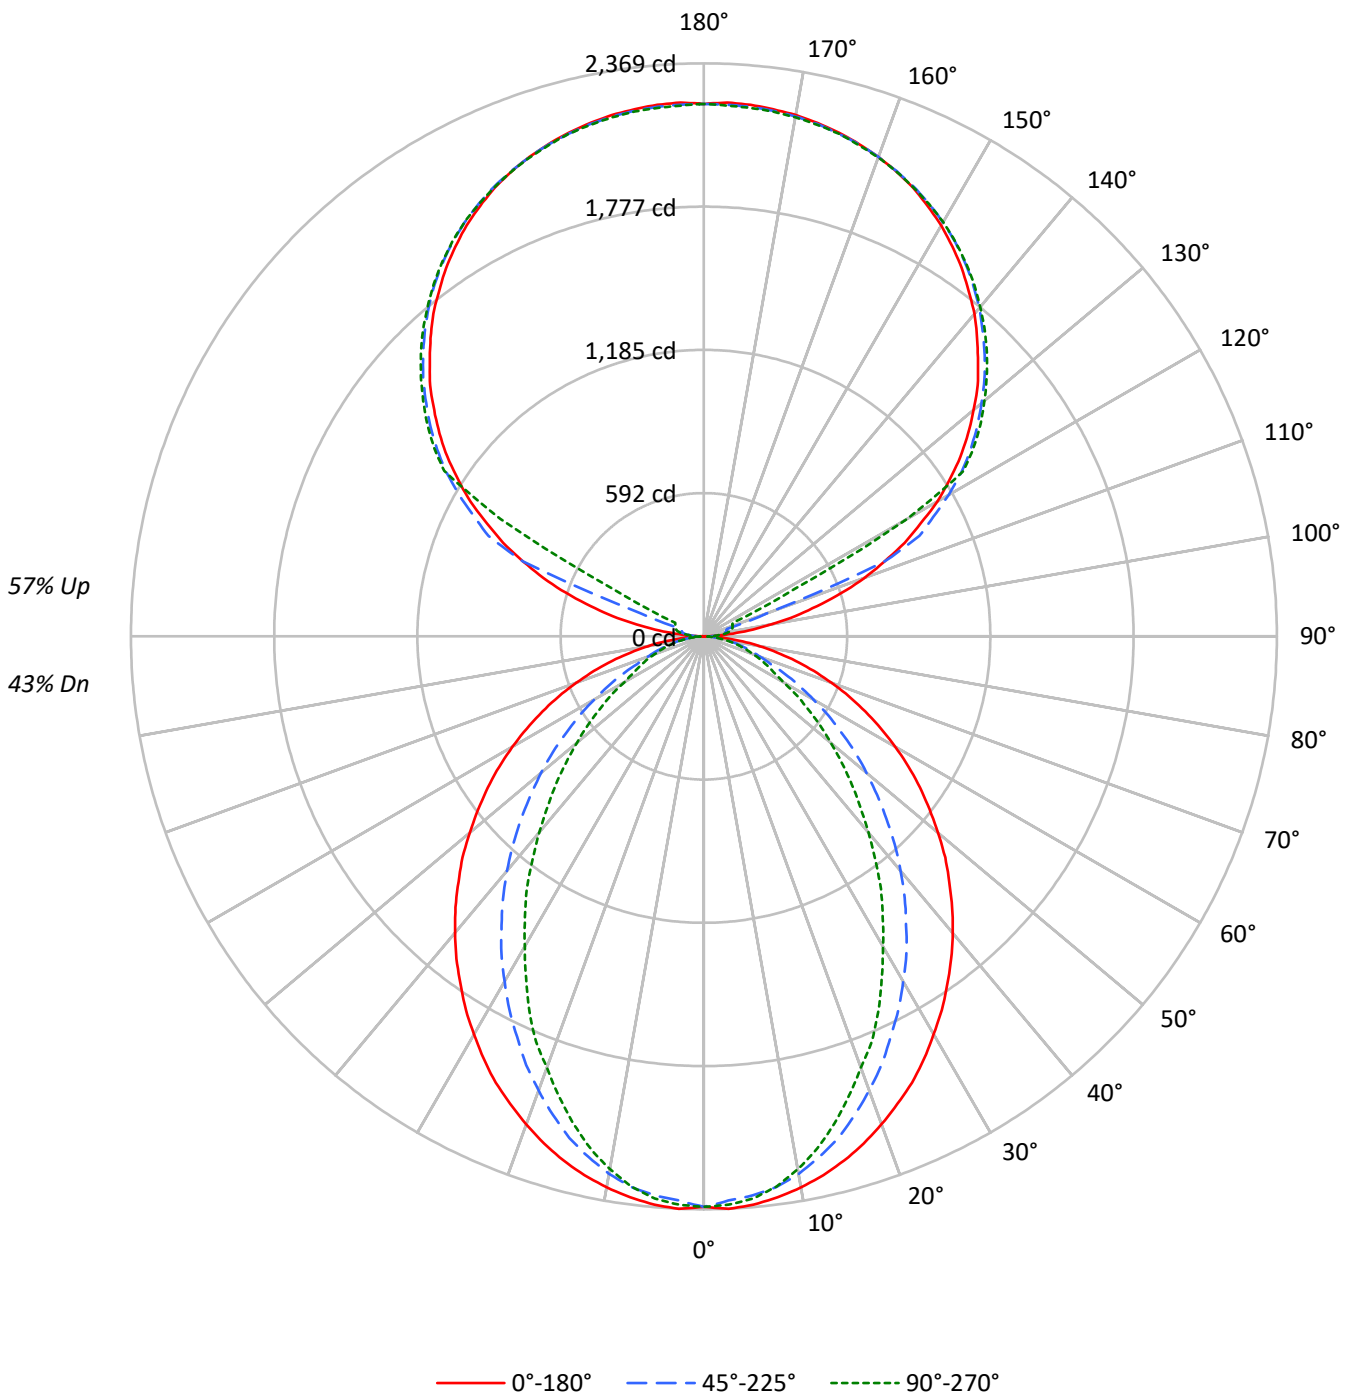



TEST NUMBER: P917623

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US930-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43				43
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	44	43	37				37
2	88	81	75	70	81	75	70	65	62	58	55	50	48	46	40	38	37	32				32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	33	32	27				27
4	74	64	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28	24				24
5	68	57	49	43	62	53	46	41	44	39	35	36	33	30	29	26	24	21				21
6	63	51	43	38	57	47	40	35	40	35	31	33	29	26	26	24	22	19				19
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19	17				17
8	54	42	35	29	49	39	32	28	33	28	24	28	24	21	22	20	17	15				15
9	50	38	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16	14				14
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	16	14	12				12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1655	1655	1655
5°	1658	1629	1640
10°	1641	1597	1587
15°	1619	1545	1505
20°	1589	1473	1404
25°	1558	1391	1306
30°	1517	1308	1183
35°	1477	1218	1074
40°	1436	1125	949
45°	1388	1022	837
50°	1339	918	726
55°	1287	807	620
60°	1228	691	511
65°	1159	572	460
70°	1076	462	417
75°	972	408	381
80°	821	343	332
85°	571	231	252

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1388 cd/sqm



TEST NUMBER: P917623

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US930-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	221.1	2.0
10°-20°	606.9	5.4
20°-30°	852.0	7.5
30°-40°	928.8	8.2
40°-50°	853.6	7.5
50°-60°	670.4	5.9
60°-70°	436.4	3.9
70°-80°	224.6	2.0
80°-90°	61.2	0.5
90°-100°	72.6	0.6
100°-110°	270.6	2.4
110°-120°	717.6	6.3
120°-130°	1190.2	10.5
130°-140°	1264.3	11.2
140°-150°	1175.0	10.4
150°-160°	944.7	8.4
160°-170°	608.7	5.4
170°-180°	209.5	1.9
0°-30°	1679.9	14.9
0°-40°	2608.7	23.1
0°-60°	4132.7	36.5
0°-90°	4854.9	42.9
90°-120°	1060.8	9.4
90°-150°	4690.4	41.5
90°-180°	6453.0	57.1
0°-180°	11308.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2359	2359	2359	2359	2359	
5°	2359	2348	2320	2340	2333	224
15°	2244	2220	2147	2107	2086	632
25°	2036	1968	1827	1740	1708	937
35°	1755	1646	1458	1324	1276	1098
45°	1434	1291	1067	916	864	1108
55°	1091	924	694	566	525	975
65°	736	564	371	299	292	730
75°	393	243	171	156	154	415
85°	92	47	40	40	40	105
90°	2	19	32	40	43	11
95°	104	51	62	70	68	123
105°	484	532	97	115	121	517
115°	916	943	983	245	131	902
125°	1295	1316	1346	1357	1362	1155
135°	1602	1628	1642	1658	1655	1238
145°	1859	1857	1884	1895	1887	1163
155°	2047	2032	2052	2061	2048	943
165°	2157	2147	2152	2163	2152	609
175°	2206	2195	2198	2209	2193	210
180°	2201	2201	2201	2201	2201	



TEST NUMBER: P917623

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US930-RLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2358.7	2358.7	2358.7	2358.7	2358.7
2.5°	2369.3	2358.7	2335.2	2356.7	2352.4
5°	2358.7	2348.1	2320.3	2339.5	2333.1
7.5°	2339.5	2326.8	2296.9	2305.3	2294.7
10°	2313.9	2299.0	2256.3	2249.8	2237.1
12.5°	2281.9	2262.7	2205.0	2192.3	2168.7
15°	2243.5	2219.9	2147.4	2106.9	2085.6
17.5°	2198.6	2164.5	2074.8	2027.8	1993.6
20°	2147.4	2104.6	1998.0	1944.7	1897.6
22.5°	2092.0	2042.8	1918.9	1846.4	1814.5
25°	2036.5	1968.0	1827.2	1739.8	1707.6
27.5°	1970.3	1897.6	1741.8	1641.5	1592.4
30°	1899.9	1818.6	1647.8	1539.1	1481.4
32.5°	1831.5	1733.2	1558.4	1430.2	1376.7
35°	1754.7	1645.8	1458.1	1323.6	1276.4
37.5°	1680.0	1562.4	1364.1	1216.6	1163.4
40°	1600.9	1473.0	1265.8	1114.3	1058.7
42.5°	1519.9	1383.3	1167.7	1009.6	956.4
45°	1434.5	1291.4	1067.4	915.7	864.5
47.5°	1353.4	1201.9	971.3	819.6	772.7
50°	1263.7	1112.2	877.3	729.9	685.3
52.5°	1176.1	1015.9	787.7	646.8	606.3
55°	1090.7	924.2	693.7	565.7	525.2
57.5°	1003.3	832.5	610.6	491.0	456.8
60°	913.6	742.8	522.9	414.3	380.0
62.5°	826.1	655.4	448.2	345.8	328.8
65°	736.5	563.5	371.4	299.0	292.4
67.5°	651.1	478.1	299.0	262.4	256.2
70°	561.4	394.9	247.5	226.2	217.6
72.5°	476.1	318.0	207.0	190.0	185.7
75°	392.7	243.2	170.7	155.8	153.8
77.5°	309.6	172.8	134.5	125.9	121.6
80°	232.6	123.8	102.4	94.0	94.0
82.5°	162.2	83.3	70.4	66.1	66.1
85°	91.7	46.9	40.5	40.5	40.5
87.5°	34.2	17.0	17.0	14.9	14.9
90°	1.5	19.1	31.8	39.9	43.0
92.5°	39.9	33.5	38.2	41.4	43.0
95°	103.5	50.9	62.0	70.2	68.5
97.5°	186.3	55.8	81.1	86.1	87.6
100°	282.0	63.8	90.8	103.5	106.6
102.5°	387.0	383.9	94.0	111.4	116.3
105°	484.2	532.1	97.2	114.6	121.1
107.5°	597.3	637.0	100.4	117.8	124.3
110°	705.7	739.0	278.8	119.5	125.8



TEST NUMBER: P917623

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US930-RLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	807.6	836.2	809.2	122.5	127.5
115°	915.8	942.9	982.8	245.3	130.7
117.5°	1009.8	1041.6	1068.9	840.9	423.7
120°	1115.0	1138.8	1167.6	1186.7	971.6
122.5°	1204.0	1229.6	1261.6	1271.0	1272.8
125°	1294.9	1315.6	1345.9	1357.1	1361.8
127.5°	1377.7	1400.0	1424.1	1439.9	1441.4
130°	1455.8	1481.3	1498.8	1516.4	1514.8
132.5°	1535.5	1556.2	1573.7	1588.0	1586.5
135°	1602.4	1627.9	1642.1	1658.2	1655.0
137.5°	1672.4	1691.5	1707.6	1723.5	1718.7
140°	1740.8	1753.7	1771.2	1785.5	1777.5
142.5°	1798.4	1809.5	1830.1	1842.8	1834.8
145°	1858.9	1857.2	1884.2	1895.4	1887.4
147.5°	1911.3	1906.6	1933.6	1941.6	1935.3
150°	1962.3	1951.2	1976.7	1986.1	1978.2
152.5°	2005.3	1992.6	2016.4	2026.1	2014.9
155°	2046.7	2032.5	2051.6	2061.1	2048.4
157.5°	2080.2	2067.5	2081.9	2093.0	2080.2
160°	2108.9	2099.3	2108.9	2118.4	2107.2
162.5°	2134.3	2124.8	2132.7	2143.9	2129.6
165°	2156.6	2147.2	2151.9	2163.0	2151.9
167.5°	2174.2	2164.5	2169.4	2180.6	2166.2
170°	2188.6	2178.9	2182.1	2193.3	2178.9
172.5°	2198.0	2188.6	2191.8	2202.9	2188.6
175°	2206.0	2194.8	2198.0	2209.1	2193.3
177.5°	2209.1	2198.0	2199.7	2210.8	2196.5
180°	2201.2	2201.2	2201.2	2201.2	2201.2



TEST NUMBER: P917623  
 CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US930-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.21	8.99	9.23	10.01	11.39	4.17	4.95	5.20	5.97	7.35
	3H	9.89	10.58	10.92	11.62	13.01	5.36	6.05	6.39	7.09	8.48
	4H	10.50	11.16	11.54	12.19	13.59	5.81	6.46	6.85	7.50	8.90
	6H	10.92	11.53	11.98	12.57	13.98	6.13	6.73	7.18	7.77	9.18
	8H	11.05	11.62	12.11	12.68	14.09	6.21	6.79	7.27	7.85	9.25
	12H	11.11	11.66	12.17	12.71	14.14	6.26	6.80	7.32	7.85	9.28
4H	2H	8.22	8.88	9.27	9.92	11.32	4.76	5.42	5.82	6.46	7.86
	3H	10.05	10.60	11.11	11.66	13.08	6.11	6.66	7.17	7.72	9.13
	4H	10.75	11.25	11.81	12.30	13.74	6.66	7.16	7.72	8.21	9.65
	6H	11.26	11.69	12.34	12.77	14.20	7.07	7.50	8.15	8.58	10.01
	8H	11.44	11.84	12.51	12.91	14.36	7.20	7.60	8.28	8.67	10.12
	12H	11.53	11.90	12.63	12.98	14.43	7.27	7.63	8.36	8.71	10.16
8H	4H	10.71	11.11	11.78	12.18	13.63	6.94	7.34	8.01	8.41	9.85
	6H	11.28	11.61	12.38	12.72	14.16	7.45	7.78	8.55	8.90	10.34
	8H	11.50	11.79	12.60	12.88	14.35	7.65	7.93	8.75	9.03	10.49
	12H	11.64	11.89	12.74	12.98	14.48	7.76	8.02	8.87	9.11	10.61
12H	4H	10.66	11.02	11.75	12.11	13.56	6.94	7.30	8.03	8.39	9.83
	6H	11.25	11.54	12.36	12.64	14.10	7.50	7.79	8.61	8.89	10.35
	8H	11.48	11.73	12.58	12.82	14.32	7.71	7.97	8.82	9.06	10.56