

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917625

Luminaire Tested: DFN2DIP-SQ4F0-070D090US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917625
REPORT IS A COMBINATION OF REPORTS P901635 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-070D090US930-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12914.3 lumens
Efficiency: N/A
Efficacy: 100.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 128
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917625

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US930-FLLONL

Luminous Intensity Polar Plot

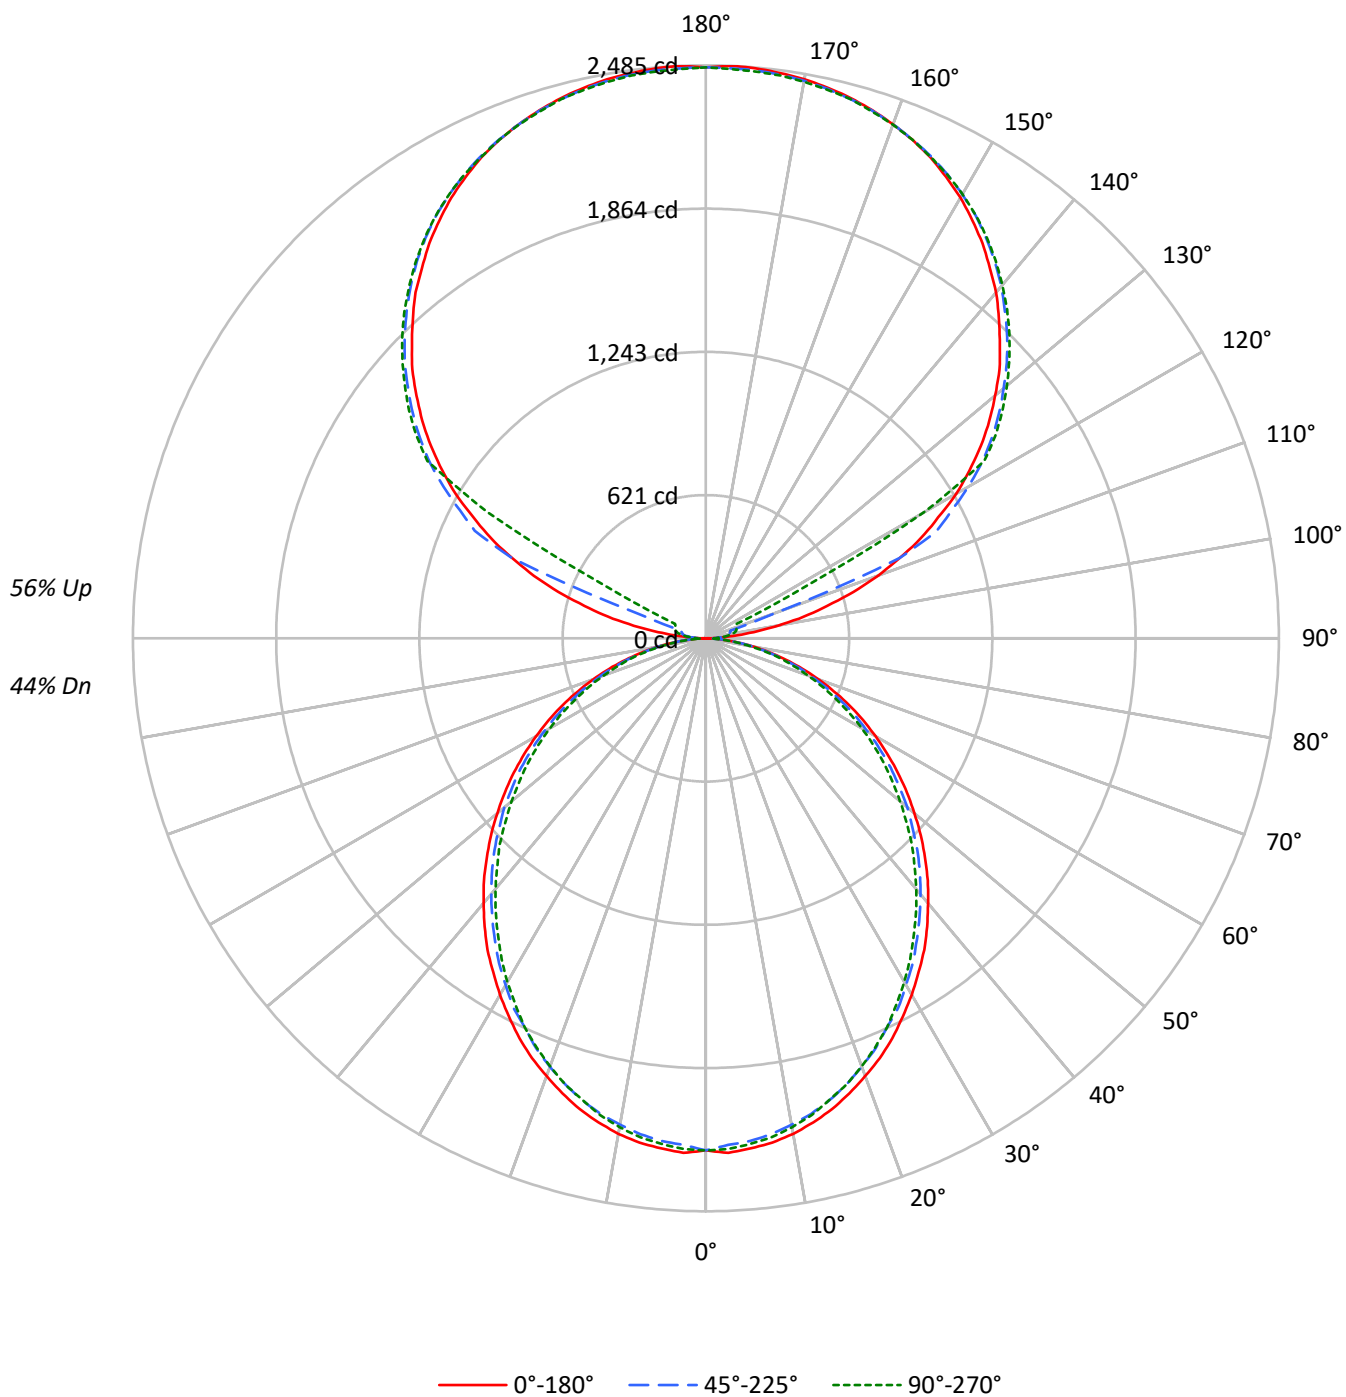

TEST NUMBER: P917625

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US930-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50
1	96	92	88	85	88	84	81	78	70	68	66	57	55	54	45	44	43
2	88	80	74	69	80	74	69	64	61	58	54	50	47	45	39	37	36
3	80	71	63	58	73	65	59	54	54	49	46	44	41	38	35	32	31
4	73	63	55	49	67	58	51	45	48	43	39	39	35	32	31	28	26
5	67	56	48	42	61	51	44	39	43	38	33	35	31	28	28	25	23
6	62	50	42	36	56	46	39	34	39	33	29	32	28	25	25	22	20
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	20	17	14
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1558	1558	1558
5°	1561	1537	1547
10°	1548	1516	1527
15°	1525	1492	1494
20°	1494	1457	1461
25°	1464	1416	1423
30°	1425	1378	1374
35°	1389	1333	1323
40°	1344	1287	1273
45°	1300	1241	1223
50°	1251	1193	1165
55°	1200	1138	1112
60°	1142	1072	1050
65°	1079	1004	978
70°	999	921	901
75°	888	821	830
80°	754	695	693
85°	545	475	466

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1327 cd/sqm

TEST NUMBER: P917625

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US930-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.0	1.6
10°-20°	588.1	4.6
20°-30°	864.2	6.7
30°-40°	1003.7	7.8
40°-50°	1002.5	7.8
50°-60°	874.2	6.8
60°-70°	646.2	5.0
70°-80°	365.6	2.8
80°-90°	100.9	0.8
90°-100°	81.7	0.6
100°-110°	304.4	2.4
110°-120°	807.3	6.3
120°-130°	1339.0	10.4
130°-140°	1422.3	11.0
140°-150°	1321.9	10.2
150°-160°	1062.8	8.2
160°-170°	684.8	5.3
170°-180°	235.7	1.8
0°-30°	1661.3	12.9
0°-40°	2665.1	20.6
0°-60°	4541.7	35.2
0°-90°	5654.4	43.8
90°-120°	1193.4	9.2
90°-150°	5276.6	40.9
90°-180°	7260.0	56.2
0°-180°	12914.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2221	2221	2221	2221	2221	
5°	2221	2212	2189	2206	2202	211
15°	2114	2101	2073	2082	2071	595
25°	1913	1896	1860	1864	1860	880
35°	1651	1629	1595	1582	1572	1031
45°	1343	1328	1296	1273	1264	1037
55°	1016	1004	978	952	942	909
65°	686	673	651	632	621	678
75°	359	355	344	331	335	383
85°	88	85	83	77	75	98
90°	2	22	36	45	48	12
95°	116	57	70	79	77	138
105°	545	599	109	129	136	582
115°	1030	1061	1106	276	147	1014
125°	1457	1480	1514	1527	1532	1299
135°	1803	1831	1847	1866	1862	1393
145°	2091	2089	2120	2132	2123	1308
155°	2303	2287	2308	2319	2304	1061
165°	2426	2416	2421	2433	2421	685
175°	2482	2469	2473	2485	2467	236
180°	2476	2476	2476	2476	2476	

TEST NUMBER: P917625

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2220.6	2220.6	2220.6	2220.6	2220.6
2.5°	2233.6	2222.9	2199.3	2220.6	2216.6
5°	2220.6	2212.3	2188.7	2205.7	2201.6
7.5°	2205.7	2193.0	2169.4	2186.7	2182.4
10°	2182.4	2167.4	2141.8	2158.8	2152.5
12.5°	2150.2	2137.5	2111.9	2122.5	2118.2
15°	2114.0	2101.3	2073.4	2082.0	2071.3
17.5°	2069.1	2056.4	2028.5	2039.2	2028.5
20°	2019.9	2007.3	1977.3	1983.7	1975.3
22.5°	1971.0	1951.7	1923.9	1923.9	1919.5
25°	1913.3	1896.2	1860.0	1864.1	1860.0
27.5°	1849.1	1834.2	1806.5	1800.2	1789.5
30°	1785.3	1768.0	1736.1	1729.7	1721.1
32.5°	1716.8	1704.1	1669.9	1657.0	1648.4
35°	1650.7	1629.4	1595.1	1582.2	1571.6
37.5°	1575.9	1556.6	1522.4	1507.5	1496.8
40°	1499.1	1481.9	1447.6	1428.6	1420.0
42.5°	1424.3	1407.1	1373.1	1351.6	1338.9
45°	1343.2	1328.3	1296.1	1272.8	1264.1
47.5°	1264.1	1249.2	1215.0	1191.4	1178.8
50°	1180.8	1170.1	1140.2	1110.4	1099.7
52.5°	1099.7	1084.8	1057.1	1033.6	1018.6
55°	1016.5	1003.6	978.0	952.4	941.8
57.5°	933.2	922.5	894.6	869.0	860.5
60°	849.8	841.4	811.5	788.0	781.6
62.5°	768.7	753.7	732.5	711.2	702.5
65°	685.6	672.6	651.3	632.1	621.4
67.5°	600.1	589.3	570.2	555.3	546.7
70°	521.1	512.5	493.2	478.3	469.9
72.5°	439.9	431.4	420.7	405.8	399.4
75°	358.6	354.6	343.6	331.0	335.3
77.5°	286.2	277.5	273.2	266.8	260.6
80°	213.6	211.4	207.1	200.7	196.4
82.5°	145.2	145.2	143.2	134.6	134.6
85°	87.5	85.4	83.4	76.8	74.8
87.5°	38.5	34.2	29.9	23.6	21.3
90°	1.7	21.5	35.7	44.9	48.3
92.5°	44.9	37.7	43.0	46.6	48.3
95°	116.4	57.2	69.8	78.9	77.0
97.5°	209.6	62.8	91.3	96.8	98.5
100°	317.2	71.7	102.2	116.4	120.0
102.5°	435.4	431.9	105.7	125.3	130.9
105°	544.7	598.6	109.3	129.0	136.2
107.5°	672.0	716.6	113.0	132.6	139.8
110°	793.9	831.4	313.6	134.4	141.5

TEST NUMBER: P917625

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	908.6	940.7	910.3	137.9	143.4
115°	1030.3	1060.7	1105.6	276.0	147.0
117.5°	1136.0	1171.8	1202.4	946.1	476.6
120°	1254.3	1281.2	1313.5	1335.0	1093.1
122.5°	1354.6	1383.3	1419.3	1429.9	1431.8
125°	1456.7	1480.1	1514.2	1526.7	1532.0
127.5°	1549.9	1575.0	1602.1	1619.9	1621.6
130°	1637.8	1666.6	1686.1	1705.8	1704.2
132.5°	1727.4	1750.8	1770.3	1786.6	1784.9
135°	1802.7	1831.4	1847.4	1865.5	1861.9
137.5°	1881.5	1902.9	1921.0	1938.9	1933.6
140°	1958.4	1972.9	1992.5	2008.7	1999.8
142.5°	2023.2	2035.7	2058.9	2073.1	2064.3
145°	2091.2	2089.3	2119.8	2132.3	2123.4
147.5°	2150.2	2144.9	2175.3	2184.3	2177.2
150°	2207.7	2195.1	2223.8	2234.4	2225.5
152.5°	2255.9	2241.7	2268.5	2279.3	2266.8
155°	2302.6	2286.6	2308.0	2318.7	2304.4
157.5°	2340.2	2326.0	2342.1	2354.7	2340.2
160°	2372.5	2361.7	2372.5	2383.2	2370.6
162.5°	2401.1	2390.4	2399.3	2411.9	2395.8
165°	2426.2	2415.5	2420.9	2433.4	2420.9
167.5°	2446.0	2435.1	2440.6	2453.2	2437.0
170°	2462.1	2451.3	2454.9	2467.4	2451.3
172.5°	2472.8	2462.1	2465.7	2478.3	2462.1
175°	2481.7	2469.1	2472.8	2485.3	2467.4
177.5°	2485.3	2472.8	2474.7	2487.2	2471.1
180°	2476.4	2476.4	2476.4	2476.4	2476.4

TEST NUMBER: P917625

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US930-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.22	9.03	9.23	10.05	11.41	7.78	8.59	8.79	9.60	10.96
	3H	9.88	10.61	10.90	11.63	13.01	9.39	10.12	10.41	11.14	12.52
	4H	10.47	11.16	11.50	12.19	13.57	9.98	10.66	11.01	11.69	13.08
	6H	10.87	11.50	11.91	12.54	13.94	10.37	11.00	11.41	12.04	13.44
	8H	10.98	11.58	12.02	12.63	14.02	10.47	11.08	11.52	12.13	13.52
	12H	11.03	11.60	12.08	12.64	14.06	10.52	11.09	11.57	12.13	13.55
4H	2H	8.68	9.36	9.72	10.39	11.78	8.32	9.01	9.36	10.04	11.42
	3H	10.54	11.12	11.59	12.17	13.57	10.14	10.71	11.18	11.77	13.17
	4H	11.26	11.78	12.31	12.83	14.25	10.83	11.36	11.89	12.41	13.83
	6H	11.77	12.23	12.84	13.30	14.71	11.34	11.79	12.41	12.87	14.28
	8H	11.93	12.35	12.99	13.41	14.84	11.49	11.91	12.55	12.98	14.41
	12H	12.00	12.38	13.08	13.46	14.90	11.55	11.93	12.63	13.01	14.45
8H	4H	11.45	11.87	12.51	12.94	14.37	11.07	11.50	12.14	12.56	13.99
	6H	12.09	12.43	13.17	13.54	14.97	11.70	12.05	12.79	13.16	14.59
	8H	12.31	12.61	13.40	13.70	15.15	11.92	12.22	13.01	13.31	14.76
	12H	12.44	12.71	13.54	13.80	15.28	12.03	12.30	13.13	13.38	14.87
12H	4H	11.43	11.82	12.52	12.90	14.33	11.07	11.45	12.15	12.53	13.96
	6H	12.11	12.42	13.21	13.51	14.96	11.74	12.05	12.84	13.14	14.59
	8H	12.36	12.63	13.45	13.71	15.20	11.98	12.25	13.07	13.33	14.82