

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917825

Luminaire Tested: DFN2DIP-SQ4F0-120D160US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917825
REPORT IS A COMBINATION OF REPORTS P901735 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-120D160US930-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 22600.1 lumens
Efficiency: N/A
Efficacy: 94.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 239.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917825

CATALOG NUMBER: DFN2DIP-SQ4F0-120D160US930-FLLONL

Luminous Intensity Polar Plot

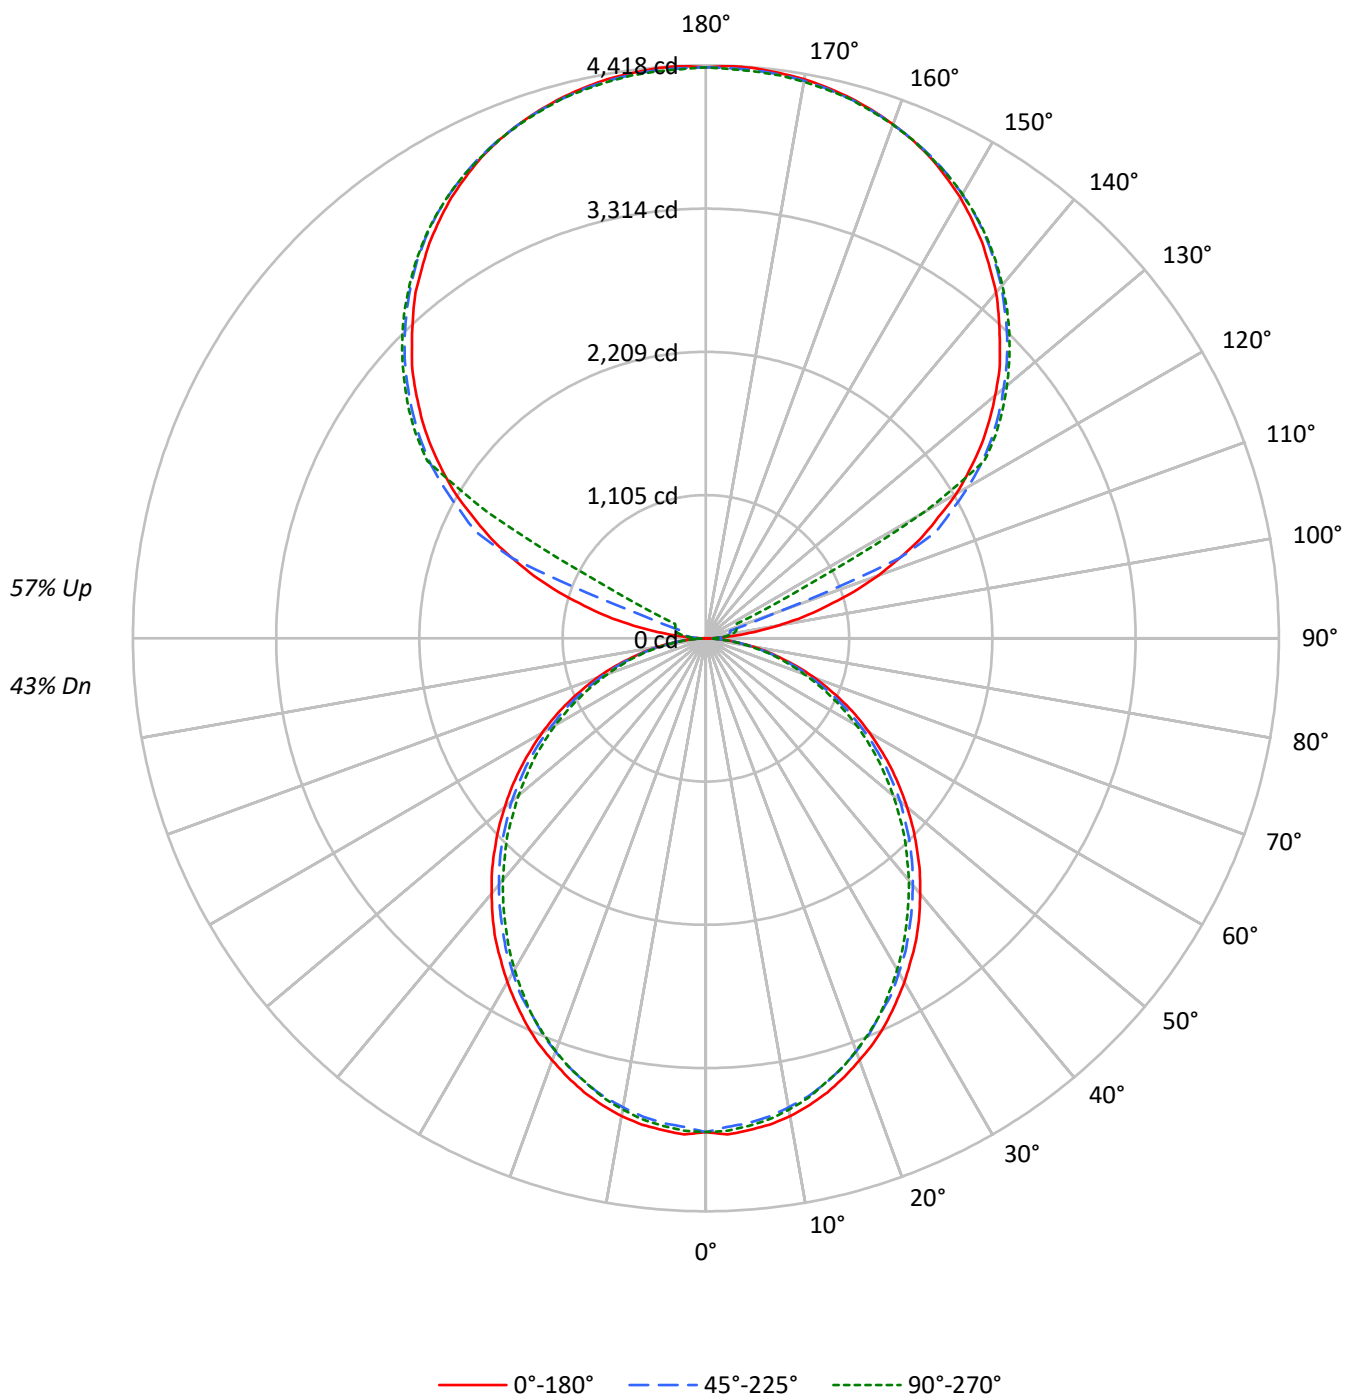

TEST NUMBER: P917825

CATALOG NUMBER: DFN2DIP-SQ4F0-120D160US930-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42
2	88	80	74	69	80	74	68	64	61	57	54	49	47	44	39	37	35
3	80	71	63	58	73	65	58	53	54	49	45	44	40	38	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	31	28	26
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	28	25	23
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	32	52	41	34	29	35	29	25	29	25	22	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2671	2671	2671
5°	2675	2634	2652
10°	2654	2600	2617
15°	2615	2557	2562
20°	2562	2498	2505
25°	2509	2428	2440
30°	2444	2362	2356
35°	2381	2285	2267
40°	2305	2206	2183
45°	2228	2128	2097
50°	2144	2046	1997
55°	2057	1950	1906
60°	1958	1837	1801
65°	1850	1721	1677
70°	1712	1578	1544
75°	1522	1407	1423
80°	1293	1191	1188
85°	934	814	799

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2361 cd/sqm

TEST NUMBER: P917825

CATALOG NUMBER: DFN2DIP-SQ4F0-120D160US930-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	358.3	1.6
10°-20°	1008.1	4.5
20°-30°	1481.5	6.6
30°-40°	1720.7	7.6
40°-50°	1718.6	7.6
50°-60°	1498.5	6.6
60°-70°	1107.8	4.9
70°-80°	626.7	2.8
80°-90°	173.2	0.8
90°-100°	145.1	0.6
100°-110°	541.2	2.4
110°-120°	1435.3	6.4
120°-130°	2380.5	10.5
130°-140°	2528.6	11.2
140°-150°	2350.1	10.4
150°-160°	1889.4	8.4
160°-170°	1217.5	5.4
170°-180°	419.0	1.9
0°-30°	2848.0	12.6
0°-40°	4568.7	20.2
0°-60°	7785.8	34.5
0°-90°	9693.5	42.9
90°-120°	2121.6	9.4
90°-150°	9380.7	41.5
90°-180°	12907.0	57.1
0°-180°	22600.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3807	3807	3807	3807	3807	
5°	3807	3792	3752	3781	3774	361
15°	3624	3602	3554	3569	3551	1021
25°	3280	3251	3188	3196	3188	1509
35°	2830	2793	2734	2712	2694	1767
45°	2303	2277	2222	2182	2167	1777
55°	1743	1720	1677	1633	1614	1558
65°	1175	1153	1117	1084	1065	1162
75°	615	608	589	567	575	656
85°	150	146	143	132	128	167
90°	3	38	64	80	86	21
95°	207	102	124	140	137	245
105°	968	1064	194	229	242	1035
115°	1832	1886	1966	491	261	1803
125°	2590	2631	2692	2714	2724	2310
135°	3205	3256	3284	3316	3310	2476
145°	3718	3714	3768	3791	3775	2325
155°	4093	4065	4103	4122	4097	1886
165°	4313	4294	4304	4326	4304	1219
175°	4412	4390	4396	4418	4386	420
180°	4402	4402	4402	4402	4402	

TEST NUMBER: P917825

CATALOG NUMBER: DFN2DIP-SQ4F0-120D160US930-FLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3806.9	3806.9	3806.9	3806.9	3806.9
2.5°	3829.0	3810.7	3770.3	3806.9	3799.9
5°	3806.9	3792.4	3752.1	3781.2	3774.2
7.5°	3781.2	3759.4	3719.1	3748.6	3741.2
10°	3741.2	3715.6	3671.7	3700.8	3690.0
12.5°	3686.0	3664.3	3620.4	3638.7	3631.3
15°	3623.9	3602.2	3554.4	3569.1	3550.9
17.5°	3547.0	3525.3	3477.5	3495.8	3477.5
20°	3462.7	3441.0	3389.8	3400.6	3386.3
22.5°	3378.8	3345.8	3298.0	3298.0	3290.7
25°	3279.8	3250.7	3188.5	3195.6	3188.5
27.5°	3169.9	3144.3	3096.9	3086.0	3067.8
30°	3060.4	3030.9	2976.1	2965.2	2950.5
32.5°	2943.1	2921.4	2862.7	2840.6	2825.8
35°	2829.7	2793.2	2734.5	2712.4	2694.2
37.5°	2701.5	2668.6	2609.9	2584.3	2566.0
40°	2569.9	2540.4	2481.7	2449.1	2434.3
42.5°	2441.7	2412.2	2353.9	2317.1	2295.3
45°	2302.6	2277.0	2221.9	2181.9	2167.1
47.5°	2167.1	2141.5	2082.8	2042.5	2020.7
50°	2024.2	2006.0	1954.7	1903.4	1885.1
52.5°	1885.1	1859.5	1812.2	1771.7	1746.1
55°	1742.6	1720.5	1676.6	1632.7	1614.5
57.5°	1599.7	1581.4	1533.7	1489.8	1475.0
60°	1456.8	1442.4	1391.1	1350.8	1339.9
62.5°	1317.8	1292.1	1255.6	1219.1	1204.4
65°	1175.3	1153.1	1116.6	1083.5	1065.4
67.5°	1028.8	1010.2	977.5	951.9	937.2
70°	893.2	878.5	845.5	819.9	805.5
72.5°	754.2	739.5	721.2	695.6	684.7
75°	614.8	607.8	589.1	567.4	574.8
77.5°	490.5	475.7	468.4	457.5	446.6
80°	366.2	362.3	355.0	344.1	336.7
82.5°	248.9	248.9	245.5	230.7	230.7
85°	149.9	146.4	142.9	131.7	128.2
87.5°	66.0	58.6	51.3	40.4	36.5
90°	3.0	38.2	63.5	79.8	85.9
92.5°	79.8	66.9	76.4	82.8	85.9
95°	206.9	101.7	124.1	140.3	137.0
97.5°	372.6	111.6	162.2	172.1	175.1
100°	564.0	127.5	181.6	206.9	213.4
102.5°	774.0	767.9	188.0	222.8	232.6
105°	968.4	1064.1	194.4	229.3	242.1
107.5°	1194.6	1274.1	200.9	235.7	248.5
110°	1411.4	1478.0	557.6	239.0	251.5

TEST NUMBER: P917825

CATALOG NUMBER: DFN2DIP-SQ4F0-120D160US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1615.3	1672.4	1618.3	245.2	254.9
115°	1831.6	1885.7	1965.5	490.6	261.4
117.5°	2019.7	2083.2	2137.7	1681.9	847.3
120°	2230.0	2277.6	2335.1	2373.3	1943.3
122.5°	2408.1	2459.2	2523.1	2542.0	2545.4
125°	2589.7	2631.3	2691.9	2714.2	2723.7
127.5°	2755.4	2800.1	2848.1	2879.9	2882.9
130°	2911.7	2962.7	2997.5	3032.7	3029.6
132.5°	3070.9	3112.5	3147.3	3176.1	3173.1
135°	3204.8	3255.9	3284.3	3316.4	3309.9
137.5°	3344.8	3383.0	3415.1	3446.9	3437.5
140°	3481.7	3507.4	3542.2	3571.0	3555.1
142.5°	3596.7	3619.0	3660.3	3685.6	3669.7
145°	3717.8	3714.3	3768.5	3790.7	3774.9
147.5°	3822.5	3813.1	3867.2	3883.1	3870.5
150°	3924.7	3902.3	3953.5	3972.4	3956.5
152.5°	4010.5	3985.2	4032.9	4052.2	4029.9
155°	4093.4	4065.0	4103.2	4122.1	4096.8
157.5°	4160.4	4135.0	4163.7	4186.1	4160.4
160°	4217.9	4198.5	4217.9	4236.8	4214.4
162.5°	4268.6	4249.7	4265.5	4287.8	4259.1
165°	4313.2	4294.3	4303.7	4326.1	4303.7
167.5°	4348.4	4329.1	4338.9	4361.2	4332.5
170°	4377.1	4357.9	4364.2	4386.5	4357.9
172.5°	4396.0	4377.1	4383.5	4405.9	4377.1
175°	4411.9	4389.6	4396.0	4418.3	4386.5
177.5°	4418.3	4396.0	4399.4	4421.8	4393.0
180°	4402.4	4402.4	4402.4	4402.4	4402.4

TEST NUMBER: P917825

CATALOG NUMBER: DFN2DIP-SQ4F0-120D160US930-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.00	10.80	11.02	11.83	13.20	9.56	10.36	10.57	11.38	12.75
	3H	11.66	12.38	12.69	13.42	14.80	11.17	11.89	12.20	12.92	14.31
	4H	12.25	12.93	13.29	13.97	15.36	11.76	12.44	12.80	13.47	14.87
	6H	12.65	13.28	13.70	14.32	15.73	12.15	12.78	13.20	13.82	15.23
	8H	12.76	13.35	13.81	14.41	15.81	12.25	12.85	13.31	13.91	15.31
	12H	12.80	13.37	13.86	14.42	15.85	12.29	12.86	13.35	13.91	15.34
4H	2H	10.46	11.14	11.50	12.17	13.57	10.10	10.78	11.15	11.82	13.22
	3H	12.32	12.89	13.38	13.95	15.36	11.92	12.48	12.97	13.55	14.96
	4H	13.04	13.56	14.10	14.61	16.05	12.61	13.13	13.67	14.19	15.62
	6H	13.55	14.00	14.62	15.08	16.51	13.12	13.57	14.19	14.65	16.07
	8H	13.70	14.12	14.77	15.19	16.64	13.27	13.68	14.34	14.76	16.20
	12H	13.78	14.15	14.86	15.24	16.69	13.33	13.70	14.41	14.79	16.24
8H	4H	13.23	13.65	14.30	14.72	16.16	12.85	13.27	13.92	14.34	15.78
	6H	13.86	14.21	14.96	15.32	16.76	13.48	13.83	14.57	14.94	16.38
	8H	14.09	14.39	15.19	15.49	16.94	13.69	14.00	14.79	15.09	16.55
	12H	14.22	14.48	15.32	15.58	17.07	13.81	14.07	14.91	15.17	16.66
12H	4H	13.21	13.59	14.30	14.68	16.12	12.84	13.22	13.93	14.31	15.76
	6H	13.89	14.20	14.99	15.29	16.75	13.52	13.82	14.62	14.92	16.38
	8H	14.14	14.40	15.24	15.49	16.99	13.76	14.02	14.86	15.11	16.61