

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917829

Luminaire Tested: DFN2DIP-SQ4F0-140D060US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917829
REPORT IS A COMBINATION OF REPORTS P901593 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D060US930-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16142.9 lumens
Efficiency: N/A
Efficacy: 85.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 189
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917829

CATALOG NUMBER: DFN2DIP-SQ4F0-140D060US930-FLLONL

Luminous Intensity Polar Plot

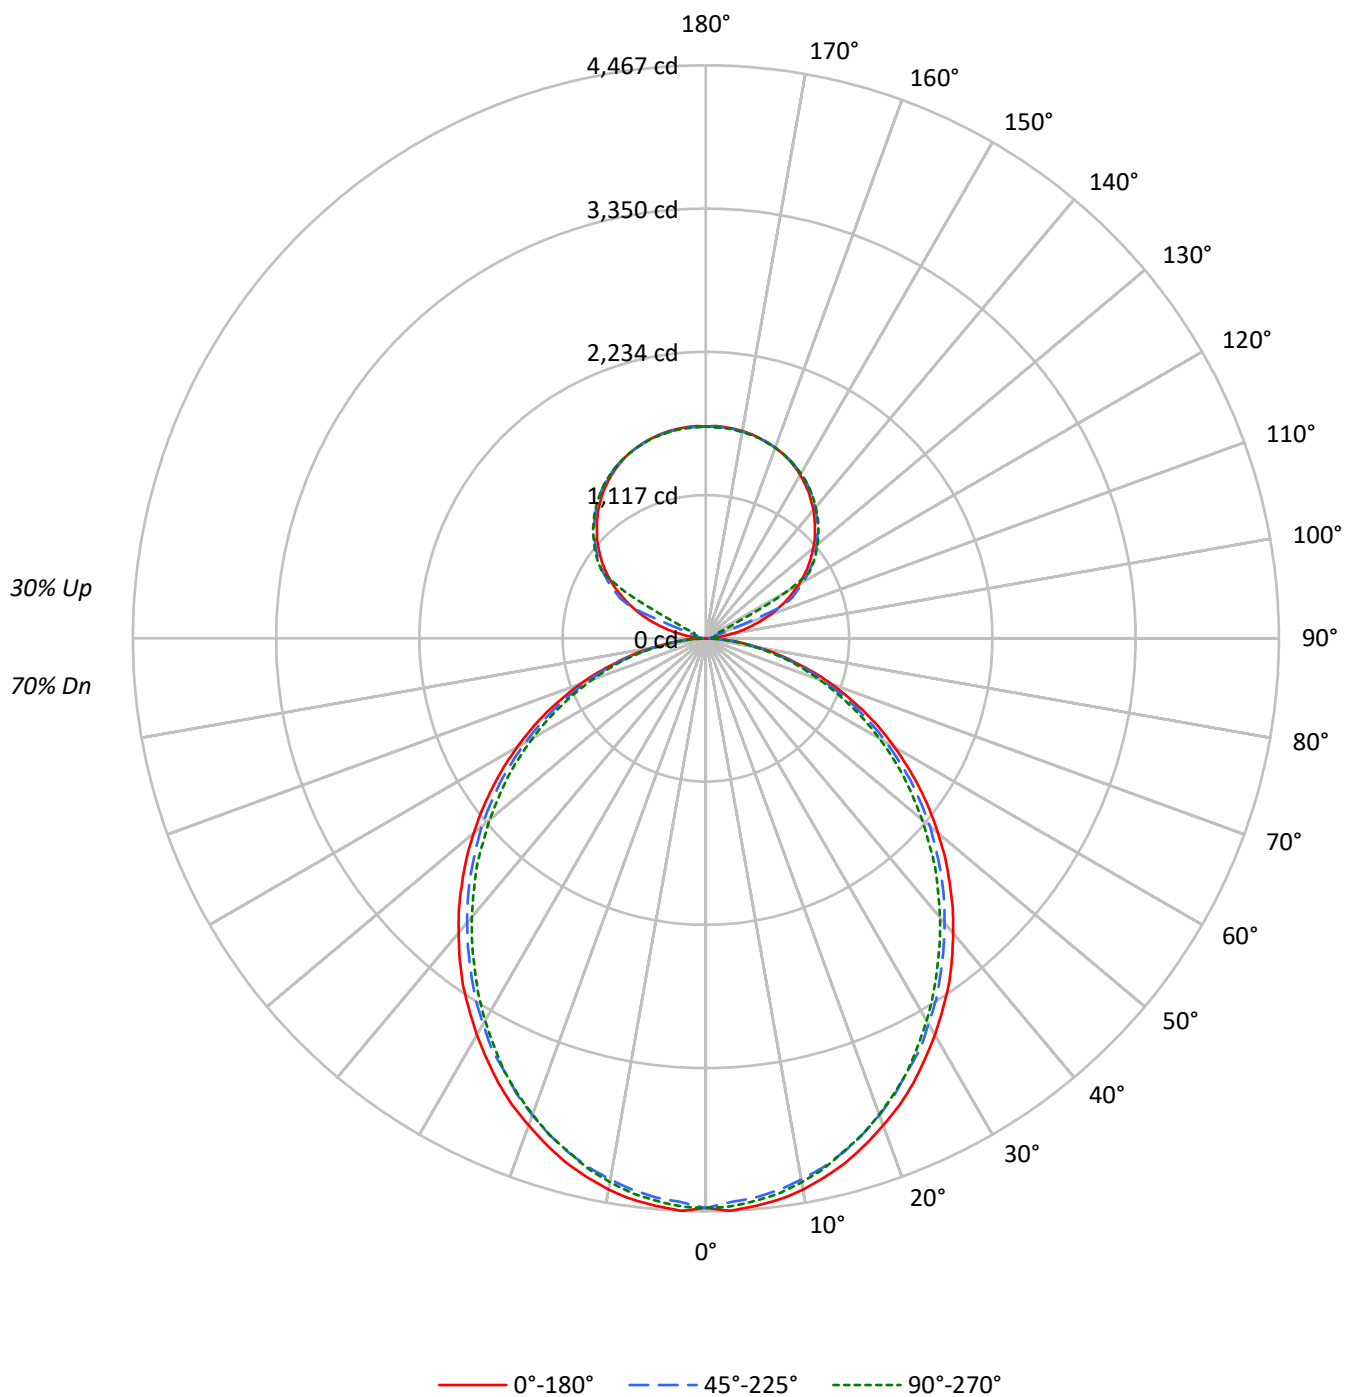

TEST NUMBER: P917829

CATALOG NUMBER: DFN2DIP-SQ4F0-140D060US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	75	75	75
1	102	98	94	90	97	93	89	86	83	80	78	74	72	70	66	64	63
2	93	85	79	74	88	81	75	71	73	68	64	65	62	59	58	55	53
3	85	75	68	62	80	71	65	59	64	59	54	58	53	50	51	48	45
4	78	67	58	52	73	63	56	50	57	51	46	51	47	43	46	42	39
5	72	60	51	45	67	57	49	43	51	45	40	46	41	37	41	37	34
6	66	54	45	39	62	51	43	38	46	40	35	42	37	33	38	33	30
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	27
8	57	44	36	31	54	42	35	30	38	32	28	35	30	26	32	27	24
9	53	40	33	27	50	39	32	27	35	29	25	32	27	23	29	25	22
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3116	3116	3116
5°	3121	3074	3095
10°	3096	3033	3053
15°	3050	2983	2989
20°	2989	2915	2923
25°	2928	2832	2846
30°	2851	2756	2748
35°	2778	2665	2645
40°	2689	2574	2547
45°	2599	2483	2446
50°	2502	2387	2330
55°	2400	2276	2223
60°	2284	2144	2101
65°	2158	2007	1956
70°	1998	1841	1801
75°	1775	1642	1660
80°	1508	1389	1386
85°	1090	950	932

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2599 cd/sqm

TEST NUMBER: P917829

CATALOG NUMBER: DFN2DIP-SQ4F0-140D060US930-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	418.0	2.6
10°-20°	1176.1	7.3
20°-30°	1728.5	10.7
30°-40°	2007.5	12.4
40°-50°	2005.0	12.4
50°-60°	1748.3	10.8
60°-70°	1292.4	8.0
70°-80°	731.2	4.5
80°-90°	195.9	1.2
90°-100°	54.4	0.3
100°-110°	202.9	1.3
110°-120°	538.2	3.3
120°-130°	892.7	5.5
130°-140°	948.2	5.9
140°-150°	881.3	5.5
150°-160°	708.5	4.4
160°-170°	456.5	2.8
170°-180°	157.1	1.0
0°-30°	3322.6	20.6
0°-40°	5330.1	33.0
0°-60°	9083.5	56.3
0°-90°	11302.9	70.0
90°-120°	795.6	4.9
90°-150°	3517.8	21.8
90°-180°	4840.0	30.0
0°-180°	16142.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4441	4441	4441	4441	4441	
5°	4441	4424	4377	4411	4403	422
15°	4228	4202	4147	4164	4143	1191
25°	3826	3792	3720	3728	3720	1761
35°	3301	3259	3190	3164	3143	2062
45°	2686	2657	2592	2546	2528	2073
55°	2033	2007	1956	1905	1884	1818
65°	1371	1345	1303	1264	1243	1356
75°	717	709	687	662	671	766
85°	175	171	167	154	150	195
90°	1	14	24	30	32	15
95°	78	38	47	53	51	92
105°	363	399	73	86	91	388
115°	687	707	737	184	98	676
125°	971	987	1009	1018	1021	866
135°	1202	1221	1232	1244	1241	928
145°	1394	1393	1413	1422	1416	872
155°	1535	1524	1539	1546	1536	707
165°	1618	1610	1614	1622	1614	457
175°	1654	1646	1648	1657	1645	157
180°	1651	1651	1651	1651	1651	

TEST NUMBER: P917829

CATALOG NUMBER: DFN2DIP-SQ4F0-140D060US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4441.3	4441.3	4441.3	4441.3	4441.3
2.5°	4467.1	4445.8	4398.7	4441.3	4433.2
5°	4441.3	4424.5	4377.4	4411.4	4403.3
7.5°	4411.4	4386.1	4338.9	4373.3	4364.7
10°	4364.7	4334.9	4283.7	4317.7	4304.9
12.5°	4300.4	4275.0	4223.8	4245.1	4236.5
15°	4227.9	4202.5	4146.8	4164.1	4142.7
17.5°	4138.2	4112.9	4057.1	4078.4	4057.1
20°	4039.9	4014.5	3954.7	3967.4	3950.6
22.5°	3942.0	3903.5	3847.7	3847.7	3839.2
25°	3826.4	3792.4	3720.0	3728.1	3720.0
27.5°	3698.2	3668.4	3613.1	3600.4	3579.1
30°	3570.4	3536.0	3472.1	3459.5	3442.2
32.5°	3433.6	3408.3	3339.8	3314.0	3296.7
35°	3301.3	3258.7	3190.3	3164.5	3143.1
37.5°	3151.8	3113.3	3044.8	3015.0	2993.6
40°	2998.2	2963.8	2895.3	2857.3	2840.0
42.5°	2848.7	2814.2	2746.3	2703.2	2677.8
45°	2686.4	2656.6	2592.2	2545.5	2528.3
47.5°	2528.3	2498.4	2430.0	2382.9	2357.5
50°	2361.6	2340.3	2280.5	2220.6	2199.3
52.5°	2199.3	2169.4	2114.1	2067.0	2037.2
55°	2033.1	2007.3	1956.1	1904.9	1883.6
57.5°	1866.3	1845.0	1789.3	1738.1	1720.9
60°	1699.6	1682.9	1623.0	1575.9	1563.2
62.5°	1537.4	1507.5	1464.8	1422.3	1405.1
65°	1371.1	1345.2	1302.7	1264.1	1242.8
67.5°	1200.3	1178.5	1140.4	1110.5	1093.3
70°	1042.1	1024.9	986.4	956.5	939.7
72.5°	880.0	862.7	841.4	811.5	798.8
75°	717.3	709.1	687.4	662.0	670.6
77.5°	572.3	555.1	546.4	533.8	521.1
80°	427.3	422.7	414.2	401.5	392.8
82.5°	290.4	290.4	286.3	269.1	269.1
85°	174.9	170.8	166.7	153.6	149.5
87.5°	77.0	68.4	59.8	47.1	42.6
90°	1.1	14.3	23.8	29.9	32.2
92.5°	29.9	25.1	28.6	31.1	32.2
95°	77.6	38.2	46.6	52.7	51.4
97.5°	139.7	41.8	60.8	64.6	65.7
100°	211.5	47.8	68.1	77.6	80.0
102.5°	290.2	288.0	70.5	83.6	87.2
105°	363.1	399.0	72.9	85.9	90.8
107.5°	448.0	477.8	75.3	88.4	93.2
110°	529.3	554.2	209.1	89.7	94.3

TEST NUMBER: P917829

CATALOG NUMBER: DFN2DIP-SQ4F0-140D060US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	605.7	627.1	606.8	91.9	95.6
115°	686.9	707.2	737.1	184.0	98.0
117.5°	757.3	781.2	801.6	630.7	317.7
120°	836.3	854.1	875.7	890.0	728.7
122.5°	903.0	922.2	946.2	953.2	954.6
125°	971.2	986.8	1009.4	1017.8	1021.3
127.5°	1033.3	1050.0	1068.0	1079.9	1081.1
130°	1091.8	1111.0	1124.1	1137.3	1136.1
132.5°	1151.6	1167.2	1180.2	1191.0	1189.8
135°	1201.8	1221.0	1231.6	1243.7	1241.2
137.5°	1254.3	1268.6	1280.7	1292.6	1289.1
140°	1305.6	1315.3	1328.4	1339.1	1333.2
142.5°	1348.7	1357.1	1372.6	1382.1	1376.1
145°	1394.2	1392.9	1413.2	1421.6	1415.6
147.5°	1433.5	1429.9	1450.2	1456.1	1451.5
150°	1471.8	1463.4	1482.5	1489.6	1483.7
152.5°	1504.0	1494.4	1512.3	1519.6	1511.2
155°	1535.0	1524.4	1538.7	1545.8	1536.3
157.5°	1560.2	1550.6	1561.4	1569.8	1560.2
160°	1581.7	1574.4	1581.7	1588.8	1580.5
162.5°	1600.7	1593.6	1599.5	1607.9	1597.2
165°	1617.5	1610.4	1613.9	1622.3	1613.9
167.5°	1630.6	1623.4	1627.1	1635.5	1624.6
170°	1641.4	1634.2	1636.6	1644.9	1634.2
172.5°	1648.5	1641.4	1643.8	1652.2	1641.4
175°	1654.5	1646.1	1648.5	1656.8	1644.9
177.5°	1656.8	1648.5	1649.8	1658.2	1647.4
180°	1650.9	1650.9	1650.9	1650.9	1650.9

TEST NUMBER: P917829

CATALOG NUMBER: DFN2DIP-SQ4F0-140D060US930-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.90	13.98	13.67	14.77	15.72	12.46	13.54	13.22	14.32	15.27
	3H	14.58	15.55	15.36	16.35	17.33	14.09	15.06	14.87	15.86	16.84
	4H	15.18	16.10	15.98	16.90	17.90	14.69	15.60	15.49	16.41	17.40
	6H	15.60	16.44	16.41	17.25	18.26	15.10	15.94	15.91	16.75	17.76
	8H	15.71	16.51	16.53	17.35	18.36	15.21	16.01	16.03	16.84	17.85
	12H	15.77	16.53	16.59	17.36	18.40	15.26	16.02	16.08	16.85	17.89
4H	2H	13.39	14.30	14.19	15.11	16.10	13.04	13.95	13.84	14.75	15.75
	3H	15.28	16.04	16.09	16.88	17.89	14.87	15.64	15.68	16.47	17.49
	4H	16.01	16.70	16.83	17.54	18.58	15.58	16.28	16.41	17.11	18.15
	6H	16.54	17.14	17.38	18.00	19.04	16.11	16.71	16.95	17.57	18.61
	8H	16.70	17.26	17.54	18.11	19.17	16.26	16.82	17.10	17.68	18.73
	12H	16.78	17.29	17.65	18.16	19.23	16.33	16.84	17.20	17.71	18.78
8H	4H	16.22	16.78	17.07	17.64	18.70	15.84	16.41	16.69	17.26	18.32
	6H	16.87	17.33	17.74	18.23	19.29	16.48	16.95	17.36	17.85	18.90
	8H	17.09	17.50	17.98	18.40	19.47	16.70	17.11	17.58	18.01	19.08
	12H	17.24	17.60	18.12	18.49	19.61	16.83	17.19	17.71	18.07	19.20
12H	4H	16.22	16.72	17.08	17.60	18.66	15.85	16.35	16.71	17.23	18.29
	6H	16.90	17.31	17.78	18.21	19.28	16.53	16.94	17.41	17.83	18.91
	8H	17.15	17.52	18.04	18.40	19.53	16.77	17.14	17.66	18.02	19.15