

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917848

Luminaire Tested: DFN2DIP-SQ4F0-140D110US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917848
REPORT IS A COMBINATION OF REPORTS P900163 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D110US930-FLLFLL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19236.9 lumens
Efficiency: N/A
Efficacy: 84.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 226.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917848

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US930-FLLFLL

Luminous Intensity Polar Plot

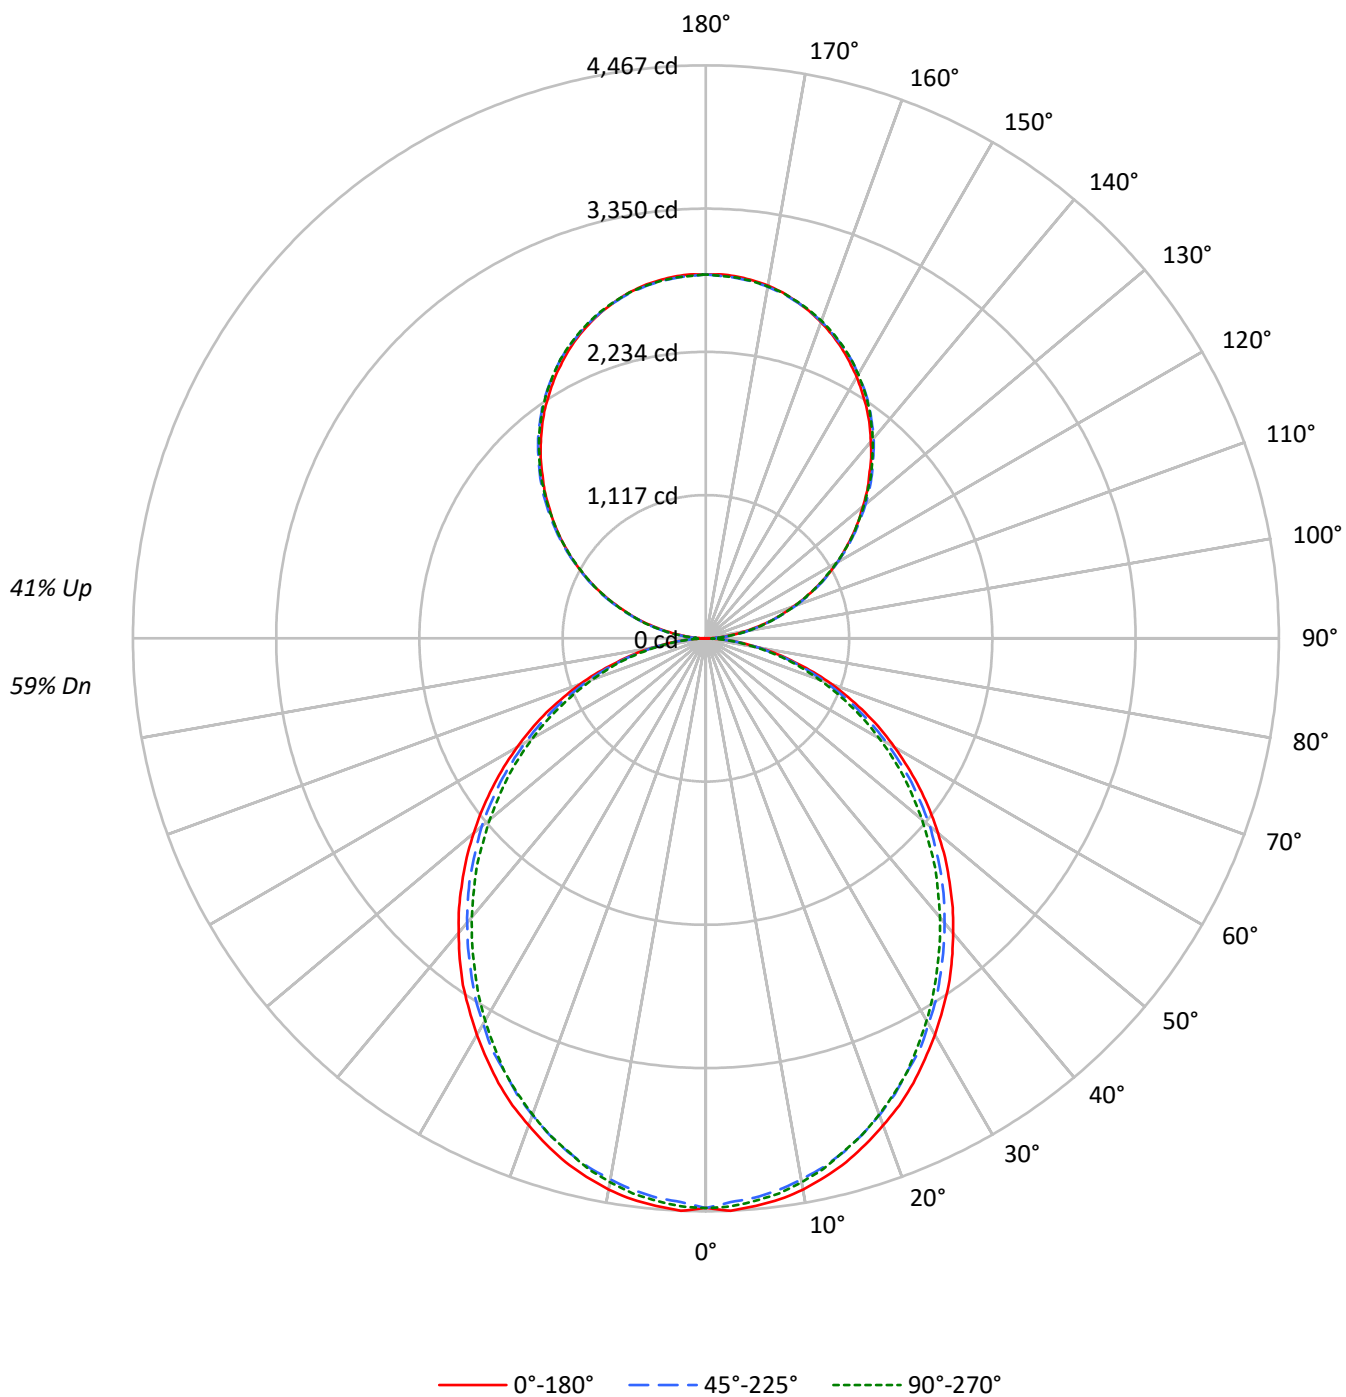

TEST NUMBER: P917848

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US930-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64
1	100	95	91	88	93	89	86	83	77	75	73	67	65	63	57	55	54
2	91	83	77	72	84	78	72	68	68	64	60	59	55	53	50	48	46
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	41	39
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34
5	70	58	50	44	65	54	47	41	48	42	37	41	37	33	36	32	29
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	32	29	26
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	23	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3116	3116	3116
5°	3121	3074	3095
10°	3096	3033	3053
15°	3050	2983	2989
20°	2989	2915	2923
25°	2928	2832	2846
30°	2851	2756	2748
35°	2778	2665	2645
40°	2689	2574	2547
45°	2599	2483	2446
50°	2502	2387	2330
55°	2400	2276	2223
60°	2284	2144	2101
65°	2158	2007	1956
70°	1998	1841	1801
75°	1775	1642	1660
80°	1508	1389	1386
85°	1090	950	932

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2599 cd/sqm

TEST NUMBER: P917848

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	418.0	2.2
10°-20°	1176.1	6.1
20°-30°	1728.5	9.0
30°-40°	2007.5	10.4
40°-50°	2005.0	10.4
50°-60°	1748.3	9.1
60°-70°	1292.4	6.7
70°-80°	731.2	3.8
80°-90°	201.0	1.0
90°-100°	175.5	0.9
100°-110°	557.7	2.9
110°-120°	954.3	5.0
120°-130°	1255.1	6.5
130°-140°	1408.8	7.3
140°-150°	1381.5	7.2
150°-160°	1158.9	6.0
160°-170°	768.5	4.0
170°-180°	268.6	1.4
0°-30°	3322.6	17.3
0°-40°	5330.1	27.7
0°-60°	9083.5	47.2
0°-90°	11308.1	58.8
90°-120°	1687.5	8.8
90°-150°	5732.8	29.8
90°-180°	7929.0	41.2
0°-180°	19236.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4441	4441	4441	4441	4441	
5°	4441	4424	4377	4411	4403	422
15°	4228	4202	4147	4164	4143	1191
25°	3826	3792	3720	3728	3720	1761
35°	3301	3259	3190	3164	3143	2062
45°	2686	2657	2592	2546	2528	2073
55°	2033	2007	1956	1905	1884	1818
65°	1371	1345	1303	1264	1243	1356
75°	717	709	687	662	671	766
85°	175	171	167	154	150	195
90°	2	31	84	79	81	18
95°	125	149	153	153	149	139
105°	515	522	527	531	531	543
115°	958	971	967	965	958	947
125°	1393	1414	1407	1400	1397	1245
135°	1802	1828	1833	1831	1824	1393
145°	2187	2204	2218	2221	2211	1367
155°	2501	2508	2516	2528	2520	1151
165°	2721	2718	2718	2735	2723	768
175°	2831	2824	2819	2836	2822	269
180°	2836	2836	2836	2836	2836	

TEST NUMBER: P917848

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4441.3	4441.3	4441.3	4441.3	4441.3
2.5°	4467.1	4445.8	4398.7	4441.3	4433.2
5°	4441.3	4424.5	4377.4	4411.4	4403.3
7.5°	4411.4	4386.1	4338.9	4373.3	4364.7
10°	4364.7	4334.9	4283.7	4317.7	4304.9
12.5°	4300.4	4275.0	4223.8	4245.1	4236.5
15°	4227.9	4202.5	4146.8	4164.1	4142.7
17.5°	4138.2	4112.9	4057.1	4078.4	4057.1
20°	4039.9	4014.5	3954.7	3967.4	3950.6
22.5°	3942.0	3903.5	3847.7	3847.7	3839.2
25°	3826.4	3792.4	3720.0	3728.1	3720.0
27.5°	3698.2	3668.4	3613.1	3600.4	3579.1
30°	3570.4	3536.0	3472.1	3459.5	3442.2
32.5°	3433.6	3408.3	3339.8	3314.0	3296.7
35°	3301.3	3258.7	3190.3	3164.5	3143.1
37.5°	3151.8	3113.3	3044.8	3015.0	2993.6
40°	2998.2	2963.8	2895.3	2857.3	2840.0
42.5°	2848.7	2814.2	2746.3	2703.2	2677.8
45°	2686.4	2656.6	2592.2	2545.5	2528.3
47.5°	2528.3	2498.4	2430.0	2382.9	2357.5
50°	2361.6	2340.3	2280.5	2220.6	2199.3
52.5°	2199.3	2169.4	2114.1	2067.0	2037.2
55°	2033.1	2007.3	1956.1	1904.9	1883.6
57.5°	1866.3	1845.0	1789.3	1738.1	1720.9
60°	1699.6	1682.9	1623.0	1575.9	1563.2
62.5°	1537.4	1507.5	1464.8	1422.3	1405.1
65°	1371.1	1345.2	1302.7	1264.1	1242.8
67.5°	1200.3	1178.5	1140.4	1110.5	1093.3
70°	1042.1	1024.9	986.4	956.5	939.7
72.5°	880.0	862.7	841.4	811.5	798.8
75°	717.3	709.1	687.4	662.0	670.6
77.5°	572.3	555.1	546.4	533.8	521.1
80°	427.3	422.7	414.2	401.5	392.8
82.5°	290.4	290.4	286.3	269.1	269.1
85°	174.9	170.8	166.7	153.6	149.5
87.5°	77.0	68.4	59.8	47.1	42.6
90°	2.5	30.8	83.8	78.7	81.2
92.5°	53.0	71.8	74.4	77.0	77.0
95°	124.8	148.8	153.0	153.0	148.8
97.5°	207.8	230.0	239.5	239.5	239.5
100°	303.5	323.2	330.0	330.0	327.5
102.5°	404.5	419.0	428.4	431.0	428.4
105°	514.8	521.6	526.8	531.0	531.0
107.5°	624.2	634.5	634.5	636.2	624.2
110°	730.3	744.0	744.0	744.0	737.1

TEST NUMBER: P917848

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	844.8	859.3	856.8	849.9	844.8
115°	957.7	971.3	967.1	964.6	957.7
117.5°	1069.8	1088.5	1076.5	1069.8	1062.9
120°	1182.6	1201.4	1182.6	1182.6	1174.9
122.5°	1285.2	1309.1	1297.1	1290.3	1285.2
125°	1392.9	1414.3	1407.4	1399.8	1397.2
127.5°	1498.1	1524.6	1515.2	1505.0	1498.1
130°	1596.4	1627.3	1622.9	1617.8	1608.4
132.5°	1706.7	1730.7	1732.4	1720.4	1713.6
135°	1801.6	1828.1	1833.3	1830.8	1823.9
137.5°	1907.7	1929.1	1933.3	1931.6	1921.4
140°	2000.9	2022.3	2034.3	2034.3	2024.9
142.5°	2096.7	2118.1	2124.9	2127.4	2118.1
145°	2187.3	2204.4	2218.1	2220.6	2211.3
147.5°	2268.6	2289.9	2300.2	2304.4	2295.1
150°	2352.4	2366.9	2376.3	2384.0	2376.3
152.5°	2426.7	2441.2	2453.2	2462.7	2453.2
155°	2501.2	2507.9	2515.7	2527.7	2519.9
157.5°	2565.3	2570.4	2574.6	2591.8	2579.8
160°	2622.6	2627.7	2630.2	2644.8	2634.6
162.5°	2675.6	2675.6	2678.2	2694.4	2682.4
165°	2720.9	2718.3	2718.3	2735.4	2723.4
167.5°	2761.9	2754.2	2754.2	2771.4	2759.4
170°	2792.7	2785.9	2783.3	2800.4	2785.9
172.5°	2814.1	2807.2	2804.7	2821.8	2807.2
175°	2831.2	2824.4	2819.2	2836.3	2821.8
177.5°	2840.6	2833.7	2828.6	2843.2	2828.6
180°	2836.3	2836.3	2836.3	2836.3	2836.3

TEST NUMBER: P917848

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.01	12.95	12.88	13.85	14.99	11.56	12.51	12.44	13.41	14.55
	3H	13.68	14.53	14.57	15.43	16.60	13.19	14.04	14.08	14.94	16.11
	4H	14.27	15.07	15.18	15.99	17.16	13.78	14.58	14.68	15.49	16.67
	6H	14.68	15.42	15.60	16.34	17.53	14.18	14.92	15.10	15.84	17.03
	8H	14.79	15.49	15.71	16.43	17.62	14.29	14.99	15.21	15.93	17.12
	12H	14.84	15.51	15.77	16.44	17.66	14.33	15.00	15.26	15.93	17.15
4H	2H	12.48	13.28	13.39	14.19	15.37	12.12	12.93	13.03	13.84	15.02
	3H	14.36	15.03	15.28	15.97	17.16	13.95	14.62	14.87	15.56	16.75
	4H	15.08	15.69	16.01	16.63	17.84	14.65	15.26	15.59	16.21	17.42
	6H	15.60	16.13	16.55	17.09	18.31	15.17	15.70	16.11	16.66	17.88
	8H	15.76	16.25	16.70	17.21	18.44	15.32	15.81	16.27	16.77	18.00
	12H	15.83	16.28	16.80	17.25	18.49	15.39	15.83	16.35	16.81	18.04
8H	4H	15.28	15.77	16.23	16.73	17.96	14.90	15.40	15.85	16.36	17.59
	6H	15.92	16.33	16.89	17.33	18.56	15.54	15.95	16.51	16.95	18.17
	8H	16.15	16.51	17.13	17.49	18.74	15.75	16.11	16.74	17.10	18.35
	12H	16.28	16.60	17.27	17.58	18.88	15.87	16.19	16.86	17.17	18.47
12H	4H	15.27	15.72	16.24	16.69	17.93	14.90	15.35	15.87	16.32	17.56
	6H	15.95	16.31	16.93	17.30	18.55	15.58	15.94	16.56	16.93	18.18
	8H	16.20	16.52	17.19	17.50	18.79	15.82	16.14	16.81	17.12	18.41