

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917862

Luminaire Tested: DFN2DIP-SQ4F0-140D160US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917862
REPORT IS A COMBINATION OF REPORTS P900218 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D160US930-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 21247.4 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 265.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917862

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US930-RLLFLL

Luminous Intensity Polar Plot

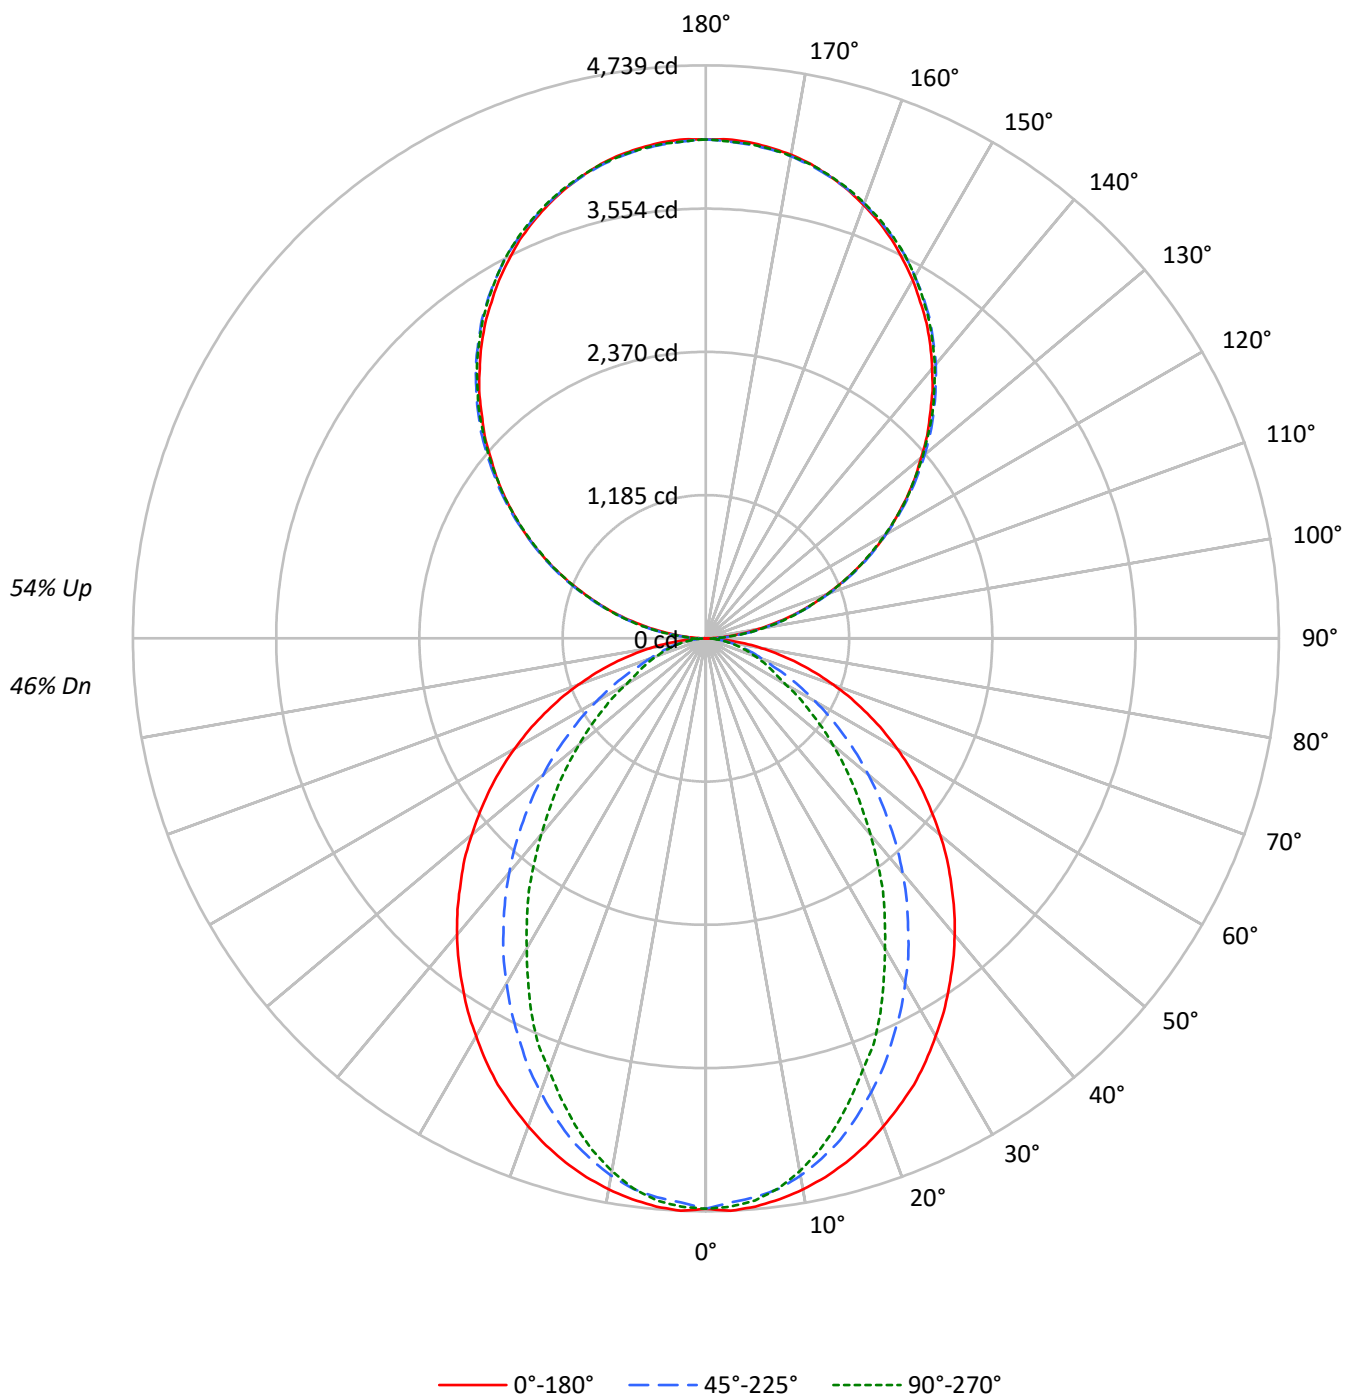

TEST NUMBER: P917862

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	86	89	86	82	80	72	69	67	59	57	56	47	46	45
2	89	82	76	71	81	75	70	66	63	60	56	52	49	47	42	40	38
3	81	72	65	60	74	67	61	56	56	52	48	46	43	40	37	35	33
4	75	64	57	51	68	59	53	48	50	45	41	42	38	35	34	31	29
5	69	57	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23
7	59	47	39	34	54	43	37	32	37	32	28	31	27	24	26	23	20
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	18
9	51	39	32	27	47	36	30	25	31	26	22	26	22	20	22	19	17
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3310	3310	3310
5°	3315	3258	3279
10°	3283	3195	3174
15°	3237	3090	3009
20°	3177	2945	2808
25°	3116	2782	2613
30°	3034	2616	2366
35°	2953	2436	2148
40°	2871	2251	1899
45°	2776	2045	1673
50°	2677	1836	1452
55°	2575	1614	1240
60°	2456	1381	1021
65°	2319	1145	920
70°	2153	924	835
75°	1944	816	761
80°	1642	687	664
85°	1143	462	505

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3246 cd/sqm

TEST NUMBER: P917862

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	442.1	2.1
10°-20°	1213.7	5.7
20°-30°	1704.0	8.0
30°-40°	1857.5	8.7
40°-50°	1707.2	8.0
50°-60°	1340.8	6.3
60°-70°	872.7	4.1
70°-80°	449.2	2.1
80°-90°	126.4	0.6
90°-100°	255.3	1.2
100°-110°	811.2	3.8
110°-120°	1388.2	6.5
120°-130°	1825.7	8.6
130°-140°	2049.3	9.6
140°-150°	2009.6	9.5
150°-160°	1685.7	7.9
160°-170°	1117.9	5.3
170°-180°	390.8	1.8
0°-30°	3359.9	15.8
0°-40°	5217.4	24.6
0°-60°	8265.4	38.9
0°-90°	9713.7	45.7
90°-120°	2454.7	11.6
90°-150°	8339.3	39.2
90°-180°	11534.0	54.3
0°-180°	21247.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4718	4718	4718	4718	4718	
5°	4718	4696	4640	4679	4666	447
15°	4487	4440	4295	4214	4171	1264
25°	4073	3936	3654	3480	3415	1873
35°	3510	3292	2916	2647	2553	2197
45°	2869	2583	2135	1831	1729	2216
55°	2181	1848	1387	1132	1050	1949
65°	1473	1127	743	598	585	1460
75°	785	486	342	312	308	831
85°	183	94	81	81	81	211
90°	4	45	122	114	118	21
95°	182	216	223	223	216	202
105°	749	759	766	772	772	790
115°	1393	1413	1407	1403	1393	1378
125°	2026	2057	2047	2036	2032	1811
135°	2621	2659	2667	2663	2653	2026
145°	3182	3207	3226	3230	3217	1988
155°	3638	3648	3659	3677	3666	1675
165°	3958	3954	3954	3979	3962	1117
175°	4118	4108	4101	4126	4105	391
180°	4126	4126	4126	4126	4126	

TEST NUMBER: P917862

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4717.5	4717.5	4717.5	4717.5	4717.5
2.5°	4738.8	4717.5	4670.4	4713.4	4704.8
5°	4717.5	4696.2	4640.4	4679.0	4666.3
7.5°	4679.0	4653.6	4593.8	4610.6	4589.3
10°	4627.8	4597.9	4512.8	4499.5	4474.2
12.5°	4563.9	4525.4	4409.9	4384.5	4337.5
15°	4486.9	4439.8	4294.8	4213.8	4171.2
17.5°	4397.2	4328.8	4149.5	4055.7	3987.3
20°	4294.8	4209.2	3995.9	3889.5	3795.3
22.5°	4183.9	4085.6	3837.9	3692.9	3629.1
25°	4072.9	3936.1	3654.4	3479.5	3415.2
27.5°	3940.7	3795.3	3483.6	3283.0	3184.7
30°	3799.8	3637.2	3295.7	3078.2	2962.7
32.5°	3663.0	3466.4	3116.7	2860.4	2753.5
35°	3509.5	3291.6	2916.1	2647.0	2552.8
37.5°	3360.0	3124.9	2728.1	2433.3	2326.8
40°	3201.9	2946.0	2531.5	2228.5	2117.6
42.5°	3039.8	2766.6	2335.4	2019.2	1912.8
45°	2869.0	2582.7	2134.8	1831.2	1728.9
47.5°	2706.8	2403.8	1942.7	1639.2	1545.5
50°	2527.4	2224.5	1754.7	1459.9	1370.6
52.5°	2352.1	2031.9	1575.3	1293.6	1212.5
55°	2181.4	1848.4	1387.4	1131.5	1050.3
57.5°	2006.5	1665.0	1221.2	982.0	913.6
60°	1827.2	1485.6	1045.9	828.4	760.0
62.5°	1652.4	1310.8	896.4	691.6	657.7
65°	1473.0	1126.9	742.8	597.9	584.7
67.5°	1302.2	956.2	597.9	525.0	512.3
70°	1122.8	789.9	495.0	452.5	435.3
72.5°	952.1	635.9	414.0	380.0	371.4
75°	785.4	486.5	341.5	311.6	307.5
77.5°	619.2	345.6	269.0	251.8	243.2
80°	465.2	247.8	204.7	188.0	188.0
82.5°	324.3	166.6	140.9	132.2	132.2
85°	183.4	93.8	81.0	81.0	81.0
87.5°	68.4	34.0	34.0	29.9	29.9
90°	3.8	44.8	121.9	114.5	118.1
92.5°	77.1	104.5	108.2	111.9	111.9
95°	181.6	216.5	222.7	222.7	216.5
97.5°	302.2	334.6	348.3	348.3	348.3
100°	441.6	470.2	480.1	480.1	476.4
102.5°	588.3	609.5	623.1	626.9	623.1
105°	748.8	758.7	766.2	772.4	772.4
107.5°	908.0	922.9	922.9	925.4	908.0
110°	1062.3	1082.1	1082.1	1082.1	1072.2

TEST NUMBER: P917862

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1228.9	1250.1	1246.3	1236.4	1228.9
115°	1393.1	1413.0	1406.8	1403.0	1393.1
117.5°	1556.1	1583.4	1566.0	1556.1	1546.1
120°	1720.3	1747.6	1720.3	1720.3	1709.0
122.5°	1869.5	1904.4	1886.9	1877.0	1869.5
125°	2026.3	2057.3	2047.4	2036.2	2032.5
127.5°	2179.2	2217.8	2204.1	2189.2	2179.2
130°	2322.3	2367.1	2360.9	2353.4	2339.7
132.5°	2482.7	2517.6	2520.0	2502.6	2492.7
135°	2620.8	2659.3	2666.8	2663.1	2653.1
137.5°	2775.0	2806.1	2812.4	2809.8	2794.9
140°	2910.6	2941.7	2959.1	2959.1	2945.4
142.5°	3049.9	3081.0	3091.0	3094.7	3081.0
145°	3181.8	3206.6	3226.5	3230.3	3216.6
147.5°	3299.9	3331.1	3346.0	3352.2	3338.5
150°	3421.8	3443.0	3456.7	3467.9	3456.7
152.5°	3530.1	3551.2	3568.6	3582.3	3568.6
155°	3638.3	3648.2	3659.4	3676.8	3665.7
157.5°	3731.5	3739.0	3745.2	3770.1	3752.7
160°	3814.9	3822.4	3826.1	3847.2	3832.3
162.5°	3892.0	3892.0	3895.7	3919.4	3901.9
165°	3957.9	3954.2	3954.2	3979.1	3961.7
167.5°	4017.6	4006.5	4006.5	4031.3	4013.9
170°	4062.4	4052.4	4048.8	4073.6	4052.4
172.5°	4093.5	4083.6	4079.8	4104.7	4083.6
175°	4118.4	4108.5	4101.0	4125.9	4104.7
177.5°	4132.1	4122.1	4114.6	4135.8	4114.6
180°	4125.9	4125.9	4125.9	4125.9	4125.9

TEST NUMBER: P917862

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.90	11.70	11.90	12.71	14.04	6.86	7.66	7.86	8.67	10.00
	3H	12.58	13.29	13.59	14.31	15.66	8.05	8.76	9.06	9.78	11.13
	4H	13.19	13.87	14.21	14.88	16.25	8.50	9.17	9.52	10.19	11.55
	6H	13.62	14.24	14.65	15.26	16.63	8.82	9.44	9.85	10.46	11.84
	8H	13.74	14.33	14.78	15.37	16.74	8.91	9.50	9.95	10.54	11.91
	12H	13.81	14.37	14.85	15.40	16.79	8.95	9.51	9.99	10.54	11.94
4H	2H	10.92	11.59	11.95	12.61	13.97	7.46	8.13	8.49	9.15	10.51
	3H	12.75	13.31	13.78	14.35	15.73	8.81	9.37	9.84	10.41	11.79
	4H	13.44	13.95	14.49	14.99	16.39	9.35	9.86	10.40	10.90	12.30
	6H	13.96	14.40	15.01	15.46	16.85	9.77	10.21	10.82	11.27	12.67
	8H	14.14	14.55	15.19	15.60	17.01	9.90	10.31	10.95	11.36	12.77
	12H	14.23	14.60	15.30	15.67	17.09	9.96	10.33	11.04	11.40	12.82
8H	4H	13.41	13.82	14.46	14.87	16.28	9.63	10.04	10.69	11.10	12.51
	6H	13.98	14.32	15.05	15.41	16.82	10.15	10.49	11.23	11.59	12.99
	8H	14.20	14.49	15.28	15.57	17.00	10.34	10.64	11.43	11.72	13.15
	12H	14.34	14.60	15.42	15.67	17.14	10.46	10.72	11.55	11.80	13.26
12H	4H	13.36	13.73	14.43	14.80	16.21	9.64	10.01	10.71	11.08	12.49
	6H	13.95	14.25	15.04	15.33	16.76	10.20	10.50	11.29	11.58	13.00
	8H	14.17	14.44	15.26	15.51	16.98	10.41	10.67	11.50	11.75	13.21