

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917871

Luminaire Tested: DFN2DIP-SQ4F0-160D070US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917871
REPORT IS A COMBINATION OF REPORTS P901614 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-160D070US930-RLLONL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16738.1 lumens
Efficiency: N/A
Efficacy: 76.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 218.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917871

CATALOG NUMBER: DFN2DIP-SQ4F0-160D070US930-RLLONL

Luminous Intensity Polar Plot

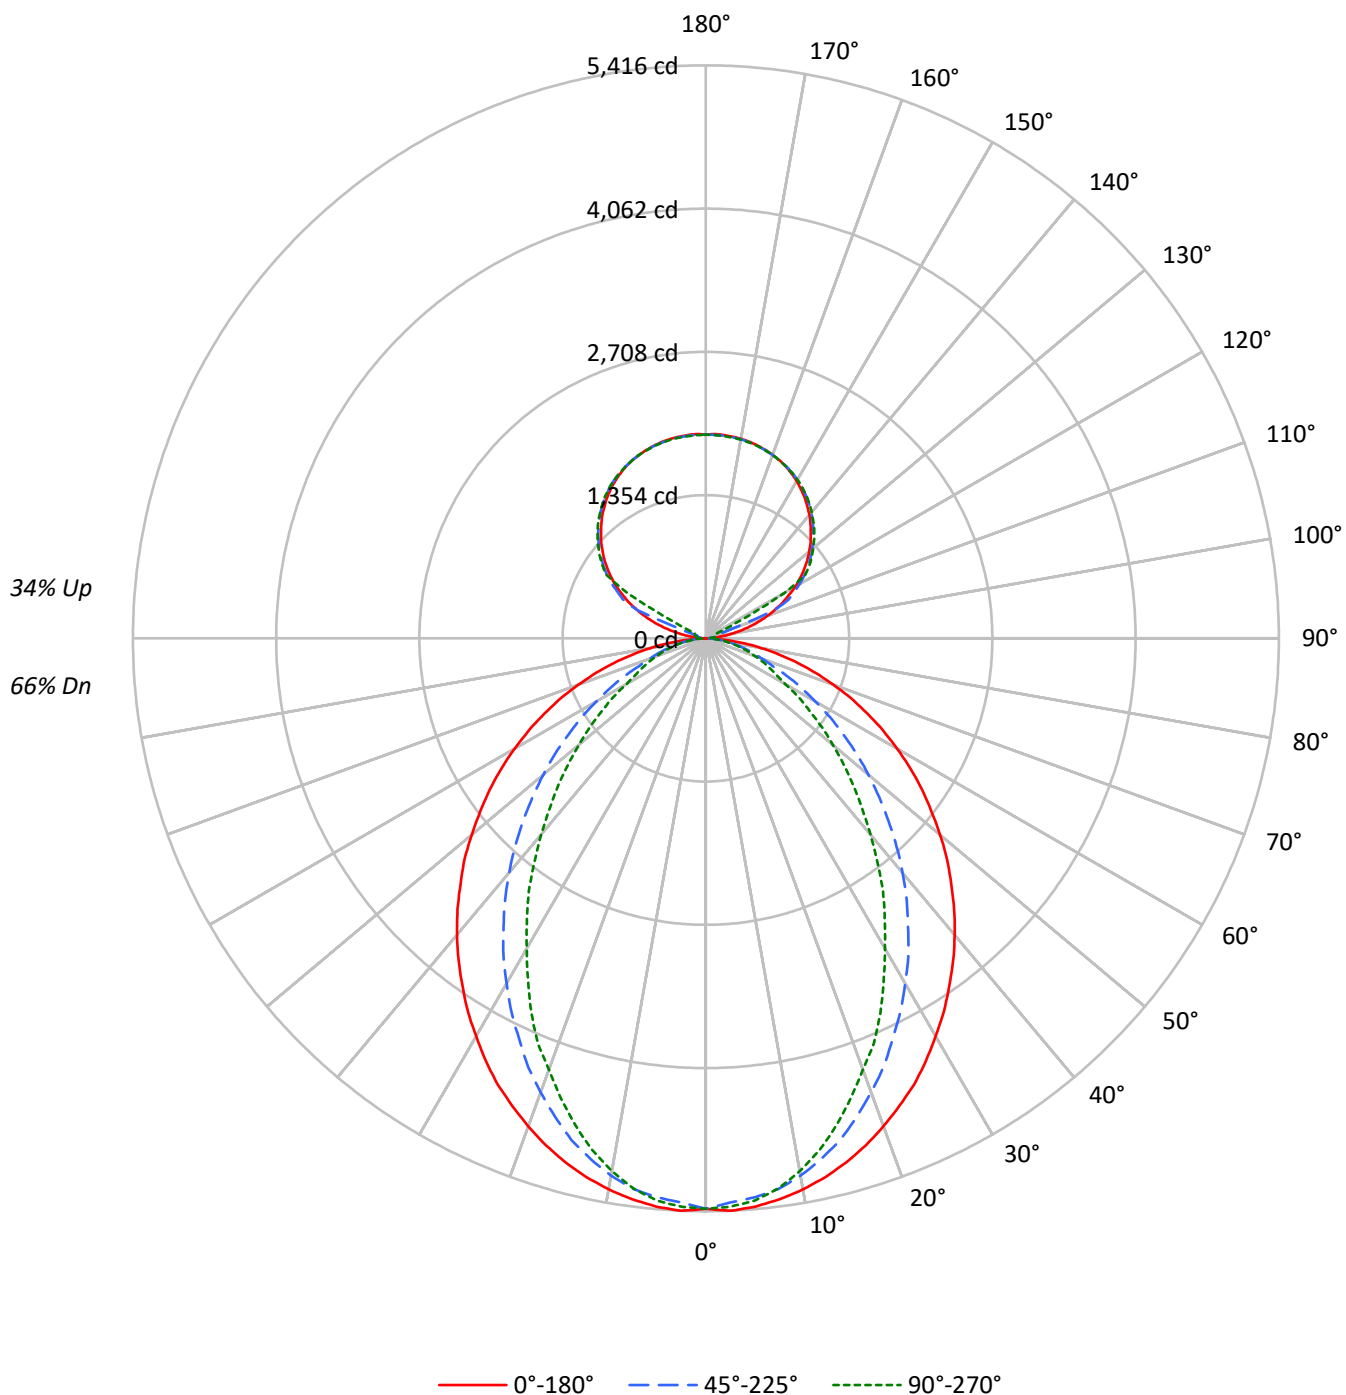

TEST NUMBER: P917871

CATALOG NUMBER: DFN2DIP-SQ4F0-160D070US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66		
1	102	98	94	91	96	92	89	86	82	80	77	73	71	69	64	63	61	57		
2	93	86	80	75	88	82	76	72	73	69	65	65	61	59	57	55	53	49		
3	86	76	69	64	81	72	66	61	65	60	56	58	54	50	51	48	46	42		
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	43	40	37		
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35	32		
6	67	55	47	41	63	53	45	40	47	41	37	43	38	34	38	34	31	29		
7	62	50	42	37	59	48	41	35	43	37	33	39	34	30	35	31	28	26		
8	58	46	38	33	55	44	37	32	40	34	30	36	31	27	32	28	25	23		
9	54	42	35	30	51	40	33	29	37	31	27	33	28	25	30	26	23	21		
10	51	39	32	27	48	37	30	26	34	28	24	31	26	23	28	24	21	19		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3783	3783	3783
5°	3789	3724	3748
10°	3751	3651	3627
15°	3700	3531	3439
20°	3631	3366	3209
25°	3561	3180	2986
30°	3467	2989	2704
35°	3375	2784	2455
40°	3282	2572	2170
45°	3173	2337	1912
50°	3060	2099	1659
55°	2942	1845	1417
60°	2806	1579	1167
65°	2650	1308	1052
70°	2460	1056	954
75°	2222	932	870
80°	1877	785	758
85°	1306	528	578

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3173 cd/sqm

TEST NUMBER: P917871

CATALOG NUMBER: DFN2DIP-SQ4F0-160D070US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	505.3	3.0
10°-20°	1387.1	8.3
20°-30°	1947.5	11.6
30°-40°	2122.9	12.7
40°-50°	1951.1	11.7
50°-60°	1532.3	9.2
60°-70°	997.4	6.0
70°-80°	513.4	3.1
80°-90°	134.5	0.8
90°-100°	63.5	0.4
100°-110°	236.8	1.4
110°-120°	627.9	3.8
120°-130°	1041.5	6.2
130°-140°	1106.3	6.6
140°-150°	1028.1	6.1
150°-160°	826.6	4.9
160°-170°	532.6	3.2
170°-180°	183.3	1.1
0°-30°	3839.9	22.9
0°-40°	5962.7	35.6
0°-60°	9446.2	56.4
0°-90°	11091.4	66.3
90°-120°	928.2	5.5
90°-150°	4104.1	24.5
90°-180°	5647.0	33.7
0°-180°	16738.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5391	5391	5391	5391	5391	
5°	5391	5367	5303	5347	5333	511
15°	5128	5074	4908	4816	4767	1445
25°	4655	4498	4176	3977	3903	2141
35°	4011	3762	3333	3025	2918	2510
45°	3279	2952	2440	2093	1976	2532
55°	2493	2112	1586	1293	1200	2228
65°	1683	1288	849	683	668	1669
75°	898	556	390	356	352	949
85°	210	107	93	93	93	241
90°	1	17	28	35	38	16
95°	90	44	54	61	60	107
105°	424	466	85	100	106	453
115°	801	825	860	215	114	789
125°	1133	1151	1178	1188	1192	1010
135°	1402	1424	1437	1451	1448	1083
145°	1626	1625	1649	1658	1652	1017
155°	1791	1778	1795	1803	1792	825
165°	1887	1879	1883	1893	1883	533
175°	1930	1920	1923	1933	1919	184
180°	1926	1926	1926	1926	1926	

TEST NUMBER: P917871

CATALOG NUMBER: DFN2DIP-SQ4F0-160D070US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5391.4	5391.4	5391.4	5391.4	5391.4
2.5°	5415.7	5391.4	5337.5	5386.8	5376.9
5°	5391.4	5367.0	5303.4	5347.4	5332.9
7.5°	5347.4	5318.4	5250.0	5269.2	5244.9
10°	5288.9	5254.8	5157.4	5142.4	5113.4
12.5°	5215.9	5171.9	5039.9	5010.9	4957.1
15°	5127.9	5074.1	4908.4	4815.7	4767.0
17.5°	5025.4	4947.2	4742.3	4635.1	4556.9
20°	4908.4	4810.6	4566.7	4445.1	4337.5
22.5°	4781.6	4669.2	4386.1	4220.5	4147.4
25°	4654.8	4498.4	4176.4	3976.6	3903.2
27.5°	4503.6	4337.5	3981.3	3752.0	3639.7
30°	4342.6	4156.8	3766.4	3518.0	3386.0
32.5°	4186.3	3961.6	3562.0	3269.0	3146.8
35°	4010.8	3761.8	3332.7	3025.2	2917.5
37.5°	3840.0	3571.3	3117.9	2780.8	2659.2
40°	3659.3	3366.9	2893.2	2546.8	2420.0
42.5°	3474.0	3161.8	2669.0	2307.7	2186.1
45°	3278.8	2951.7	2439.7	2092.9	1975.9
47.5°	3093.5	2747.2	2220.2	1873.4	1766.3
50°	2888.5	2542.2	2005.4	1668.4	1566.4
52.5°	2688.2	2322.2	1800.4	1478.5	1385.8
55°	2493.0	2112.5	1585.6	1293.1	1200.4
57.5°	2293.2	1902.9	1395.6	1122.3	1044.1
60°	2088.2	1697.9	1195.2	946.8	868.6
62.5°	1888.4	1498.1	1024.4	790.4	751.6
65°	1683.4	1287.9	849.0	683.3	668.3
67.5°	1488.2	1092.7	683.3	600.0	585.5
70°	1283.3	902.8	565.8	517.1	497.5
72.5°	1088.1	726.8	473.1	434.3	424.4
75°	897.6	556.0	390.3	356.1	351.5
77.5°	707.6	394.9	307.4	287.8	278.0
80°	531.7	283.2	234.0	214.8	214.8
82.5°	370.6	190.5	161.0	151.2	151.2
85°	209.6	107.1	92.7	92.7	92.7
87.5°	78.2	38.8	38.8	34.2	34.2
90°	1.3	16.7	27.8	34.9	37.6
92.5°	34.9	29.3	33.4	36.3	37.6
95°	90.5	44.5	54.3	61.4	59.9
97.5°	163.0	48.8	71.0	75.3	76.6
100°	246.8	55.8	79.4	90.5	93.4
102.5°	338.6	336.0	82.3	97.5	101.7
105°	423.7	465.5	85.0	100.3	105.9
107.5°	522.6	557.4	87.9	103.1	108.8
110°	617.5	646.6	243.9	104.6	110.1

TEST NUMBER: P917871

CATALOG NUMBER: DFN2DIP-SQ4F0-160D070US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	706.7	731.6	708.0	107.2	111.5
115°	801.4	825.0	859.9	214.7	114.4
117.5°	883.6	911.4	935.2	735.8	370.7
120°	975.6	996.5	1021.7	1038.4	850.2
122.5°	1053.5	1075.9	1103.9	1112.1	1113.6
125°	1133.0	1151.2	1177.7	1187.5	1191.6
127.5°	1205.5	1225.0	1246.0	1260.0	1261.3
130°	1273.8	1296.2	1311.4	1326.8	1325.5
132.5°	1343.5	1361.7	1377.0	1389.5	1388.2
135°	1402.1	1424.4	1436.9	1450.9	1448.1
137.5°	1463.3	1480.1	1494.1	1508.1	1503.9
140°	1523.2	1534.5	1549.7	1562.3	1555.3
142.5°	1573.5	1583.3	1601.3	1612.4	1605.5
145°	1626.5	1625.1	1648.7	1658.5	1651.5
147.5°	1672.3	1668.3	1691.9	1698.8	1693.4
150°	1717.0	1707.3	1729.7	1737.9	1731.0
152.5°	1754.6	1743.5	1764.4	1772.8	1763.1
155°	1790.9	1778.4	1795.1	1803.4	1792.4
157.5°	1820.2	1809.1	1821.6	1831.4	1820.2
160°	1845.3	1836.9	1845.3	1853.6	1843.8
162.5°	1867.5	1859.2	1866.1	1875.9	1863.4
165°	1887.0	1878.8	1882.8	1892.6	1882.8
167.5°	1902.4	1893.9	1898.3	1908.0	1895.5
170°	1915.0	1906.6	1909.3	1919.1	1906.6
172.5°	1923.3	1915.0	1917.8	1927.5	1915.0
175°	1930.2	1920.4	1923.3	1933.0	1919.1
177.5°	1933.0	1923.3	1924.8	1934.5	1921.9
180°	1926.1	1926.1	1926.1	1926.1	1926.1

TEST NUMBER: P917871

CATALOG NUMBER: DFN2DIP-SQ4F0-160D070US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.18	14.16	13.99	14.99	16.01	9.14	10.12	9.95	10.95	11.97
	3H	14.87	15.75	15.70	16.59	17.64	10.34	11.22	11.17	12.06	13.11
	4H	15.49	16.32	16.33	17.17	18.23	10.80	11.63	11.64	12.47	13.54
	6H	15.93	16.69	16.78	17.54	18.62	11.13	11.89	11.98	12.75	13.82
	8H	16.06	16.79	16.92	17.66	18.73	11.22	11.95	12.09	12.82	13.90
	12H	16.13	16.82	16.99	17.68	18.78	11.27	11.97	12.14	12.83	13.93
4H	2H	13.22	14.05	14.06	14.89	15.95	9.76	10.59	10.60	11.43	12.49
	3H	15.07	15.75	15.92	16.63	17.71	11.12	11.81	11.98	12.69	13.77
	4H	15.77	16.39	16.64	17.27	18.37	11.68	12.30	12.55	13.18	14.28
	6H	16.29	16.83	17.18	17.73	18.84	12.11	12.65	12.99	13.55	14.65
	8H	16.48	16.98	17.36	17.87	18.99	12.24	12.74	13.13	13.64	14.76
	12H	16.58	17.03	17.49	17.95	19.07	12.31	12.76	13.22	13.68	14.80
8H	4H	15.75	16.25	16.63	17.14	18.26	11.97	12.48	12.86	13.37	14.49
	6H	16.32	16.74	17.24	17.68	18.79	12.50	12.91	13.41	13.85	14.97
	8H	16.54	16.91	17.47	17.84	18.98	12.69	13.06	13.61	13.99	15.12
	12H	16.69	17.02	17.62	17.94	19.13	12.82	13.14	13.74	14.06	15.25
12H	4H	15.70	16.16	16.61	17.07	18.20	11.98	12.44	12.89	13.35	14.48
	6H	16.30	16.67	17.22	17.60	18.73	12.55	12.92	13.47	13.85	14.98
	8H	16.53	16.85	17.46	17.77	18.96	12.77	13.09	13.69	14.01	15.20