

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920398

Luminaire Tested: DFN2DIP-SQ4F0-080D110US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920398
REPORT IS A COMBINATION OF REPORTS P900154 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-080D110US935-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14236.6 lumens
Efficiency: N/A
Efficacy: 92.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 154.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920398

CATALOG NUMBER: DFN2DIP-SQ4F0-080D110US935-RLLFLL

Luminous Intensity Polar Plot

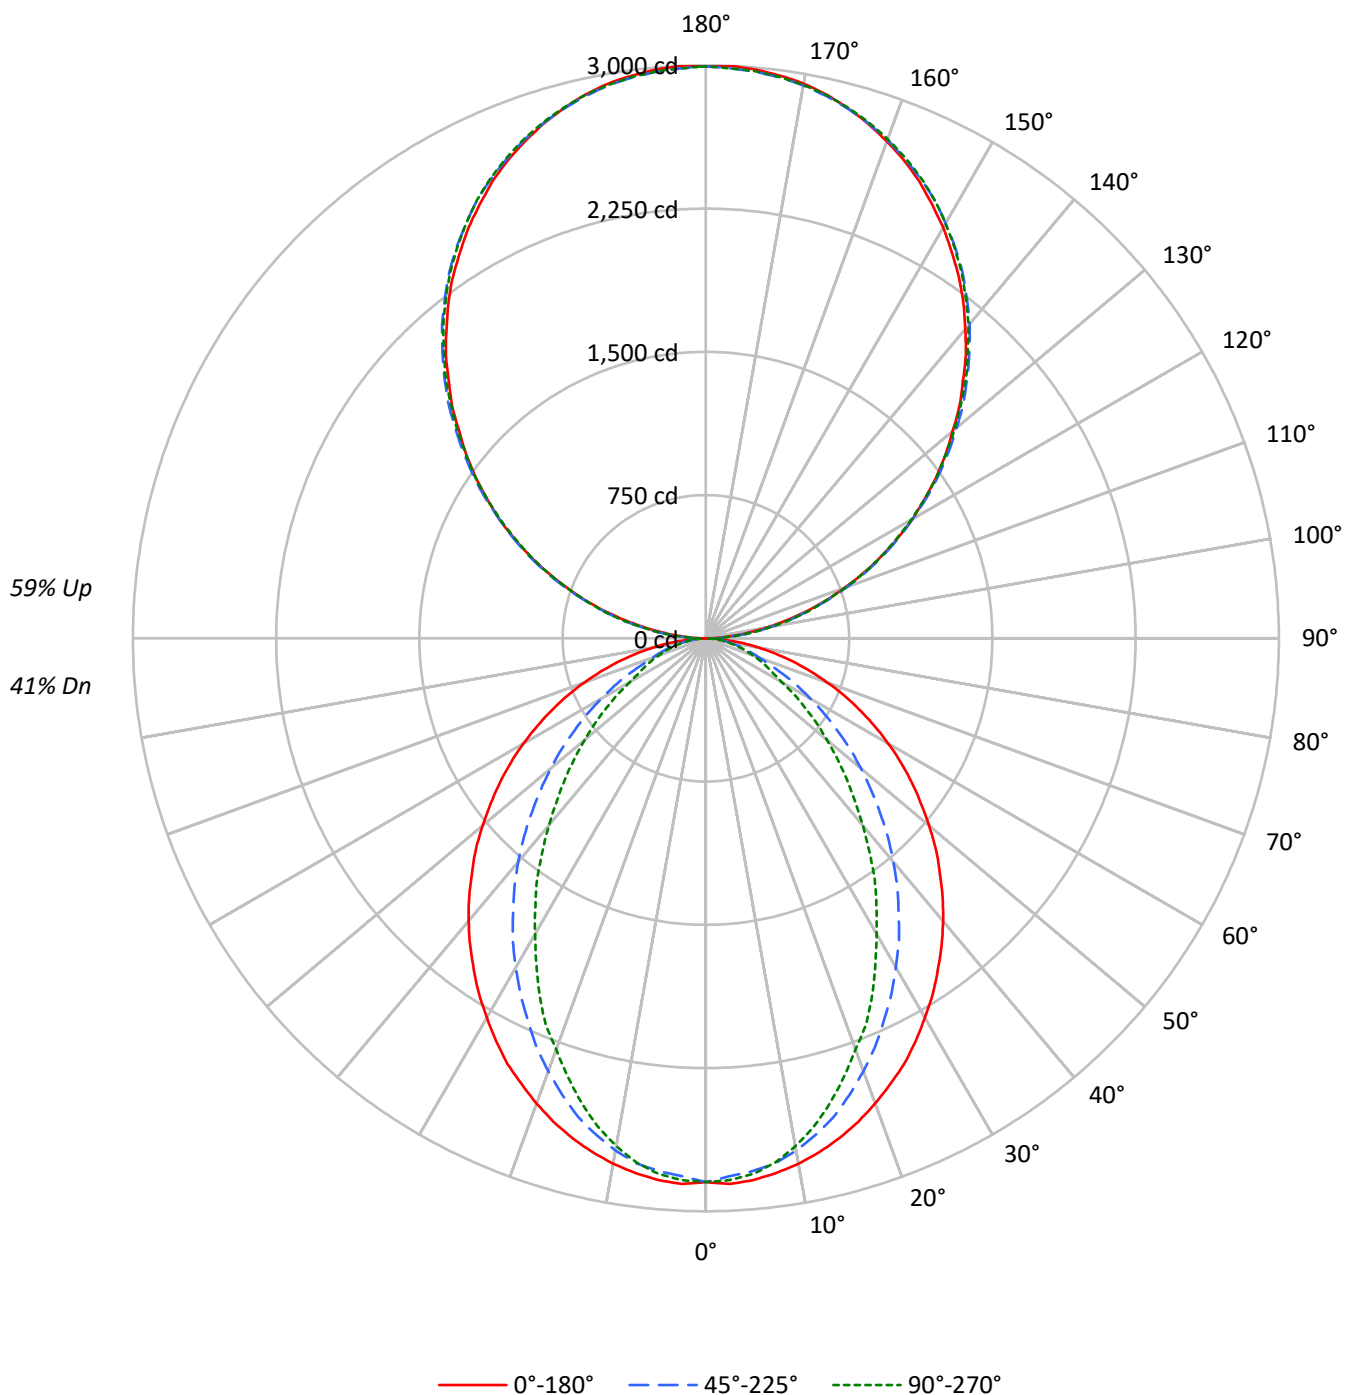

TEST NUMBER: P920398

CATALOG NUMBER: DFN2DIP-SQ4F0-080D110US935-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41
2	88	81	75	70	80	74	69	65	61	58	55	49	47	45	38	37	35
3	80	71	64	59	73	65	59	55	54	50	46	44	41	38	34	32	31
4	74	63	56	50	67	58	52	47	48	44	40	39	36	33	31	29	27
5	68	57	49	43	62	52	45	40	43	38	34	36	32	29	28	26	23
6	63	51	43	37	57	47	40	35	39	34	30	32	28	25	26	23	21
7	58	46	38	33	53	42	36	31	36	31	27	29	26	23	23	21	19
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	22	19	17
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1998	1998	1998
5°	2001	1966	1979
10°	1981	1928	1915
15°	1954	1865	1816
20°	1918	1777	1694
25°	1880	1679	1577
30°	1831	1578	1428
35°	1782	1470	1296
40°	1733	1358	1146
45°	1675	1234	1010
50°	1616	1108	876
55°	1554	974	748
60°	1482	834	616
65°	1399	691	555
70°	1299	558	504
75°	1173	492	459
80°	991	415	400
85°	690	279	305

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2358 cd/sqm

TEST NUMBER: P920398

CATALOG NUMBER: DFN2DIP-SQ4F0-080D110US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.8	1.9
10°-20°	732.4	5.1
20°-30°	1028.3	7.2
30°-40°	1120.9	7.9
40°-50°	1030.3	7.2
50°-60°	809.1	5.7
60°-70°	526.6	3.7
70°-80°	271.1	1.9
80°-90°	77.7	0.5
90°-100°	185.3	1.3
100°-110°	588.9	4.1
110°-120°	1007.8	7.1
120°-130°	1325.4	9.3
130°-140°	1487.7	10.5
140°-150°	1458.9	10.2
150°-160°	1223.8	8.6
160°-170°	811.6	5.7
170°-180°	283.7	2.0
0°-30°	2027.6	14.2
0°-40°	3148.5	22.1
0°-60°	4987.8	35.0
0°-90°	5863.3	41.2
90°-120°	1782.1	12.5
90°-150°	6054.2	42.5
90°-180°	8373.0	58.8
0°-180°	14236.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2847	2847	2847	2847	2847	
5°	2847	2834	2800	2824	2816	270
15°	2708	2679	2592	2543	2517	763
25°	2458	2375	2205	2100	2061	1130
35°	2118	1986	1760	1597	1540	1326
45°	1731	1559	1288	1105	1043	1337
55°	1316	1116	837	683	634	1176
65°	889	680	448	361	353	881
75°	474	294	206	188	186	501
85°	111	57	49	49	49	127
90°	3	32	88	83	86	14
95°	132	157	162	162	157	147
105°	544	551	556	561	561	574
115°	1011	1026	1021	1019	1011	1000
125°	1471	1494	1486	1478	1476	1315
135°	1903	1931	1936	1933	1926	1471
145°	2310	2328	2342	2345	2335	1443
155°	2641	2648	2657	2669	2661	1216
165°	2873	2871	2871	2889	2876	811
175°	2990	2983	2977	2995	2980	284
180°	2995	2995	2995	2995	2995	

TEST NUMBER: P920398

CATALOG NUMBER: DFN2DIP-SQ4F0-080D110US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2846.8	2846.8	2846.8	2846.8	2846.8
2.5°	2859.6	2846.8	2818.4	2844.3	2839.1
5°	2846.8	2834.0	2800.3	2823.6	2815.9
7.5°	2823.6	2808.2	2772.2	2782.3	2769.4
10°	2792.6	2774.7	2723.3	2715.3	2700.0
12.5°	2754.2	2730.9	2661.2	2645.8	2617.4
15°	2707.7	2679.3	2591.8	2542.9	2517.1
17.5°	2653.5	2612.3	2504.0	2447.5	2406.1
20°	2591.8	2540.1	2411.4	2347.2	2290.3
22.5°	2524.8	2465.5	2316.0	2228.5	2189.9
25°	2457.8	2375.3	2205.3	2099.8	2061.0
27.5°	2378.0	2290.3	2102.2	1981.2	1921.8
30°	2293.0	2194.9	1988.8	1857.6	1787.9
32.5°	2210.4	2091.9	1880.8	1726.1	1661.6
35°	2117.8	1986.3	1759.7	1597.4	1540.5
37.5°	2027.6	1885.8	1646.3	1468.3	1404.1
40°	1932.3	1777.8	1527.7	1344.8	1277.8
42.5°	1834.4	1669.6	1409.3	1218.6	1154.3
45°	1731.3	1558.6	1288.2	1105.1	1043.4
47.5°	1633.5	1450.6	1172.3	989.2	932.6
50°	1525.2	1342.4	1058.9	881.0	827.1
52.5°	1419.4	1226.1	950.6	780.7	731.8
55°	1316.4	1115.5	837.2	682.8	633.9
57.5°	1210.9	1004.8	736.9	592.6	551.3
60°	1102.6	896.6	631.1	499.9	458.7
62.5°	997.1	791.0	541.0	417.4	396.9
65°	888.9	680.0	448.2	360.8	352.8
67.5°	785.8	577.0	360.8	316.8	309.2
70°	677.6	476.7	298.8	273.0	262.7
72.5°	574.5	383.7	249.9	229.4	224.1
75°	474.0	293.6	206.1	188.0	185.6
77.5°	373.7	208.5	162.4	152.0	146.8
80°	280.7	149.6	123.6	113.4	113.4
82.5°	195.7	100.6	85.0	79.8	79.8
85°	110.7	56.6	48.9	48.9	48.9
87.5°	41.2	20.5	20.5	18.1	18.1
90°	2.7	32.5	88.5	83.1	85.8
92.5°	56.0	75.9	78.5	81.3	81.3
95°	131.8	157.1	161.6	161.6	157.1
97.5°	219.5	242.9	252.9	252.9	252.9
100°	320.5	341.3	348.5	348.5	345.9
102.5°	427.1	442.5	452.5	455.1	452.5
105°	543.6	550.9	556.3	560.8	560.8
107.5°	659.2	670.0	670.0	671.8	659.2
110°	771.2	785.7	785.7	785.7	778.4

TEST NUMBER: P920398

CATALOG NUMBER: DFN2DIP-SQ4F0-080D110US935-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	892.2	907.5	904.8	897.6	892.2
115°	1011.4	1025.8	1021.3	1018.6	1011.4
117.5°	1129.7	1149.5	1136.9	1129.7	1122.5
120°	1248.9	1268.8	1248.9	1248.9	1240.8
122.5°	1357.3	1382.5	1369.8	1362.6	1357.3
125°	1471.0	1493.6	1486.3	1478.2	1475.5
127.5°	1582.1	1610.1	1600.2	1589.3	1582.1
130°	1685.9	1718.5	1713.9	1708.5	1698.6
132.5°	1802.4	1827.7	1829.5	1816.9	1809.6
135°	1902.6	1930.6	1936.0	1933.4	1926.1
137.5°	2014.6	2037.2	2041.7	2039.9	2029.1
140°	2113.1	2135.6	2148.3	2148.3	2138.4
142.5°	2214.2	2236.8	2244.0	2246.7	2236.8
145°	2309.9	2328.0	2342.4	2345.1	2335.2
147.5°	2395.7	2418.3	2429.1	2433.6	2423.7
150°	2484.2	2499.6	2509.5	2517.6	2509.5
152.5°	2562.8	2578.1	2590.7	2600.7	2590.7
155°	2641.4	2648.5	2656.7	2669.4	2661.2
157.5°	2709.0	2714.5	2718.9	2737.0	2724.4
160°	2769.6	2775.0	2777.7	2793.1	2782.2
162.5°	2825.5	2825.5	2828.3	2845.4	2832.8
165°	2873.4	2870.7	2870.7	2888.7	2876.1
167.5°	2916.7	2908.6	2908.6	2926.7	2914.0
170°	2949.3	2942.0	2939.4	2957.4	2942.0
172.5°	2971.8	2964.6	2961.9	2980.0	2964.6
175°	2989.9	2982.7	2977.2	2995.3	2980.0
177.5°	2999.8	2992.6	2987.1	3002.6	2987.1
180°	2995.3	2995.3	2995.3	2995.3	2995.3

TEST NUMBER: P920398

CATALOG NUMBER: DFN2DIP-SQ4F0-080D110US935-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.68	9.44	9.71	10.48	11.87	4.64	5.40	5.68	6.44	7.83
	3H	10.36	11.04	11.40	12.08	13.50	5.82	6.51	6.87	7.55	8.97
	4H	10.96	11.61	12.02	12.66	14.08	6.27	6.92	7.33	7.97	9.39
	6H	11.39	11.98	12.45	13.03	14.47	6.59	7.18	7.66	8.24	9.67
	8H	11.51	12.08	12.58	13.15	14.57	6.68	7.24	7.75	8.31	9.74
	12H	11.57	12.11	12.65	13.17	14.62	6.72	7.26	7.80	8.32	9.77
4H	2H	8.69	9.34	9.75	10.38	11.81	5.23	5.88	6.29	6.92	8.35
	3H	10.52	11.05	11.59	12.13	13.56	6.57	7.11	7.65	8.19	9.62
	4H	11.21	11.70	12.29	12.77	14.22	7.12	7.61	8.20	8.68	10.14
	6H	11.73	12.15	12.81	13.24	14.69	7.54	7.96	8.62	9.05	10.50
	8H	11.90	12.30	12.99	13.38	14.84	7.66	8.06	8.75	9.14	10.61
	12H	12.00	12.35	13.10	13.45	14.92	7.73	8.08	8.83	9.18	10.65
8H	4H	11.17	11.57	12.26	12.65	14.11	7.40	7.79	8.48	8.87	10.34
	6H	11.74	12.07	12.85	13.19	14.65	7.92	8.24	9.02	9.37	10.83
	8H	11.96	12.25	13.07	13.35	14.83	8.11	8.39	9.22	9.50	10.98
	12H	12.10	12.35	13.22	13.45	14.97	8.22	8.47	9.34	9.58	11.10
12H	4H	11.12	11.48	12.22	12.57	14.04	7.40	7.76	8.50	8.85	10.32
	6H	11.72	12.00	12.83	13.11	14.59	7.97	8.25	9.08	9.36	10.84
	8H	11.94	12.19	13.05	13.29	14.81	8.17	8.42	9.29	9.53	11.05