

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920407

Luminaire Tested: DFN2DIP-SQ4F0-080D140US935-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P920407  
REPORT IS A COMBINATION OF REPORTS P901710 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-080D140US935-RLLONL  
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 17788.2 lumens  
Efficiency: N/A  
Efficacy: 100.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 177.2  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9954  
Total Harmonic Distortion (THDi): 0.076  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P920407  
CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US935-RLLONL

### Luminous Intensity Polar Plot

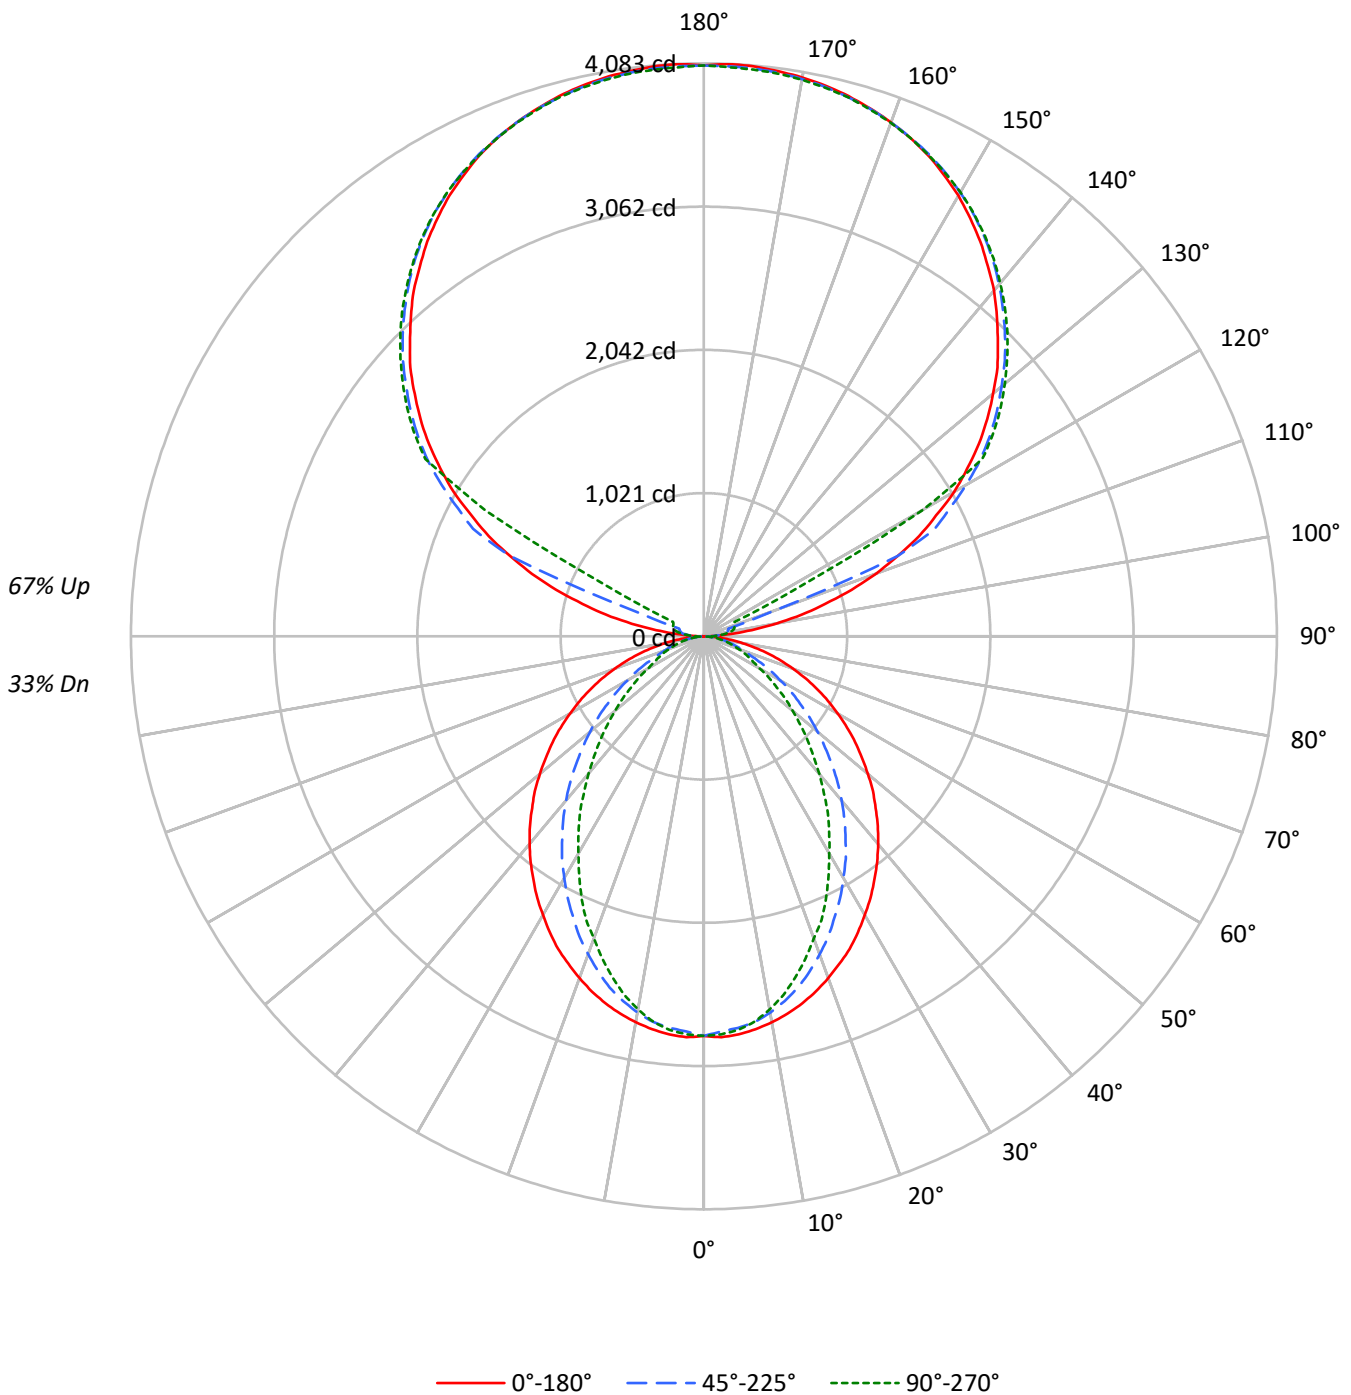



TEST NUMBER: P920407

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US935-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33				33
1	94	90	87	83	85	81	78	76	65	63	61	50	49	48	36	35	35	28				28
2	86	79	73	68	77	72	67	62	57	54	51	44	42	40	32	31	30	24				24
3	79	70	63	57	71	63	57	53	51	47	43	39	37	34	29	27	26	21				21
4	72	62	54	49	65	56	50	45	45	41	37	35	32	30	26	24	22	18				18
5	66	55	47	42	59	50	43	38	41	36	32	32	28	26	24	21	20	16				16
6	61	49	42	36	55	45	38	33	37	32	28	29	25	23	21	19	17	14				14
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	17	16	13				13
8	52	41	33	28	47	37	31	26	30	25	22	24	21	18	18	16	14	12				12
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13	10				10
10	45	34	27	22	41	31	25	21	26	21	18	20	17	15	16	13	12	10				10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1998	1998	1998
5°	2001	1966	1979
10°	1981	1928	1915
15°	1954	1865	1816
20°	1918	1777	1694
25°	1880	1679	1577
30°	1831	1578	1428
35°	1782	1470	1296
40°	1733	1358	1146
45°	1675	1234	1010
50°	1616	1108	876
55°	1554	974	748
60°	1482	834	616
65°	1399	691	555
70°	1299	558	504
75°	1173	492	459
80°	991	415	400
85°	690	279	305

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2182 cd/sqm



TEST NUMBER: P920407

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US935-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	266.8	1.5
10°-20°	732.4	4.1
20°-30°	1028.3	5.8
30°-40°	1120.9	6.3
40°-50°	1030.3	5.8
50°-60°	809.1	4.5
60°-70°	526.6	3.0
70°-80°	271.1	1.5
80°-90°	76.4	0.4
90°-100°	134.2	0.8
100°-110°	500.0	2.8
110°-120°	1326.2	7.5
120°-130°	2199.7	12.4
130°-140°	2336.6	13.1
140°-150°	2171.6	12.2
150°-160°	1745.9	9.8
160°-170°	1125.0	6.3
170°-180°	387.2	2.2
0°-30°	2027.6	11.4
0°-40°	3148.5	17.7
0°-60°	4987.8	28.0
0°-90°	5862.0	33.0
90°-120°	1960.4	11.0
90°-150°	8668.2	48.7
90°-180°	11926.0	67.0
0°-180°	17788.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2847	2847	2847	2847	2847	
5°	2847	2834	2800	2824	2816	270
15°	2708	2679	2592	2543	2517	763
25°	2458	2375	2205	2100	2061	1130
35°	2118	1986	1760	1597	1540	1326
45°	1731	1559	1288	1105	1043	1337
55°	1316	1116	837	683	634	1176
65°	889	680	448	361	353	881
75°	474	294	206	188	186	501
85°	111	57	49	49	49	127
90°	3	35	59	74	79	17
95°	191	94	115	130	127	226
105°	895	983	180	212	224	956
115°	1692	1742	1816	453	242	1666
125°	2393	2432	2487	2508	2517	2134
135°	2961	3009	3035	3064	3058	2288
145°	3435	3432	3482	3503	3488	2149
155°	3782	3756	3792	3809	3786	1743
165°	3986	3968	3977	3997	3977	1126
175°	4077	4056	4062	4083	4053	388
180°	4068	4068	4068	4068	4068	



TEST NUMBER: P920407

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US935-RLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2846.8	2846.8	2846.8	2846.8	2846.8
2.5°	2859.6	2846.8	2818.4	2844.3	2839.1
5°	2846.8	2834.0	2800.3	2823.6	2815.9
7.5°	2823.6	2808.2	2772.2	2782.3	2769.4
10°	2792.6	2774.7	2723.3	2715.3	2700.0
12.5°	2754.2	2730.9	2661.2	2645.8	2617.4
15°	2707.7	2679.3	2591.8	2542.9	2517.1
17.5°	2653.5	2612.3	2504.0	2447.5	2406.1
20°	2591.8	2540.1	2411.4	2347.2	2290.3
22.5°	2524.8	2465.5	2316.0	2228.5	2189.9
25°	2457.8	2375.3	2205.3	2099.8	2061.0
27.5°	2378.0	2290.3	2102.2	1981.2	1921.8
30°	2293.0	2194.9	1988.8	1857.6	1787.9
32.5°	2210.4	2091.9	1880.8	1726.1	1661.6
35°	2117.8	1986.3	1759.7	1597.4	1540.5
37.5°	2027.6	1885.8	1646.3	1468.3	1404.1
40°	1932.3	1777.8	1527.7	1344.8	1277.8
42.5°	1834.4	1669.6	1409.3	1218.6	1154.3
45°	1731.3	1558.6	1288.2	1105.1	1043.4
47.5°	1633.5	1450.6	1172.3	989.2	932.6
50°	1525.2	1342.4	1058.9	881.0	827.1
52.5°	1419.4	1226.1	950.6	780.7	731.8
55°	1316.4	1115.5	837.2	682.8	633.9
57.5°	1210.9	1004.8	736.9	592.6	551.3
60°	1102.6	896.6	631.1	499.9	458.7
62.5°	997.1	791.0	541.0	417.4	396.9
65°	888.9	680.0	448.2	360.8	352.8
67.5°	785.8	577.0	360.8	316.8	309.2
70°	677.6	476.7	298.8	273.0	262.7
72.5°	574.5	383.7	249.9	229.4	224.1
75°	474.0	293.6	206.1	188.0	185.6
77.5°	373.7	208.5	162.4	152.0	146.8
80°	280.7	149.6	123.6	113.4	113.4
82.5°	195.7	100.6	85.0	79.8	79.8
85°	110.7	56.6	48.9	48.9	48.9
87.5°	41.2	20.5	20.5	18.1	18.1
90°	2.8	35.3	58.7	73.8	79.4
92.5°	73.8	61.9	70.6	76.5	79.4
95°	191.2	94.0	114.7	129.7	126.6
97.5°	344.3	103.1	150.0	159.0	161.9
100°	521.2	117.8	167.8	191.2	197.2
102.5°	715.1	709.5	173.7	205.9	215.0
105°	894.8	983.3	179.7	211.8	223.7
107.5°	1103.9	1177.2	185.6	217.7	229.6
110°	1304.2	1365.7	515.2	220.9	232.5



TEST NUMBER: P920407

CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US935-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1492.5	1545.3	1495.4	226.5	235.6
115°	1692.5	1742.5	1816.3	453.4	241.5
117.5°	1866.2	1924.9	1975.3	1554.1	783.0
120°	2060.6	2104.6	2157.7	2193.0	1795.6
122.5°	2225.2	2272.4	2331.5	2349.0	2352.2
125°	2393.1	2431.5	2487.4	2508.0	2516.8
127.5°	2546.1	2587.4	2631.7	2661.1	2663.9
130°	2690.4	2737.7	2769.8	2802.4	2799.5
132.5°	2837.7	2876.1	2908.3	2934.8	2932.0
135°	2961.4	3008.6	3034.8	3064.5	3058.5
137.5°	3090.7	3126.0	3155.7	3185.1	3176.4
140°	3217.3	3241.1	3273.2	3299.8	3285.1
142.5°	3323.5	3344.1	3382.3	3405.7	3391.0
145°	3435.4	3432.2	3482.2	3502.9	3488.2
147.5°	3532.2	3523.5	3573.5	3588.1	3576.6
150°	3626.6	3605.9	3653.1	3670.6	3656.0
152.5°	3705.9	3682.5	3726.6	3744.4	3723.7
155°	3782.4	3756.3	3791.6	3809.1	3785.6
157.5°	3844.4	3820.9	3847.5	3868.1	3844.4
160°	3897.5	3879.7	3897.5	3915.0	3894.4
162.5°	3944.3	3926.8	3941.6	3962.1	3935.6
165°	3985.6	3968.1	3976.9	3997.4	3976.9
167.5°	4018.1	4000.3	4009.3	4030.0	4003.4
170°	4044.6	4026.8	4032.7	4053.4	4026.8
172.5°	4062.1	4044.6	4050.6	4071.2	4044.6
175°	4076.8	4056.2	4062.1	4082.8	4053.4
177.5°	4082.8	4062.1	4065.3	4085.9	4059.3
180°	4068.0	4068.0	4068.0	4068.0	4068.0



TEST NUMBER: P920407  
 CATALOG NUMBER: DFN2DIP-SQ4F0-080D140US935-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.72	8.43	8.82	9.52	11.02	3.68	4.39	4.78	5.48	6.98
	3H	9.39	10.03	10.50	11.13	12.64	4.86	5.50	5.97	6.59	8.11
	4H	10.00	10.60	11.12	11.70	13.22	5.31	5.91	6.42	7.01	8.53
	6H	10.42	10.97	11.54	12.07	13.61	5.62	6.18	6.75	7.28	8.81
	8H	10.54	11.07	11.67	12.19	13.71	5.71	6.24	6.84	7.35	8.88
	12H	10.60	11.10	11.74	12.21	13.76	5.75	6.25	6.88	7.36	8.91
4H	2H	7.73	8.33	8.85	9.43	10.95	4.27	4.87	5.39	5.97	7.49
	3H	9.55	10.05	10.68	11.17	12.71	5.61	6.10	6.73	7.23	8.76
	4H	10.24	10.70	11.37	11.81	13.37	6.15	6.61	7.28	7.72	9.28
	6H	10.75	11.14	11.89	12.28	13.83	6.56	6.96	7.70	8.09	9.64
	8H	10.93	11.29	12.06	12.42	13.98	6.69	7.06	7.83	8.19	9.75
	12H	11.02	11.35	12.17	12.49	14.06	6.75	7.08	7.90	8.22	9.79
8H	4H	10.20	10.56	11.34	11.69	13.26	6.42	6.79	7.56	7.92	9.48
	6H	10.76	11.07	11.92	12.24	13.80	6.94	7.24	8.10	8.41	9.97
	8H	10.98	11.25	12.15	12.40	13.98	7.13	7.39	8.29	8.55	10.12
	12H	11.12	11.35	12.29	12.50	14.11	7.24	7.48	8.41	8.62	10.24
12H	4H	10.14	10.48	11.30	11.62	13.18	6.42	6.75	7.58	7.90	9.46
	6H	10.74	11.00	11.90	12.16	13.73	6.99	7.25	8.15	8.40	9.98
	8H	10.96	11.19	12.12	12.34	13.95	7.19	7.43	8.36	8.58	10.19