

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920522

Luminaire Tested: DFN2DIP-SQ4F0-120D060US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920522
REPORT IS A COMBINATION OF REPORTS P900072 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-120D060US935-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13354.1 lumens
Efficiency: N/A
Efficacy: 82.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 162.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920522

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US935-RLLFLL

Luminous Intensity Polar Plot

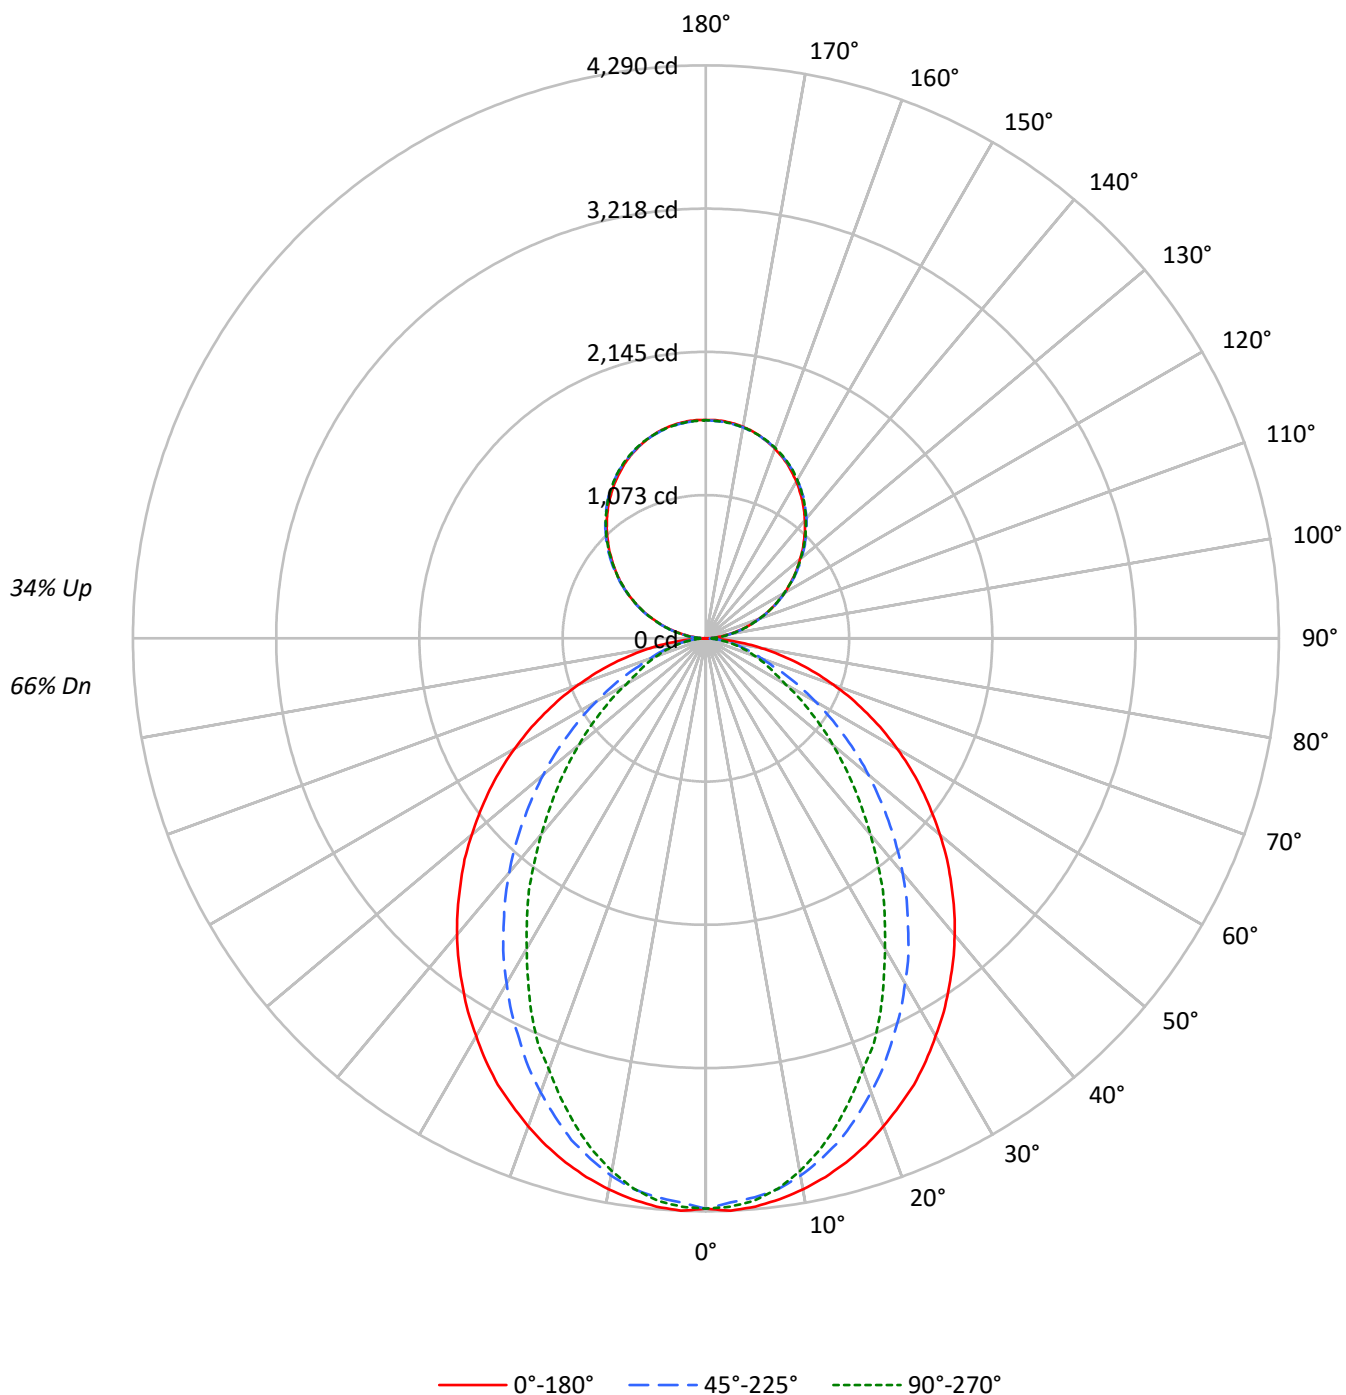

TEST NUMBER: P920522

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US935-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2996	2996	2996
5°	3001	2949	2969
10°	2971	2892	2873
15°	2930	2797	2724
20°	2876	2666	2542
25°	2821	2519	2365
30°	2746	2368	2141
35°	2673	2205	1945
40°	2599	2037	1719
45°	2513	1851	1514
50°	2424	1662	1314
55°	2331	1461	1122
60°	2223	1250	925
65°	2099	1036	833
70°	1949	836	755
75°	1760	739	689
80°	1486	621	600
85°	1035	418	457

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2513 cd/sqm

TEST NUMBER: P920522

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	400.2	3.0
10°-20°	1098.7	8.2
20°-30°	1542.5	11.6
30°-40°	1681.4	12.6
40°-50°	1545.4	11.6
50°-60°	1213.7	9.1
60°-70°	790.0	5.9
70°-80°	406.7	3.0
80°-90°	108.4	0.8
90°-100°	101.1	0.8
100°-110°	321.2	2.4
110°-120°	549.7	4.1
120°-130°	723.0	5.4
130°-140°	811.5	6.1
140°-150°	795.8	6.0
150°-160°	667.5	5.0
160°-170°	442.7	3.3
170°-180°	154.7	1.2
0°-30°	3041.3	22.8
0°-40°	4722.7	35.4
0°-60°	7481.7	56.0
0°-90°	8786.8	65.8
90°-120°	972.0	7.3
90°-150°	3302.3	24.7
90°-180°	4567.0	34.2
0°-180°	13354.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4270	4270	4270	4270	4270	
5°	4270	4251	4200	4235	4224	405
15°	4062	4019	3888	3814	3776	1144
25°	3687	3563	3308	3150	3091	1696
35°	3177	2980	2640	2396	2311	1988
45°	2597	2338	1932	1658	1565	2006
55°	1975	1673	1256	1024	951	1764
65°	1333	1020	672	541	529	1322
75°	711	440	309	282	278	752
85°	166	85	73	73	73	191
90°	2	18	48	45	47	13
95°	72	86	88	88	86	80
105°	296	300	303	306	306	313
115°	552	560	557	556	552	546
125°	802	815	811	806	805	717
135°	1038	1053	1056	1055	1051	802
145°	1260	1270	1278	1279	1274	787
155°	1441	1445	1449	1456	1452	663
165°	1567	1566	1566	1576	1569	442
175°	1631	1627	1624	1634	1625	155
180°	1634	1634	1634	1634	1634	

TEST NUMBER: P920522

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4270.2	4270.2	4270.2	4270.2	4270.2
2.5°	4289.5	4270.2	4227.6	4266.5	4258.7
5°	4270.2	4250.9	4200.5	4235.3	4223.9
7.5°	4235.3	4212.3	4158.3	4173.4	4154.1
10°	4189.0	4162.0	4084.8	4073.0	4050.0
12.5°	4131.2	4096.4	3991.8	3968.9	3926.2
15°	4061.5	4018.9	3887.7	3814.2	3775.7
17.5°	3980.3	3918.4	3756.0	3671.2	3609.3
20°	3887.7	3810.2	3617.1	3520.7	3435.4
22.5°	3787.2	3698.2	3474.0	3342.7	3285.0
25°	3686.8	3562.9	3307.9	3149.6	3091.4
27.5°	3567.0	3435.4	3153.3	2971.7	2882.7
30°	3439.5	3292.4	2983.2	2786.4	2681.8
32.5°	3315.7	3137.7	2821.2	2589.2	2492.4
35°	3176.7	2979.5	2639.6	2396.1	2310.7
37.5°	3041.4	2828.6	2469.4	2202.5	2106.2
40°	2898.3	2666.7	2291.5	2017.2	1916.8
42.5°	2751.5	2504.3	2114.0	1827.8	1731.5
45°	2596.9	2337.9	1932.3	1657.7	1564.9
47.5°	2450.1	2175.9	1758.5	1483.8	1398.9
50°	2287.8	2013.5	1588.4	1321.5	1240.7
52.5°	2129.2	1839.3	1426.0	1171.0	1097.6
55°	1974.6	1673.3	1255.9	1024.2	950.8
57.5°	1816.3	1507.2	1105.3	888.9	827.0
60°	1654.0	1344.8	946.7	749.9	688.0
62.5°	1495.7	1186.5	811.4	626.1	595.3
65°	1333.3	1020.1	672.4	541.2	529.3
67.5°	1178.8	865.5	541.2	475.2	463.7
70°	1016.4	715.1	448.1	409.6	394.0
72.5°	861.9	575.7	374.7	344.0	336.2
75°	710.9	440.3	309.2	282.1	278.4
77.5°	560.5	312.8	243.6	228.0	220.2
80°	421.1	224.3	185.3	170.1	170.1
82.5°	293.6	150.8	127.5	119.7	119.7
85°	166.1	84.9	73.4	73.4	73.4
87.5°	61.9	30.7	30.7	27.0	27.0
90°	1.5	17.7	48.3	45.3	46.8
92.5°	30.6	41.4	42.9	44.3	44.3
95°	71.9	85.7	88.2	88.2	85.7
97.5°	119.7	132.5	137.9	137.9	137.9
100°	174.9	186.1	190.1	190.1	188.6
102.5°	233.0	241.3	246.8	248.2	246.8
105°	296.5	300.5	303.4	305.9	305.9
107.5°	359.6	365.5	365.5	366.4	359.6
110°	420.7	428.5	428.5	428.5	424.6



TEST NUMBER: P920522

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US935-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	486.6	495.0	493.5	489.6	486.6
115°	551.6	559.6	557.1	555.6	551.6
117.5°	616.2	627.1	620.1	616.2	612.3
120°	681.2	692.1	681.2	681.2	676.7
122.5°	740.3	754.1	747.2	743.3	740.3
125°	802.4	814.7	810.7	806.3	804.9
127.5°	863.0	878.2	872.8	866.9	863.0
130°	919.6	937.4	934.9	931.9	926.5
132.5°	983.2	996.9	997.9	991.0	987.0
135°	1037.8	1053.1	1056.0	1054.6	1050.6
137.5°	1098.9	1111.2	1113.7	1112.7	1106.8
140°	1152.6	1164.9	1171.8	1171.8	1166.4
142.5°	1207.7	1220.0	1224.0	1225.5	1220.0
145°	1260.0	1269.8	1277.7	1279.2	1273.8
147.5°	1306.7	1319.0	1325.0	1327.4	1322.0
150°	1355.0	1363.4	1368.8	1373.2	1368.8
152.5°	1397.8	1406.3	1413.2	1418.6	1413.2
155°	1440.7	1444.7	1449.1	1456.0	1451.6
157.5°	1477.6	1480.7	1483.1	1493.0	1486.1
160°	1510.7	1513.6	1515.1	1523.4	1517.6
162.5°	1541.2	1541.2	1542.6	1552.0	1545.1
165°	1567.3	1565.8	1565.8	1575.7	1568.8
167.5°	1591.0	1586.6	1586.6	1596.4	1589.5
170°	1608.7	1604.7	1603.3	1613.1	1604.7
172.5°	1621.0	1617.0	1615.6	1625.4	1617.0
175°	1630.8	1626.9	1623.9	1633.8	1625.4
177.5°	1636.2	1632.4	1629.4	1637.7	1629.4
180°	1633.8	1633.8	1633.8	1633.8	1633.8

TEST NUMBER: P920522

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US935-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.33	13.31	13.15	14.14	15.17	8.29	9.27	9.11	10.10	11.13
	3H	14.03	14.90	14.85	15.74	16.80	9.49	10.37	10.32	11.21	12.27
	4H	14.64	15.47	15.49	16.32	17.39	9.95	10.78	10.80	11.63	12.70
	6H	15.08	15.84	15.93	16.69	17.78	10.28	11.04	11.14	11.90	12.98
	8H	15.21	15.93	16.08	16.81	17.89	10.38	11.10	11.24	11.97	13.06
	12H	15.28	15.97	16.15	16.84	17.94	10.42	11.11	11.30	11.98	13.09
4H	2H	12.37	13.19	13.22	14.04	15.11	8.91	9.73	9.76	10.58	11.65
	3H	14.22	14.90	15.08	15.78	16.87	10.27	10.96	11.14	11.84	12.93
	4H	14.92	15.54	15.79	16.42	17.53	10.83	11.45	11.70	12.33	13.44
	6H	15.44	15.98	16.33	16.89	18.00	11.26	11.79	12.15	12.70	13.81
	8H	15.63	16.13	16.52	17.03	18.15	11.39	11.89	12.28	12.79	13.92
	12H	15.73	16.18	16.64	17.10	18.23	11.46	11.91	12.37	12.83	13.96
8H	4H	14.90	15.40	15.79	16.30	17.42	11.12	11.62	12.01	12.52	13.65
	6H	15.47	15.89	16.39	16.83	17.95	11.65	12.06	12.57	13.00	14.13
	8H	15.69	16.06	16.62	16.99	18.14	11.84	12.21	12.77	13.14	14.28
	12H	15.84	16.16	16.77	17.09	18.28	11.97	12.29	12.90	13.21	14.41
12H	4H	14.85	15.31	15.77	16.22	17.36	11.13	11.58	12.04	12.50	13.63
	6H	15.45	15.82	16.38	16.75	17.89	11.70	12.06	12.63	13.00	14.14
	8H	15.68	16.00	16.61	16.93	18.12	11.92	12.24	12.85	13.16	14.36

END OF REPORT