

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920564

Luminaire Tested: DFN2DIP-SQ4F0-140D080US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920564
REPORT IS A COMBINATION OF REPORTS P900109 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D080US935-FLLFLL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18029.3 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 203.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920564

CATALOG NUMBER: DFN2DIP-SQ4F0-140D080US935-FLLFLL

Luminous Intensity Polar Plot

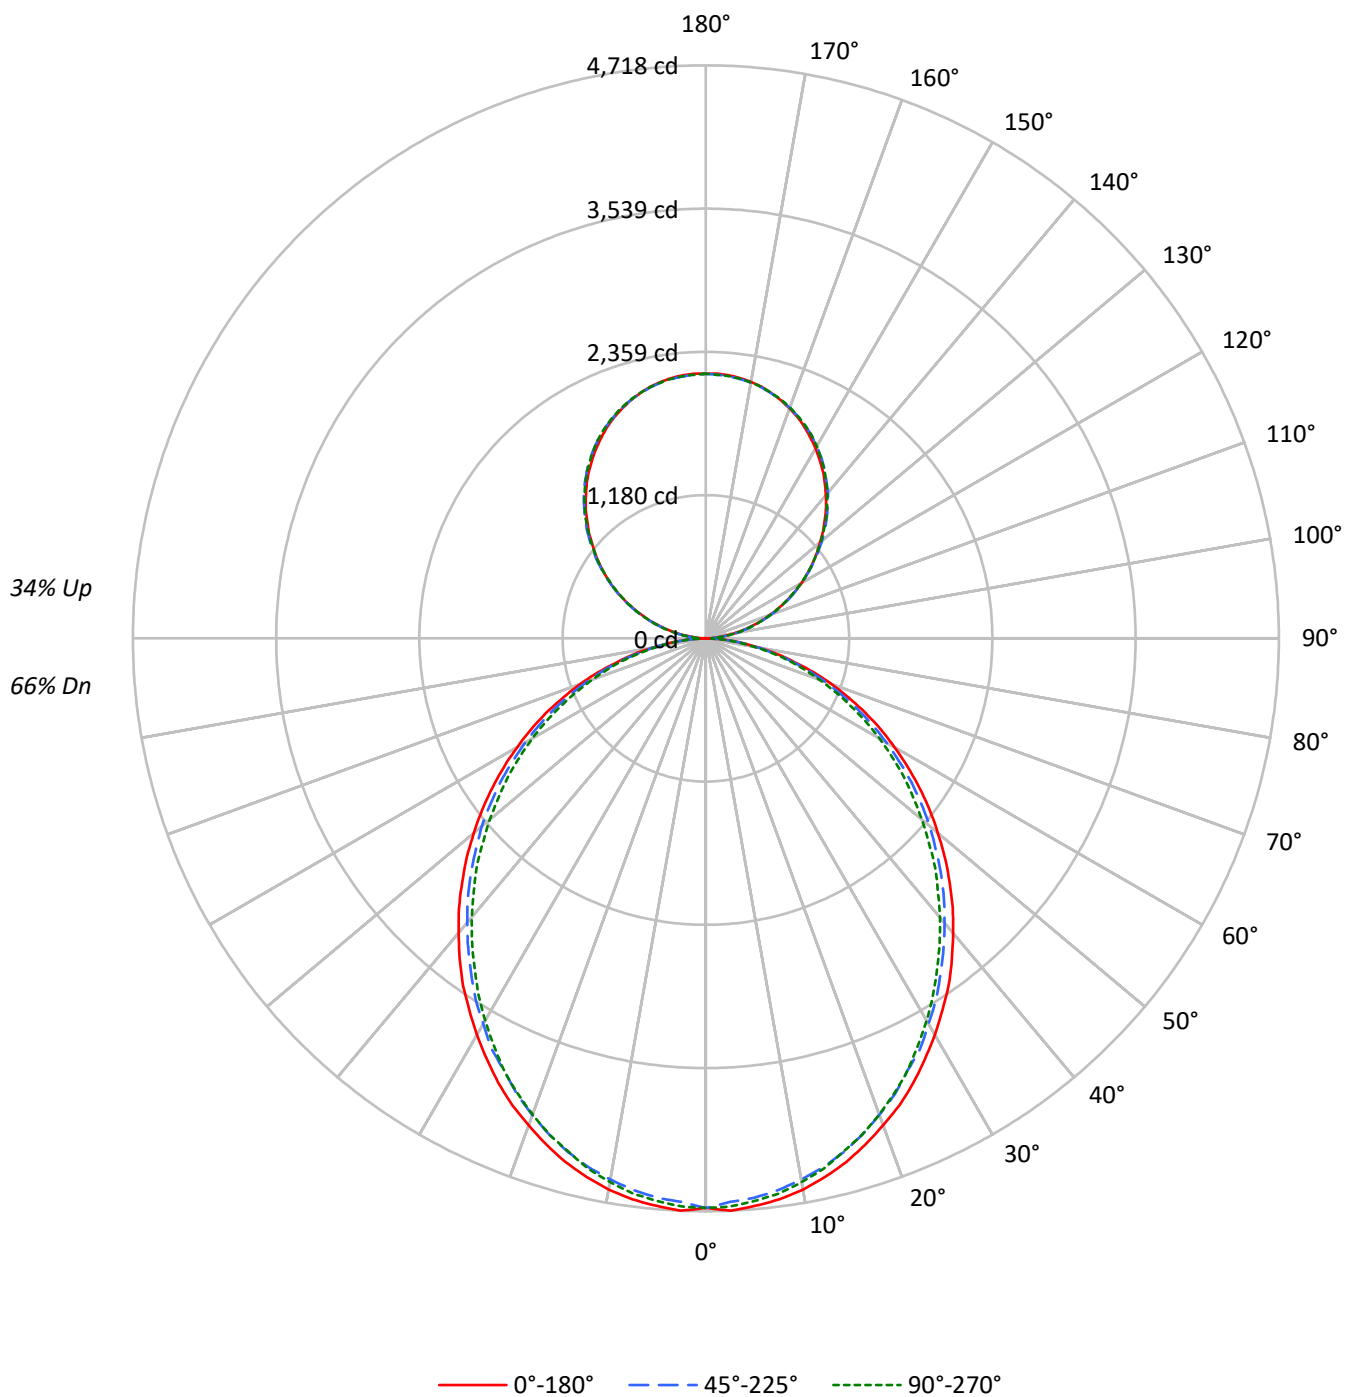

TEST NUMBER: P920564

CATALOG NUMBER: DFN2DIP-SQ4F0-140D080US935-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	101	97	93	89	95	91	88	85	81	78	76	72	70	68	63	61	60
2	92	85	78	73	87	80	74	70	71	67	63	63	60	57	55	53	51
3	84	75	67	61	79	70	64	58	63	57	53	56	51	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	32
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	25
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	49	38	31	26	34	28	24	31	26	22	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3291	3291	3291
5°	3296	3246	3268
10°	3269	3203	3225
15°	3221	3151	3156
20°	3156	3078	3087
25°	3092	2991	3006
30°	3011	2910	2902
35°	2934	2815	2793
40°	2839	2718	2690
45°	2745	2622	2584
50°	2642	2520	2461
55°	2534	2403	2348
60°	2412	2264	2219
65°	2279	2120	2066
70°	2110	1944	1903
75°	1875	1734	1753
80°	1593	1467	1464
85°	1151	1004	984

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2745 cd/sqm

TEST NUMBER: P920564

CATALOG NUMBER: DFN2DIP-SQ4F0-140D080US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	441.4	2.4
10°-20°	1242.1	6.9
20°-30°	1825.4	10.1
30°-40°	2120.0	11.8
40°-50°	2117.4	11.7
50°-60°	1846.3	10.2
60°-70°	1364.8	7.6
70°-80°	772.2	4.3
80°-90°	210.0	1.2
90°-100°	134.8	0.7
100°-110°	428.3	2.4
110°-120°	733.0	4.1
120°-130°	964.0	5.3
130°-140°	1082.0	6.0
140°-150°	1061.0	5.9
150°-160°	890.1	4.9
160°-170°	590.3	3.3
170°-180°	206.3	1.1
0°-30°	3508.9	19.5
0°-40°	5628.9	31.2
0°-60°	9592.6	53.2
0°-90°	11939.6	66.2
90°-120°	1296.1	7.2
90°-150°	4403.1	24.4
90°-180°	6090.0	33.8
0°-180°	18029.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4690	4690	4690	4690	4690	
5°	4690	4672	4623	4659	4650	445
15°	4465	4438	4379	4398	4375	1257
25°	4041	4005	3928	3937	3928	1859
35°	3486	3441	3369	3342	3319	2177
45°	2837	2806	2738	2688	2670	2189
55°	2147	2120	2066	2012	1989	1920
65°	1448	1421	1376	1335	1312	1432
75°	758	749	726	699	708	809
85°	185	180	176	162	158	206
90°	2	24	64	60	62	17
95°	96	114	118	118	114	107
105°	395	401	405	408	408	417
115°	736	746	743	741	736	728
125°	1070	1086	1081	1075	1073	956
135°	1384	1404	1408	1406	1401	1070
145°	1680	1693	1704	1706	1698	1050
155°	1921	1926	1932	1941	1935	884
165°	2090	2088	2088	2101	2092	590
175°	2174	2169	2165	2178	2167	207
180°	2178	2178	2178	2178	2178	

TEST NUMBER: P920564

CATALOG NUMBER: DFN2DIP-SQ4F0-140D080US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4690.3	4690.3	4690.3	4690.3	4690.3
2.5°	4717.5	4695.0	4645.3	4690.3	4681.7
5°	4690.3	4672.5	4622.8	4658.7	4650.1
7.5°	4658.7	4631.9	4582.1	4618.5	4609.4
10°	4609.4	4577.8	4523.8	4559.7	4546.2
12.5°	4541.4	4514.6	4460.6	4483.0	4474.0
15°	4464.9	4438.1	4379.2	4397.5	4374.9
17.5°	4370.2	4343.4	4284.5	4307.0	4284.5
20°	4266.3	4239.6	4176.4	4189.8	4172.1
22.5°	4162.9	4122.3	4063.4	4063.4	4054.4
25°	4040.9	4005.0	3928.5	3937.1	3928.5
27.5°	3905.5	3874.0	3815.6	3802.2	3779.7
30°	3770.6	3734.2	3666.7	3653.4	3635.1
32.5°	3626.1	3599.3	3527.0	3499.8	3481.5
35°	3486.4	3441.4	3369.1	3341.9	3319.3
37.5°	3328.4	3287.8	3215.5	3184.0	3161.4
40°	3166.2	3129.9	3057.6	3017.5	2999.2
42.5°	3008.3	2972.0	2900.2	2854.7	2827.9
45°	2837.0	2805.5	2737.5	2688.2	2670.0
47.5°	2670.0	2638.4	2566.2	2516.4	2489.7
50°	2494.0	2471.5	2408.3	2345.1	2322.6
52.5°	2322.6	2291.0	2232.7	2182.9	2151.4
55°	2147.1	2119.8	2065.7	2011.6	1989.2
57.5°	1970.9	1948.4	1889.6	1835.6	1817.3
60°	1794.8	1777.2	1714.0	1664.2	1650.8
62.5°	1623.6	1592.0	1547.0	1502.0	1483.8
65°	1447.9	1420.6	1375.7	1335.0	1312.5
67.5°	1267.6	1244.6	1204.4	1172.8	1154.6
70°	1100.5	1082.4	1041.7	1010.1	992.4
72.5°	929.3	911.0	888.5	857.0	843.6
75°	757.5	748.9	725.9	699.1	708.2
77.5°	604.3	586.2	577.0	563.7	550.3
80°	451.2	446.4	437.4	424.0	414.8
82.5°	306.7	306.7	302.4	284.2	284.2
85°	184.7	180.4	176.1	162.2	157.9
87.5°	81.4	72.2	63.2	49.8	44.9
90°	2.0	23.7	64.4	60.4	62.4
92.5°	40.7	55.2	57.2	59.1	59.1
95°	95.9	114.3	117.5	117.5	114.3
97.5°	159.6	176.7	183.9	183.9	183.9
100°	233.2	248.2	253.5	253.5	251.5
102.5°	310.6	321.8	329.0	331.0	329.0
105°	395.4	400.6	404.6	407.9	407.9
107.5°	479.4	487.3	487.3	488.6	479.4
110°	560.9	571.4	571.4	571.4	566.1



TEST NUMBER: P920564

CATALOG NUMBER: DFN2DIP-SQ4F0-140D080US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	648.8	660.0	658.1	652.8	648.8
115°	735.6	746.1	742.8	740.8	735.6
117.5°	821.6	836.0	826.8	821.6	816.3
120°	908.3	922.7	908.3	908.3	902.3
122.5°	987.0	1005.5	996.3	991.0	987.0
125°	1069.8	1086.2	1081.0	1075.0	1073.1
127.5°	1150.6	1171.0	1163.7	1155.9	1150.6
130°	1226.1	1249.7	1246.5	1242.6	1235.4
132.5°	1310.9	1329.2	1330.6	1321.4	1316.1
135°	1383.7	1404.1	1408.1	1406.1	1400.8
137.5°	1465.2	1481.6	1484.9	1483.6	1475.7
140°	1536.8	1553.2	1562.4	1562.4	1555.1
142.5°	1610.3	1626.8	1632.0	1634.0	1626.8
145°	1680.0	1693.1	1703.6	1705.6	1698.3
147.5°	1742.3	1758.8	1766.6	1770.0	1762.7
150°	1806.7	1817.8	1825.1	1831.0	1825.1
152.5°	1863.8	1875.0	1884.2	1891.4	1884.2
155°	1921.0	1926.2	1932.2	1941.3	1935.4
157.5°	1970.2	1974.2	1977.5	1990.5	1981.4
160°	2014.2	2018.2	2020.2	2031.3	2023.4
162.5°	2054.9	2054.9	2056.9	2069.4	2060.2
165°	2089.7	2087.7	2087.7	2100.9	2091.7
167.5°	2121.2	2115.4	2115.4	2128.5	2119.3
170°	2144.9	2139.7	2137.7	2150.9	2139.7
172.5°	2161.4	2156.1	2154.1	2167.2	2156.1
175°	2174.5	2169.2	2165.2	2178.4	2167.2
177.5°	2181.7	2176.4	2172.5	2183.7	2172.5
180°	2178.4	2178.4	2178.4	2178.4	2178.4

TEST NUMBER: P920564

CATALOG NUMBER: DFN2DIP-SQ4F0-140D080US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.80	13.83	13.60	14.65	15.67	12.35	13.38	13.16	14.21	15.23
	3H	14.48	15.40	15.29	16.24	17.28	13.99	14.91	14.80	15.75	16.79
	4H	15.07	15.95	15.91	16.79	17.85	14.58	15.45	15.41	16.30	17.36
	6H	15.49	16.29	16.33	17.14	18.21	14.99	15.79	15.83	16.64	17.71
	8H	15.60	16.36	16.45	17.23	18.31	15.10	15.86	15.95	16.73	17.80
	12H	15.65	16.38	16.51	17.25	18.35	15.14	15.87	16.00	16.74	17.84
4H	2H	13.28	14.15	14.12	15.00	16.06	12.93	13.80	13.76	14.64	15.70
	3H	15.17	15.89	16.02	16.77	17.85	14.76	15.49	15.61	16.36	17.44
	4H	15.89	16.55	16.75	17.43	18.53	15.47	16.13	16.33	17.01	18.11
	6H	16.42	16.99	17.30	17.89	19.00	15.99	16.56	16.87	17.46	18.56
	8H	16.58	17.11	17.46	18.01	19.12	16.14	16.67	17.02	17.57	18.69
	12H	16.66	17.14	17.56	18.05	19.18	16.21	16.69	17.11	17.61	18.73
8H	4H	16.10	16.64	16.98	17.53	18.65	15.72	16.26	16.61	17.15	18.27
	6H	16.74	17.19	17.65	18.12	19.24	16.36	16.81	17.27	17.74	18.86
	8H	16.97	17.36	17.89	18.29	19.43	16.58	16.97	17.50	17.90	19.03
	12H	17.11	17.46	18.03	18.38	19.56	16.70	17.05	17.62	17.97	19.15
12H	4H	16.09	16.58	17.00	17.49	18.61	15.73	16.21	16.63	17.12	18.25
	6H	16.78	17.17	17.69	18.10	19.23	16.40	16.80	17.32	17.73	18.86
	8H	17.03	17.38	17.95	18.30	19.48	16.65	17.00	17.57	17.92	19.10