

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923056

Luminaire Tested: DFN2DIP-SQ4F0-060D120US940-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P923056  
REPORT IS A COMBINATION OF REPORTS P900167 AND P896915  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-060D120US940-FLLFLL  
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14766.7 lumens  
Efficiency: N/A  
Efficacy: 105.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: Semi-Indirect

Input Watts (W): 140.1  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.946  
Total Harmonic Distortion (THDi): 0.132  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P923056  
CATALOG NUMBER: DFN2DIP-SQ4F0-060D120US940-FLLFL

### Luminous Intensity Polar Plot

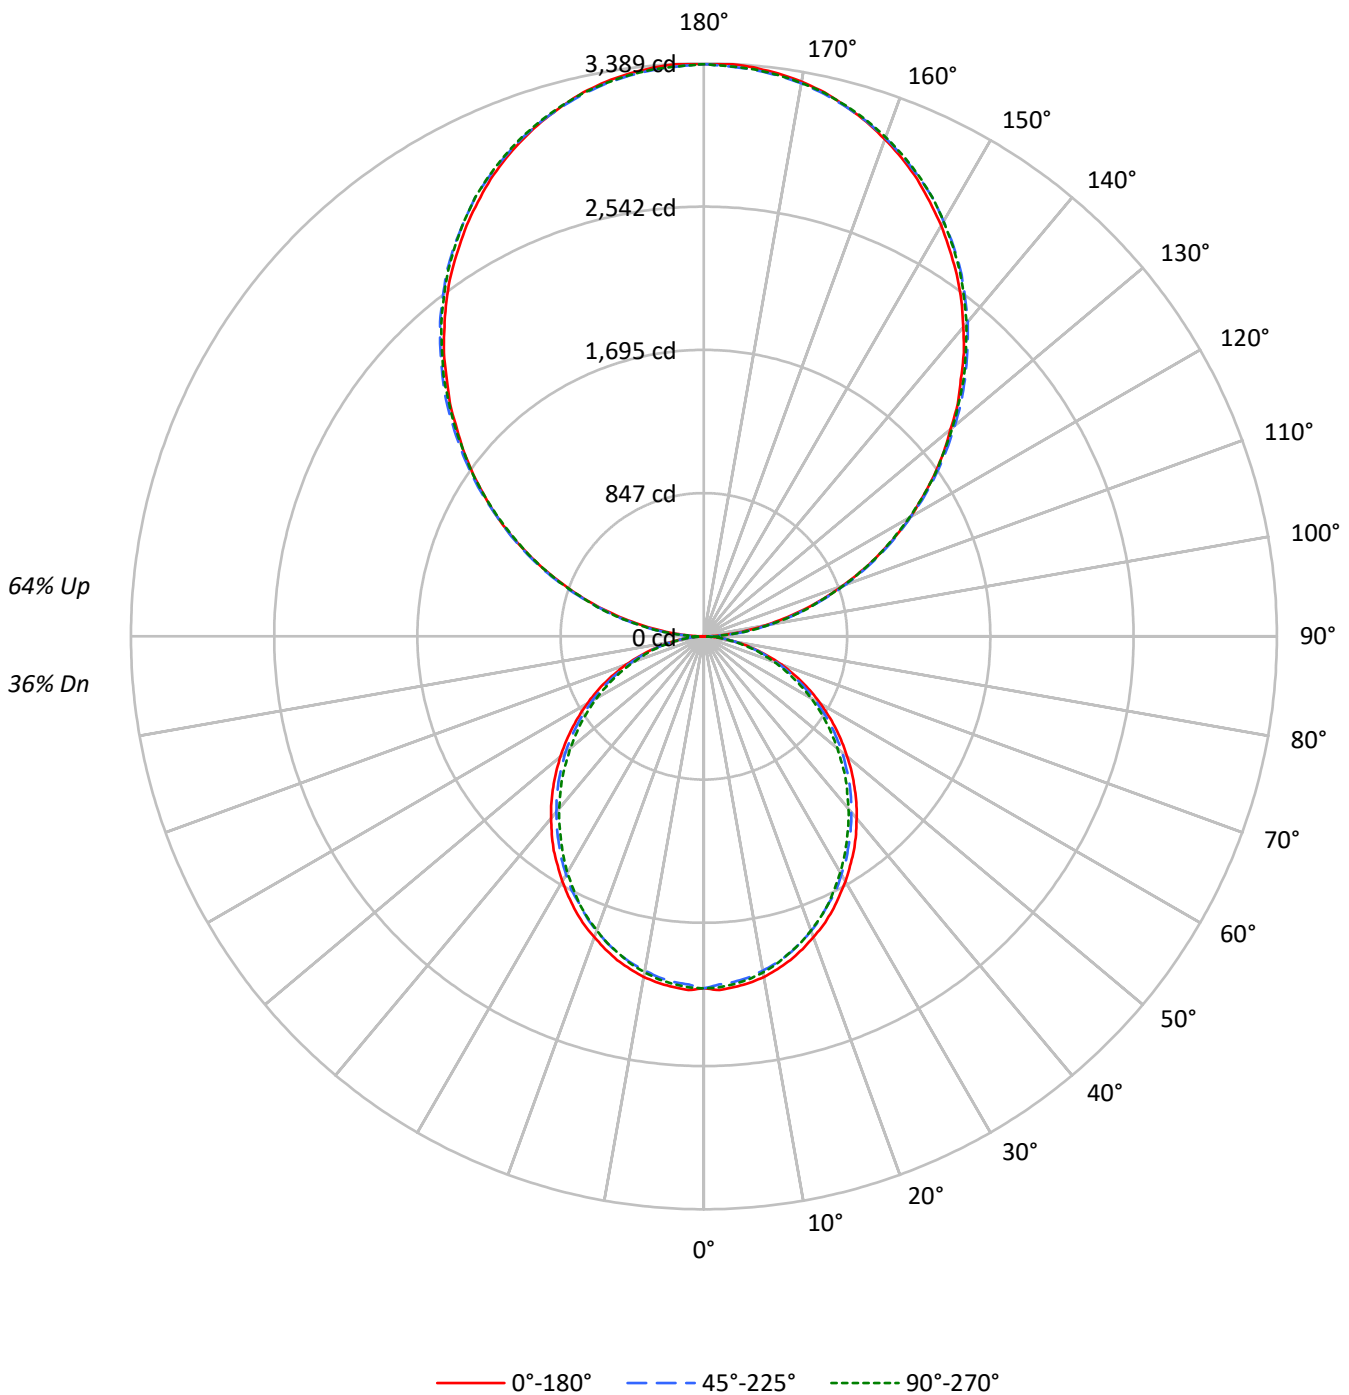



TEST NUMBER: P923056

CATALOG NUMBER: DFN2DIP-SQ4F0-060D120US940-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36				36
1	95	90	87	83	85	82	79	76	66	64	62	52	50	49	38	37	36	30				30
2	86	79	73	68	78	72	66	62	58	54	51	45	43	41	34	32	31	25				25
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26	21				21
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	27	24	22	18				18
5	66	54	47	41	59	50	43	38	40	35	31	32	28	25	24	22	20	16				16
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17	14				14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	20	20	17	15	12				12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11				11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10				10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11	9				9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1461	1461	1461
5°	1463	1441	1451
10°	1451	1422	1431
15°	1430	1399	1401
20°	1401	1366	1370
25°	1372	1328	1334
30°	1336	1292	1288
35°	1302	1249	1240
40°	1260	1207	1194
45°	1219	1164	1147
50°	1173	1119	1092
55°	1125	1067	1042
60°	1071	1005	985
65°	1012	941	917
70°	936	863	844
75°	832	770	778
80°	707	651	650
85°	510	445	437

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2663 cd/sqm



TEST NUMBER: P923056

CATALOG NUMBER: DFN2DIP-SQ4F0-060D120US940-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	195.9	1.3
10°-20°	551.3	3.7
20°-30°	810.2	5.5
30°-40°	941.0	6.4
40°-50°	939.8	6.4
50°-60°	819.5	5.5
60°-70°	605.8	4.1
70°-80°	342.7	2.3
80°-90°	100.1	0.7
90°-100°	209.4	1.4
100°-110°	665.4	4.5
110°-120°	1138.7	7.7
120°-130°	1497.5	10.1
130°-140°	1680.9	11.4
140°-150°	1648.3	11.2
150°-160°	1382.7	9.4
160°-170°	917.0	6.2
170°-180°	320.5	2.2
0°-30°	1557.4	10.5
0°-40°	2498.4	16.9
0°-60°	4257.8	28.8
0°-90°	5306.4	35.9
90°-120°	2013.4	13.6
90°-150°	6840.1	46.3
90°-180°	9460.0	64.1
0°-180°	14766.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2082	2082	2082	2082	2082	
5°	2082	2074	2052	2068	2064	198
15°	1982	1970	1944	1952	1942	558
25°	1794	1778	1744	1748	1744	825
35°	1548	1528	1495	1483	1473	966
45°	1259	1245	1215	1193	1185	972
55°	953	941	917	893	883	852
65°	643	631	611	592	583	635
75°	336	332	322	310	314	359
85°	82	80	78	72	70	91
90°	3	37	100	94	97	14
95°	149	178	183	183	178	166
105°	614	622	628	634	634	648
115°	1143	1159	1154	1151	1143	1130
125°	1662	1688	1679	1670	1667	1485
135°	2150	2181	2188	2184	2176	1662
145°	2610	2630	2646	2650	2638	1631
155°	2984	2992	3002	3016	3007	1374
165°	3246	3243	3243	3264	3250	916
175°	3378	3370	3364	3384	3367	321
180°	3384	3384	3384	3384	3384	



TEST NUMBER: P923056

CATALOG NUMBER: DFN2DIP-SQ4F0-060D120US940-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2081.8	2081.8	2081.8	2081.8	2081.8
2.5°	2093.9	2083.9	2061.8	2081.8	2078.0
5°	2081.8	2073.9	2051.8	2067.8	2064.0
7.5°	2067.8	2055.9	2033.8	2050.0	2045.9
10°	2045.9	2031.9	2007.9	2023.8	2017.9
12.5°	2015.8	2003.9	1979.9	1989.9	1985.8
15°	1981.7	1969.9	1943.8	1951.9	1941.9
17.5°	1939.7	1927.9	1901.8	1911.6	1901.8
20°	1893.6	1881.8	1853.7	1859.7	1851.8
22.5°	1847.8	1829.7	1803.6	1803.6	1799.6
25°	1793.6	1777.7	1743.7	1747.5	1743.7
27.5°	1733.5	1719.5	1693.5	1687.7	1677.7
30°	1673.7	1657.4	1627.5	1621.6	1613.5
32.5°	1609.4	1597.6	1565.5	1553.4	1545.3
35°	1547.5	1527.5	1495.4	1483.3	1473.3
37.5°	1477.4	1459.3	1427.3	1413.2	1403.2
40°	1405.3	1389.2	1357.2	1339.3	1331.2
42.5°	1335.2	1319.1	1287.3	1267.1	1255.2
45°	1259.3	1245.2	1215.0	1193.2	1185.1
47.5°	1185.1	1171.1	1139.1	1117.0	1105.0
50°	1107.0	1097.0	1069.0	1040.9	1030.9
52.5°	1030.9	1016.9	991.0	968.9	954.9
55°	953.0	940.8	916.9	892.9	882.9
57.5°	874.9	864.9	838.7	814.8	806.6
60°	796.7	788.8	760.8	738.7	732.7
62.5°	720.6	706.6	686.6	666.6	658.6
65°	642.7	630.6	610.6	592.5	582.6
67.5°	562.6	552.4	534.6	520.6	512.5
70°	488.5	480.5	462.4	448.4	440.5
72.5°	412.4	404.4	394.4	380.4	374.4
75°	336.2	332.4	322.2	310.3	314.3
77.5°	268.2	260.2	256.1	250.2	244.2
80°	200.3	198.1	194.1	188.2	184.1
82.5°	136.2	136.2	134.2	126.2	126.2
85°	81.9	80.1	78.1	72.0	70.1
87.5°	36.1	32.1	28.0	22.1	20.0
90°	3.0	36.7	100.0	93.9	96.9
92.5°	63.2	85.7	88.7	91.8	91.8
95°	148.9	177.5	182.6	182.6	177.5
97.5°	247.9	274.5	285.7	285.7	285.7
100°	362.2	385.7	393.8	393.8	390.7
102.5°	482.6	499.9	511.1	514.2	511.1
105°	614.2	622.3	628.5	633.6	633.6
107.5°	744.8	757.1	757.1	759.0	744.8
110°	871.3	887.6	887.6	887.6	879.5



TEST NUMBER: P923056

CATALOG NUMBER: DFN2DIP-SQ4F0-060D120US940-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1008.0	1025.4	1022.3	1014.1	1008.0
115°	1142.6	1159.0	1153.9	1150.8	1142.6
117.5°	1276.3	1298.8	1284.5	1276.3	1268.2
120°	1411.0	1433.4	1411.0	1411.0	1401.9
122.5°	1533.5	1562.0	1547.7	1539.5	1533.5
125°	1662.0	1687.5	1679.4	1670.2	1667.1
127.5°	1787.5	1819.1	1807.9	1795.6	1787.5
130°	1904.8	1941.5	1936.4	1930.3	1919.0
132.5°	2036.4	2065.0	2067.0	2052.7	2044.6
135°	2149.6	2181.3	2187.5	2184.3	2176.2
137.5°	2276.2	2301.7	2306.8	2304.7	2292.5
140°	2387.4	2412.9	2427.1	2427.1	2415.9
142.5°	2501.7	2527.2	2535.3	2538.3	2527.2
145°	2609.8	2630.2	2646.5	2649.6	2638.4
147.5°	2706.7	2732.2	2744.5	2749.6	2738.4
150°	2806.7	2824.0	2835.3	2844.5	2835.3
152.5°	2895.5	2912.8	2927.1	2938.4	2927.1
155°	2984.2	2992.4	3001.6	3015.9	3006.7
157.5°	3060.8	3066.9	3071.9	3092.4	3078.1
160°	3129.1	3135.3	3138.3	3155.7	3143.4
162.5°	3192.3	3192.3	3195.4	3214.8	3200.5
165°	3246.4	3243.4	3243.4	3263.7	3249.5
167.5°	3295.4	3286.2	3286.2	3306.6	3292.4
170°	3332.1	3323.9	3320.9	3341.3	3323.9
172.5°	3357.6	3349.4	3346.4	3366.8	3349.4
175°	3378.1	3369.9	3363.8	3384.1	3366.8
177.5°	3389.3	3381.1	3374.9	3392.3	3374.9
180°	3384.1	3384.1	3384.1	3384.1	3384.1



TEST NUMBER: P923056  
 CATALOG NUMBER: DFN2DIP-SQ4F0-060D120US940-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.14	7.89	8.21	8.96	10.41	6.69	7.44	7.76	8.51	9.97
	3H	8.79	9.46	9.87	10.54	12.02	8.30	8.97	9.38	10.05	11.53
	4H	9.38	10.01	10.47	11.10	12.58	8.88	9.52	9.97	10.60	12.08
	6H	9.78	10.36	10.87	11.45	12.94	9.28	9.86	10.37	10.94	12.44
	8H	9.88	10.44	10.98	11.54	13.03	9.38	9.93	10.48	11.03	12.52
	12H	9.93	10.45	11.03	11.55	13.06	9.42	9.94	10.52	11.04	12.55
4H	2H	7.58	8.22	8.68	9.30	10.78	7.23	7.87	8.33	8.95	10.43
	3H	9.44	9.98	10.55	11.08	12.58	9.04	9.57	10.14	10.68	12.17
	4H	10.16	10.65	11.27	11.74	13.26	9.73	10.22	10.84	11.32	12.84
	6H	10.67	11.09	11.79	12.21	13.72	10.24	10.66	11.35	11.78	13.29
	8H	10.82	11.21	11.94	12.32	13.85	10.38	10.77	11.50	11.89	13.41
	12H	10.89	11.24	12.02	12.37	13.90	10.44	10.79	11.57	11.92	13.45
8H	4H	10.35	10.74	11.46	11.85	13.37	9.97	10.36	11.08	11.47	13.00
	6H	10.98	11.30	12.11	12.45	13.98	10.59	10.92	11.73	12.07	13.59
	8H	11.20	11.48	12.34	12.62	14.16	10.81	11.09	11.95	12.22	13.77
	12H	11.33	11.58	12.48	12.71	14.29	10.92	11.17	12.06	12.30	13.88
12H	4H	10.33	10.68	11.46	11.80	13.34	9.96	10.31	11.09	11.44	12.97
	6H	11.01	11.29	12.15	12.42	13.97	10.63	10.92	11.78	12.05	13.59
	8H	11.25	11.49	12.39	12.63	14.20	10.87	11.11	12.01	12.25	13.82