

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923319

Luminaire Tested: DFN2DIP-SQ4F0-140D160US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923319
REPORT IS A COMBINATION OF REPORTS P901738 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D160US940-RLLONL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 24736.0 lumens
Efficiency: N/A
Efficacy: 93.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 265.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923319

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US940-RLLONL

Luminous Intensity Polar Plot

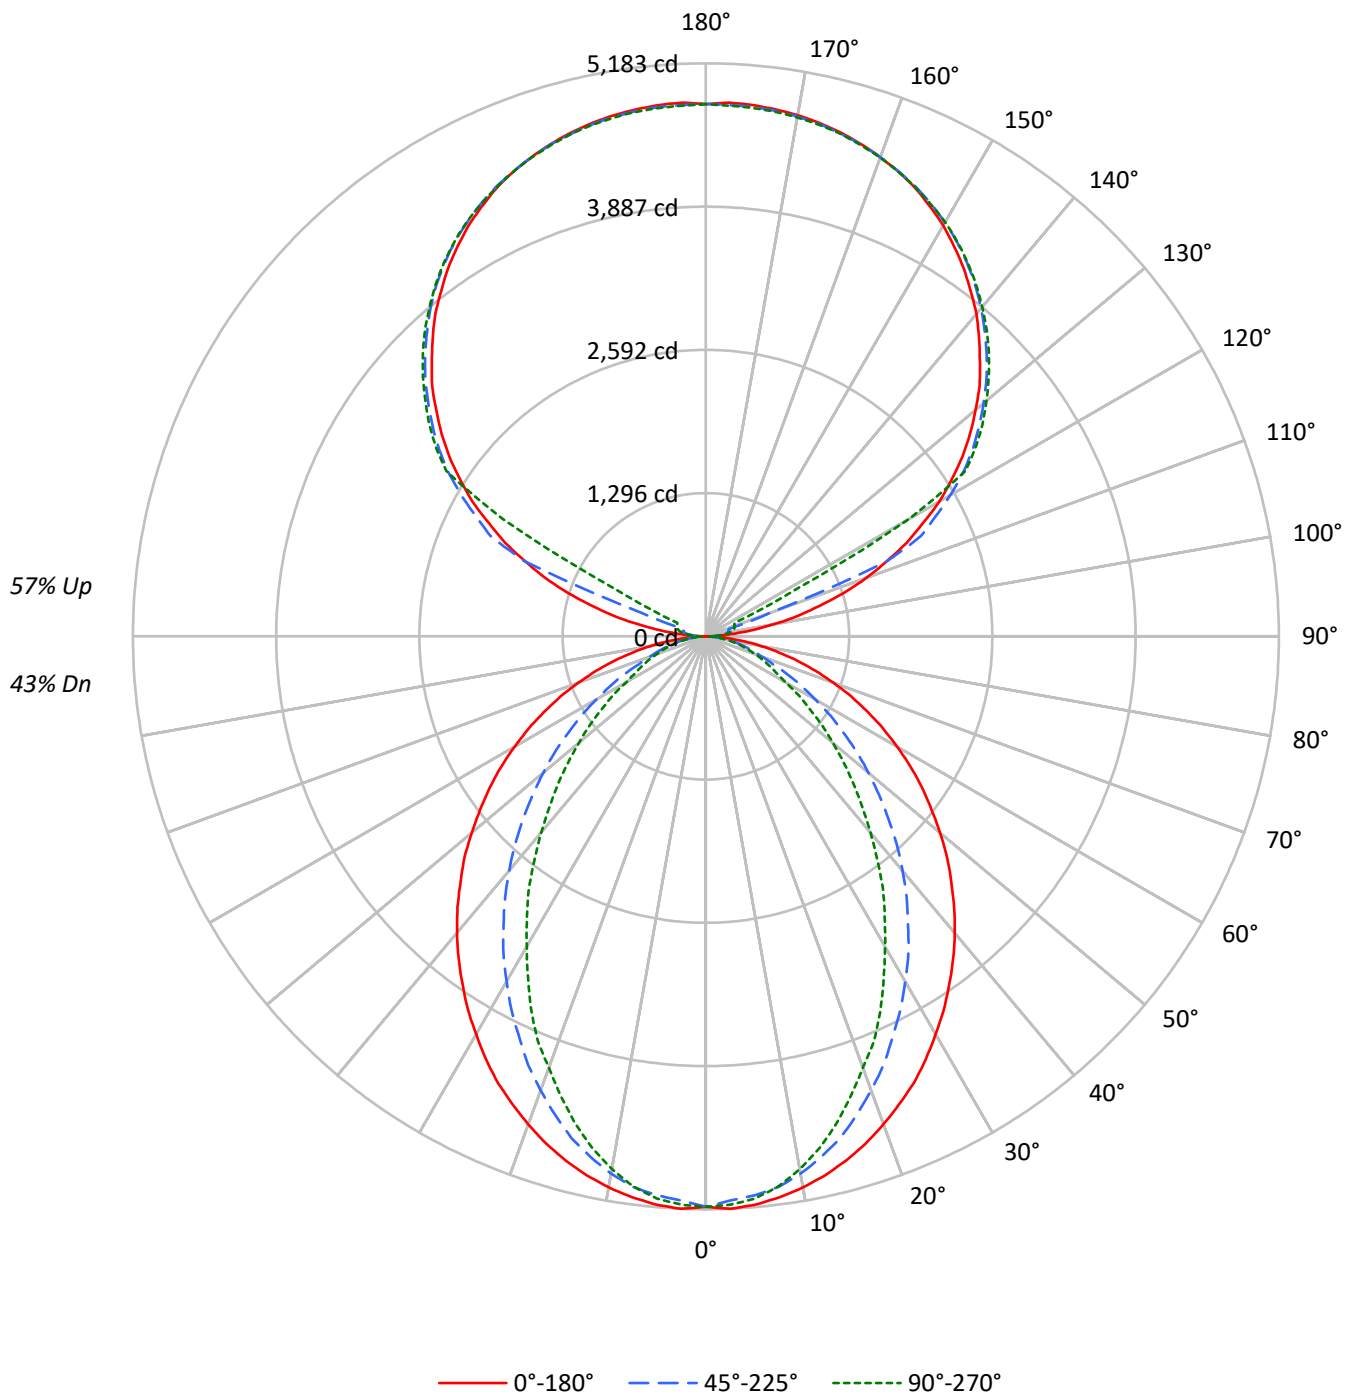

TEST NUMBER: P923319

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	44	43
2	88	81	75	70	81	75	70	65	62	58	55	50	48	46	40	38	37
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	33	32
4	74	64	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28
5	68	57	49	43	62	53	46	41	44	39	35	36	33	30	29	26	24
6	63	51	43	38	57	47	40	35	40	35	31	33	29	26	26	24	22
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	35	29	49	39	32	28	33	28	24	28	24	21	22	20	17
9	50	38	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3620	3620	3620
5°	3626	3564	3587
10°	3590	3494	3471
15°	3541	3380	3292
20°	3475	3221	3071
25°	3408	3043	2858
30°	3318	2861	2587
35°	3230	2665	2350
40°	3140	2462	2077
45°	3036	2236	1830
50°	2928	2008	1588
55°	2816	1765	1356
60°	2686	1511	1117
65°	2536	1252	1007
70°	2354	1010	913
75°	2126	892	833
80°	1796	751	726
85°	1250	505	552

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3036 cd/sqm

TEST NUMBER: P923319

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	483.6	2.0
10°-20°	1327.5	5.4
20°-30°	1863.7	7.5
30°-40°	2031.6	8.2
40°-50°	1867.3	7.5
50°-60°	1466.4	5.9
60°-70°	954.5	3.9
70°-80°	491.3	2.0
80°-90°	133.9	0.5
90°-100°	158.8	0.6
100°-110°	591.9	2.4
110°-120°	1569.8	6.3
120°-130°	2603.6	10.5
130°-140°	2765.6	11.2
140°-150°	2570.3	10.4
150°-160°	2066.5	8.4
160°-170°	1331.6	5.4
170°-180°	458.3	1.9
0°-30°	3674.8	14.9
0°-40°	5706.4	23.1
0°-60°	9040.1	36.5
0°-90°	10619.8	42.9
90°-120°	2320.4	9.4
90°-150°	10259.9	41.5
90°-180°	14116.0	57.1
0°-180°	24736.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5160	5160	5160	5160	5160	
5°	5160	5136	5075	5118	5104	489
15°	4907	4856	4697	4609	4562	1383
25°	4455	4305	3997	3806	3735	2049
35°	3838	3600	3189	2895	2792	2402
45°	3138	2825	2335	2003	1891	2423
55°	2386	2022	1517	1238	1149	2132
65°	1611	1232	812	654	640	1597
75°	859	532	374	341	336	909
85°	201	102	89	89	89	230
90°	3	42	70	87	94	23
95°	226	111	136	154	150	268
105°	1059	1164	213	251	265	1132
115°	2003	2062	2150	537	286	1972
125°	2832	2878	2944	2969	2979	2526
135°	3505	3561	3592	3627	3620	2708
145°	4066	4062	4122	4146	4129	2543
155°	4477	4446	4488	4508	4481	2063
165°	4717	4697	4707	4732	4707	1333
175°	4825	4801	4808	4832	4798	459
180°	4815	4815	4815	4815	4815	

TEST NUMBER: P923319

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5159.6	5159.6	5159.6	5159.6	5159.6
2.5°	5182.9	5159.6	5108.1	5155.2	5145.7
5°	5159.6	5136.3	5075.3	5117.5	5103.6
7.5°	5117.5	5089.7	5024.3	5042.7	5019.4
10°	5061.5	5028.8	4935.7	4921.3	4893.5
12.5°	4991.6	4949.5	4823.2	4795.4	4744.0
15°	4907.4	4855.9	4697.4	4608.7	4562.2
17.5°	4809.4	4734.5	4538.4	4435.8	4361.0
20°	4697.4	4603.7	4370.5	4254.0	4151.0
22.5°	4576.0	4468.5	4197.5	4039.0	3969.2
25°	4454.6	4305.0	3996.9	3805.6	3735.3
27.5°	4310.0	4151.0	3810.1	3590.7	3483.2
30°	4155.9	3978.1	3604.6	3366.7	3240.4
32.5°	4006.3	3791.3	3408.8	3128.5	3011.6
35°	3838.4	3600.1	3189.4	2895.1	2792.0
37.5°	3674.9	3417.7	2983.8	2661.3	2544.9
40°	3502.0	3222.1	2768.8	2437.4	2316.0
42.5°	3324.7	3025.9	2554.3	2208.5	2092.0
45°	3137.8	2824.8	2334.9	2002.9	1891.0
47.5°	2960.5	2629.1	2124.8	1792.9	1690.3
50°	2764.3	2432.9	1919.1	1596.7	1499.1
52.5°	2572.6	2222.3	1723.0	1414.9	1326.2
55°	2385.9	2021.7	1517.4	1237.5	1148.8
57.5°	2194.6	1821.1	1335.6	1074.1	999.3
60°	1998.4	1624.9	1143.9	906.1	831.3
62.5°	1807.2	1433.7	980.4	756.4	719.3
65°	1611.1	1232.5	812.4	653.9	639.5
67.5°	1424.2	1045.8	653.9	574.2	560.3
70°	1228.1	864.0	541.4	494.9	476.1
72.5°	1041.3	695.5	452.8	415.6	406.3
75°	859.0	532.1	373.5	340.8	336.4
77.5°	677.3	378.0	294.3	275.4	266.0
80°	508.8	271.0	223.9	205.6	205.6
82.5°	354.7	182.3	154.1	144.6	144.6
85°	200.6	102.5	88.6	88.6	88.6
87.5°	74.8	37.2	37.2	32.7	32.7
90°	3.3	41.8	69.5	87.3	93.9
92.5°	87.3	73.2	83.6	90.6	93.9
95°	226.3	111.3	135.7	153.5	149.8
97.5°	407.5	122.1	177.5	188.2	191.5
100°	616.9	139.5	198.6	226.3	233.4
102.5°	846.5	839.9	205.6	243.7	254.4
105°	1059.2	1163.9	212.7	250.7	264.7
107.5°	1306.5	1393.5	219.7	257.8	271.8
110°	1543.6	1616.5	609.8	261.4	275.1

TEST NUMBER: P923319

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1766.7	1829.2	1770.0	268.1	278.8
115°	2003.3	2062.4	2149.7	536.6	285.9
117.5°	2208.9	2278.4	2338.1	1839.5	926.8
120°	2439.0	2491.1	2553.9	2595.8	2125.4
122.5°	2633.8	2689.7	2759.6	2780.3	2784.0
125°	2832.4	2877.9	2944.2	2968.6	2978.9
127.5°	3013.6	3062.5	3115.0	3149.8	3153.1
130°	3184.6	3240.4	3278.5	3316.9	3313.6
132.5°	3358.7	3404.2	3442.3	3473.7	3470.4
135°	3505.1	3561.0	3592.1	3627.2	3620.2
137.5°	3658.2	3700.1	3735.2	3770.0	3759.6
140°	3808.0	3836.1	3874.2	3905.7	3888.3
142.5°	3933.8	3958.2	4003.3	4031.1	4013.7
145°	4066.2	4062.5	4121.7	4146.0	4128.7
147.5°	4180.8	4170.4	4229.6	4247.0	4233.3
150°	4292.5	4268.1	4324.0	4344.7	4327.3
152.5°	4386.4	4358.7	4410.8	4432.0	4407.5
155°	4477.0	4446.0	4487.8	4508.5	4480.8
157.5°	4550.3	4522.6	4554.0	4578.4	4550.3
160°	4613.2	4592.0	4613.2	4633.9	4609.4
162.5°	4668.6	4648.0	4665.3	4689.7	4658.3
165°	4717.4	4696.7	4707.1	4731.5	4707.1
167.5°	4755.9	4734.8	4745.6	4769.9	4738.5
170°	4787.3	4766.3	4773.2	4797.7	4766.3
172.5°	4808.0	4787.3	4794.4	4818.8	4787.3
175°	4825.4	4801.0	4808.0	4832.4	4797.7
177.5°	4832.4	4808.0	4811.8	4836.2	4804.7
180°	4815.1	4815.1	4815.1	4815.1	4815.1

TEST NUMBER: P923319

CATALOG NUMBER: DFN2DIP-SQ4F0-140D160US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.93	11.71	11.95	12.73	14.10	6.89	7.67	7.92	8.69	10.07
	3H	12.61	13.30	13.64	14.34	15.73	8.08	8.77	9.11	9.81	11.20
	4H	13.22	13.88	14.26	14.91	16.31	8.53	9.18	9.57	10.22	11.62
	6H	13.64	14.25	14.70	15.29	16.70	8.85	9.45	9.90	10.49	11.90
	8H	13.77	14.34	14.83	15.40	16.81	8.93	9.51	9.99	10.57	11.97
	12H	13.83	14.38	14.89	15.43	16.86	8.98	9.52	10.04	10.57	12.00
4H	2H	10.94	11.60	11.99	12.64	14.04	7.48	8.14	8.53	9.18	10.58
	3H	12.77	13.32	13.83	14.38	15.80	8.83	9.38	9.89	10.44	11.85
	4H	13.47	13.97	14.53	15.02	16.46	9.38	9.88	10.44	10.93	12.37
	6H	13.98	14.41	15.06	15.49	16.92	9.79	10.22	10.87	11.30	12.73
	8H	14.16	14.56	15.23	15.63	17.08	9.92	10.32	11.00	11.39	12.84
	12H	14.25	14.62	15.35	15.70	17.15	9.99	10.35	11.08	11.43	12.88
8H	4H	13.43	13.83	14.50	14.90	16.35	9.66	10.06	10.73	11.13	12.57
	6H	14.00	14.33	15.10	15.44	16.88	10.17	10.50	11.27	11.62	13.06
	8H	14.22	14.51	15.32	15.60	17.06	10.36	10.65	11.47	11.75	13.21
	12H	14.36	14.61	15.46	15.70	17.20	10.48	10.74	11.59	11.83	13.33
12H	4H	13.38	13.74	14.47	14.83	16.28	9.66	10.02	10.75	11.11	12.55
	6H	13.97	14.26	15.08	15.36	16.82	10.22	10.51	11.33	11.61	13.07
	8H	14.20	14.45	15.30	15.54	17.04	10.43	10.69	11.54	11.78	13.28