

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923352

Luminaire Tested: DFN2DIP-SQ4F0-160D160US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923352
REPORT IS A COMBINATION OF REPORTS P900219 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-160D160US940-FLLFLL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 26752.1 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 288.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923352

CATALOG NUMBER: DFN2DIP-SQ4F0-160D160US940-FLLFLL

Luminous Intensity Polar Plot

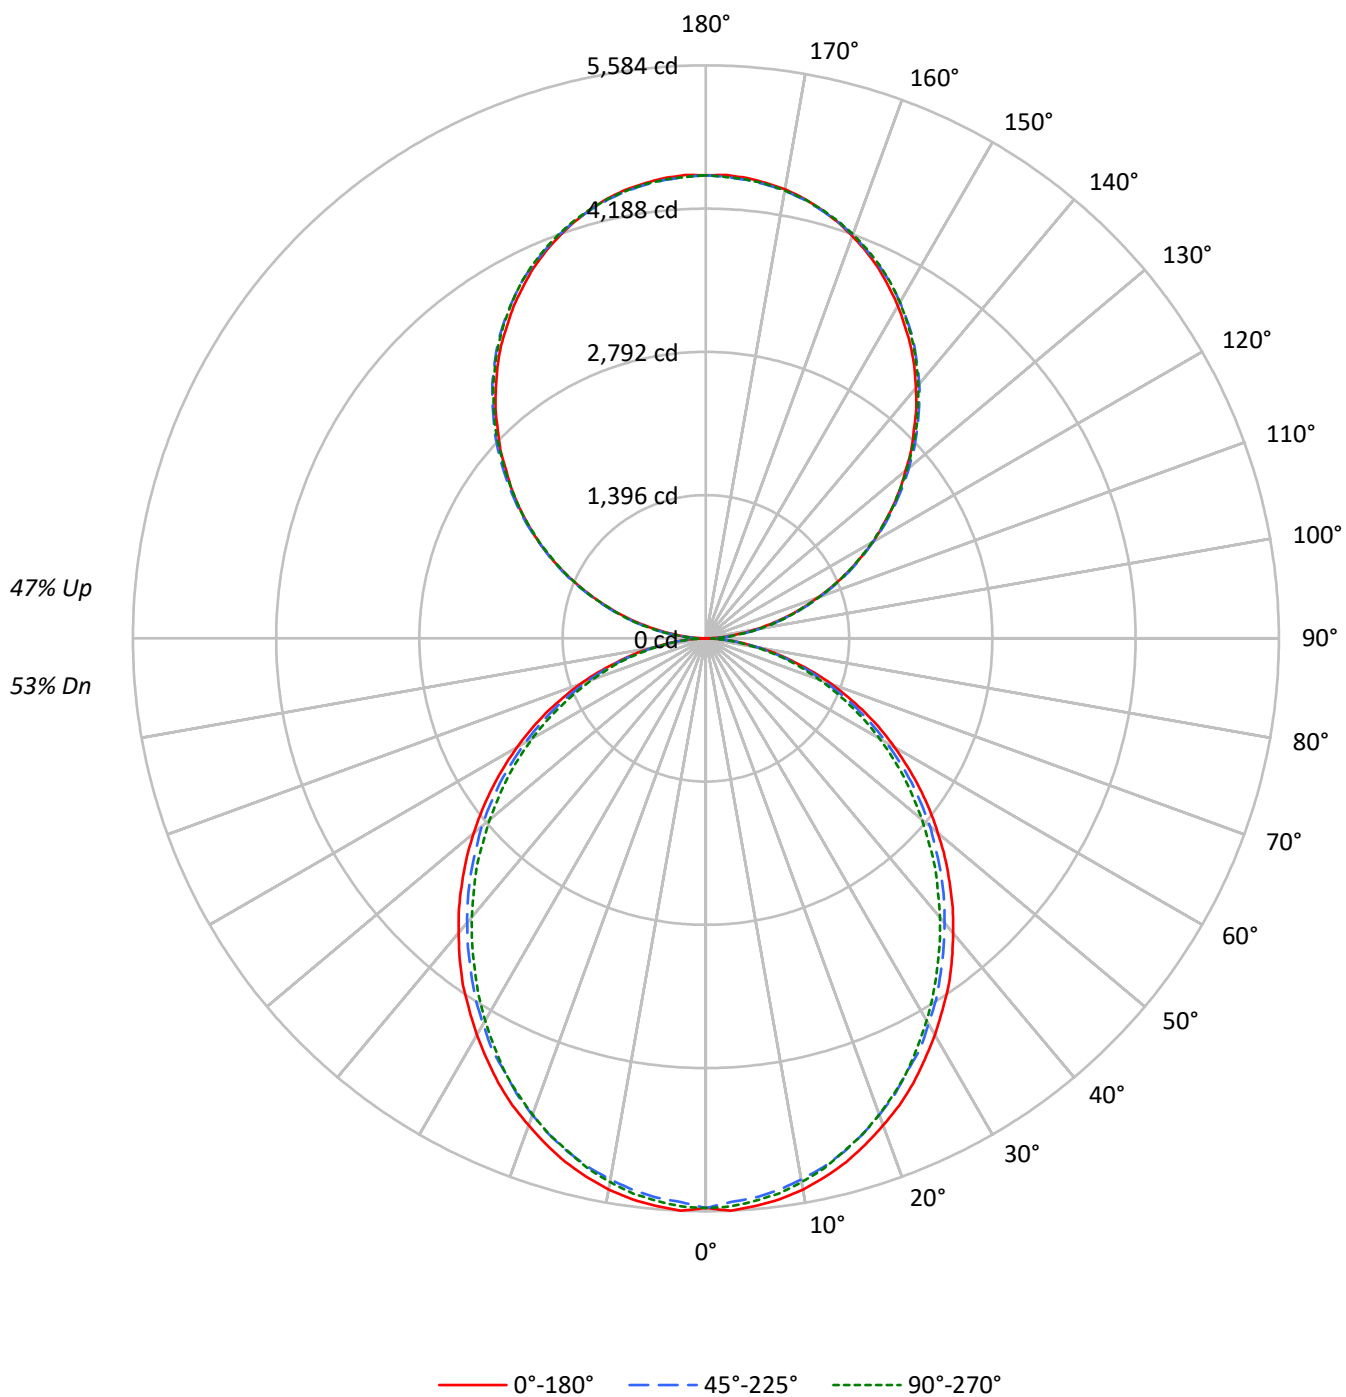

TEST NUMBER: P923352

CATALOG NUMBER: DFN2DIP-SQ4F0-160D160US940-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3895	3895	3895
5°	3902	3842	3868
10°	3870	3791	3817
15°	3813	3729	3736
20°	3736	3643	3653
25°	3659	3540	3558
30°	3563	3445	3436
35°	3473	3332	3306
40°	3361	3218	3184
45°	3249	3103	3058
50°	3127	2983	2912
55°	2999	2844	2779
60°	2855	2679	2626
65°	2698	2509	2445
70°	2497	2301	2252
75°	2219	2053	2075
80°	1885	1736	1733
85°	1362	1188	1165

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3551 cd/sqm

TEST NUMBER: P923352

CATALOG NUMBER: DFN2DIP-SQ4F0-160D160US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	522.5	2.0
10°-20°	1470.1	5.5
20°-30°	2160.5	8.1
30°-40°	2509.3	9.4
40°-50°	2506.2	9.4
50°-60°	2185.3	8.2
60°-70°	1615.4	6.0
70°-80°	914.0	3.4
80°-90°	254.0	0.9
90°-100°	279.2	1.0
100°-110°	887.2	3.3
110°-120°	1518.3	5.7
120°-130°	1996.8	7.5
130°-140°	2241.4	8.4
140°-150°	2197.9	8.2
150°-160°	1843.7	6.9
160°-170°	1222.7	4.6
170°-180°	427.4	1.6
0°-30°	4153.2	15.5
0°-40°	6662.5	24.9
0°-60°	11354.0	42.4
0°-90°	14137.5	52.8
90°-120°	2684.7	10.0
90°-150°	9120.8	34.1
90°-180°	12615.0	47.2
0°-180°	26752.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5552	5552	5552	5552	5552	
5°	5552	5531	5472	5514	5504	527
15°	5285	5253	5183	5205	5178	1488
25°	4783	4740	4650	4660	4650	2201
35°	4127	4073	3988	3955	3929	2577
45°	3358	3321	3240	3182	3160	2592
55°	2541	2509	2445	2381	2354	2272
65°	1714	1682	1628	1580	1554	1694
75°	896	886	859	827	838	957
85°	219	214	208	192	187	244
90°	4	49	133	125	129	26
95°	199	237	244	244	237	221
105°	819	830	838	845	845	864
115°	1524	1545	1539	1534	1524	1507
125°	2216	2250	2239	2227	2223	1980
135°	2866	2909	2917	2913	2902	2216
145°	3480	3507	3529	3533	3518	2174
155°	3979	3990	4002	4021	4009	1832
165°	4329	4325	4325	4352	4333	1221
175°	4504	4494	4485	4513	4489	428
180°	4513	4513	4513	4513	4513	

TEST NUMBER: P923352

CATALOG NUMBER: DFN2DIP-SQ4F0-160D160US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5551.5	5551.5	5551.5	5551.5	5551.5
2.5°	5583.8	5557.1	5498.3	5551.5	5541.3
5°	5551.5	5530.6	5471.6	5514.2	5503.9
7.5°	5514.2	5482.4	5423.5	5466.5	5455.8
10°	5455.8	5418.4	5354.5	5396.9	5381.0
12.5°	5375.4	5343.7	5279.6	5306.3	5295.5
15°	5284.7	5253.1	5183.3	5204.9	5178.3
17.5°	5172.6	5140.9	5071.2	5097.8	5071.2
20°	5049.7	5018.0	4943.2	4959.1	4938.1
22.5°	4927.4	4879.3	4809.5	4809.5	4798.8
25°	4783.0	4740.5	4649.8	4660.1	4649.8
27.5°	4622.6	4585.3	4516.2	4500.4	4473.7
30°	4462.9	4419.9	4340.0	4324.2	4302.7
32.5°	4291.9	4260.2	4174.6	4142.4	4120.9
35°	4126.6	4073.3	3987.7	3955.4	3928.9
37.5°	3939.7	3891.5	3806.0	3768.5	3742.0
40°	3747.6	3704.6	3619.1	3571.5	3550.0
42.5°	3560.8	3517.7	3432.7	3379.0	3347.2
45°	3358.0	3320.6	3240.2	3181.8	3160.3
47.5°	3160.3	3122.9	3037.4	2978.5	2946.8
50°	2951.9	2925.3	2850.5	2775.7	2749.1
52.5°	2749.1	2711.8	2642.7	2583.7	2546.4
55°	2541.3	2509.0	2445.0	2381.0	2354.4
57.5°	2332.9	2306.2	2236.6	2172.6	2151.1
60°	2124.4	2103.5	2028.7	1969.8	1953.9
62.5°	1921.6	1884.3	1831.0	1777.8	1756.3
65°	1713.8	1681.5	1628.3	1580.2	1553.5
67.5°	1500.3	1473.1	1425.6	1388.1	1366.6
70°	1302.6	1281.1	1233.0	1195.6	1174.7
72.5°	1099.8	1078.3	1051.8	1014.3	998.5
75°	896.5	886.4	859.2	827.4	838.2
77.5°	715.3	693.8	683.1	667.2	651.3
80°	534.0	528.4	517.6	501.8	491.1
82.5°	363.0	363.0	357.9	336.4	336.4
85°	218.6	213.5	208.4	192.0	186.9
87.5°	96.3	85.5	74.7	58.9	53.2
90°	4.1	49.0	133.3	125.2	129.2
92.5°	84.4	114.3	118.3	122.4	122.4
95°	198.6	236.7	243.5	243.5	236.7
97.5°	330.6	366.0	380.9	380.9	380.9
100°	483.0	514.2	525.1	525.1	521.0
102.5°	643.5	666.6	681.5	685.6	681.5
105°	818.9	829.8	838.0	844.8	844.8
107.5°	993.1	1009.4	1009.4	1012.2	993.1
110°	1161.8	1183.6	1183.6	1183.6	1172.7

TEST NUMBER: P923352

CATALOG NUMBER: DFN2DIP-SQ4F0-160D160US940-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1344.1	1367.3	1363.2	1352.3	1344.1
115°	1523.7	1545.4	1538.6	1534.5	1523.7
117.5°	1701.9	1731.8	1712.8	1701.9	1691.0
120°	1881.5	1911.4	1881.5	1881.5	1869.2
122.5°	2044.7	2082.9	2063.8	2052.9	2044.7
125°	2216.2	2250.1	2239.3	2227.0	2222.9
127.5°	2383.5	2425.6	2410.6	2394.3	2383.5
130°	2539.9	2588.9	2582.1	2573.9	2558.9
132.5°	2715.4	2753.5	2756.2	2737.2	2726.3
135°	2866.4	2908.6	2916.8	2912.7	2901.8
137.5°	3035.1	3069.1	3076.0	3073.2	3056.9
140°	3183.4	3217.4	3236.5	3236.5	3221.5
142.5°	3335.8	3369.8	3380.7	3384.8	3369.8
145°	3480.0	3507.2	3528.9	3533.0	3518.1
147.5°	3609.2	3643.3	3659.6	3666.4	3651.4
150°	3742.5	3765.7	3780.7	3792.9	3780.7
152.5°	3860.9	3884.0	3903.1	3918.0	3903.1
155°	3979.3	3990.1	4002.4	4021.4	4009.2
157.5°	4081.3	4089.5	4096.2	4123.4	4104.5
160°	4172.4	4180.6	4184.7	4207.8	4191.5
162.5°	4256.8	4256.8	4260.9	4286.7	4267.6
165°	4328.9	4324.8	4324.8	4352.0	4333.0
167.5°	4394.2	4382.0	4382.0	4409.2	4390.1
170°	4443.1	4432.2	4428.2	4455.4	4432.2
172.5°	4477.2	4466.3	4462.2	4489.4	4466.3
175°	4504.4	4493.5	4485.3	4512.6	4489.4
177.5°	4519.4	4508.5	4500.3	4523.5	4500.3
180°	4512.6	4512.6	4512.6	4512.6	4512.6

TEST NUMBER: P923352

CATALOG NUMBER: DFN2DIP-SQ4F0-160D160US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.27	13.15	13.20	14.10	15.33	11.82	12.71	12.75	13.66	14.89
	3H	13.93	14.73	14.88	15.69	16.94	13.44	14.24	14.39	15.20	16.45
	4H	14.53	15.28	15.48	16.24	17.50	14.03	14.78	14.99	15.75	17.01
	6H	14.93	15.62	15.90	16.59	17.87	14.43	15.12	15.40	16.09	17.37
	8H	15.04	15.70	16.01	16.68	17.96	14.54	15.20	15.51	16.18	17.46
	12H	15.09	15.72	16.07	16.70	17.99	14.58	15.21	15.56	16.19	17.49
4H	2H	12.73	13.48	13.70	14.45	15.71	12.38	13.13	13.34	14.09	15.36
	3H	14.60	15.23	15.58	16.23	17.50	14.20	14.83	15.17	15.82	17.10
	4H	15.32	15.90	16.31	16.88	18.19	14.90	15.47	15.88	16.46	17.76
	6H	15.84	16.34	16.84	17.35	18.65	15.41	15.91	16.41	16.92	18.22
	8H	16.00	16.46	16.99	17.46	18.78	15.56	16.02	16.56	17.03	18.34
	12H	16.07	16.49	17.09	17.51	18.83	15.62	16.04	16.64	17.06	18.38
8H	4H	15.52	15.99	16.52	16.99	18.30	15.15	15.61	16.14	16.61	17.93
	6H	16.16	16.54	17.18	17.59	18.90	15.78	16.16	16.80	17.20	18.52
	8H	16.38	16.72	17.41	17.75	19.08	15.99	16.33	17.02	17.36	18.69
	12H	16.52	16.82	17.55	17.84	19.22	16.11	16.41	17.14	17.43	18.81
12H	4H	15.51	15.93	16.52	16.95	18.27	15.14	15.56	16.16	16.58	17.90
	6H	16.19	16.53	17.22	17.56	18.89	15.82	16.16	16.85	17.19	18.52
	8H	16.44	16.73	17.47	17.76	19.13	16.06	16.35	17.09	17.38	18.75