

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925942

Luminaire Tested: DFN2DIP-SQ4F0-110D060US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925942
REPORT IS A COMBINATION OF REPORTS P900070 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-110D060US950-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13985.7 lumens
Efficiency: N/A
Efficacy: 93.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 150.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925942

CATALOG NUMBER: DFN2DIP-SQ4F0-110D060US950-RLLFLL

Luminous Intensity Polar Plot

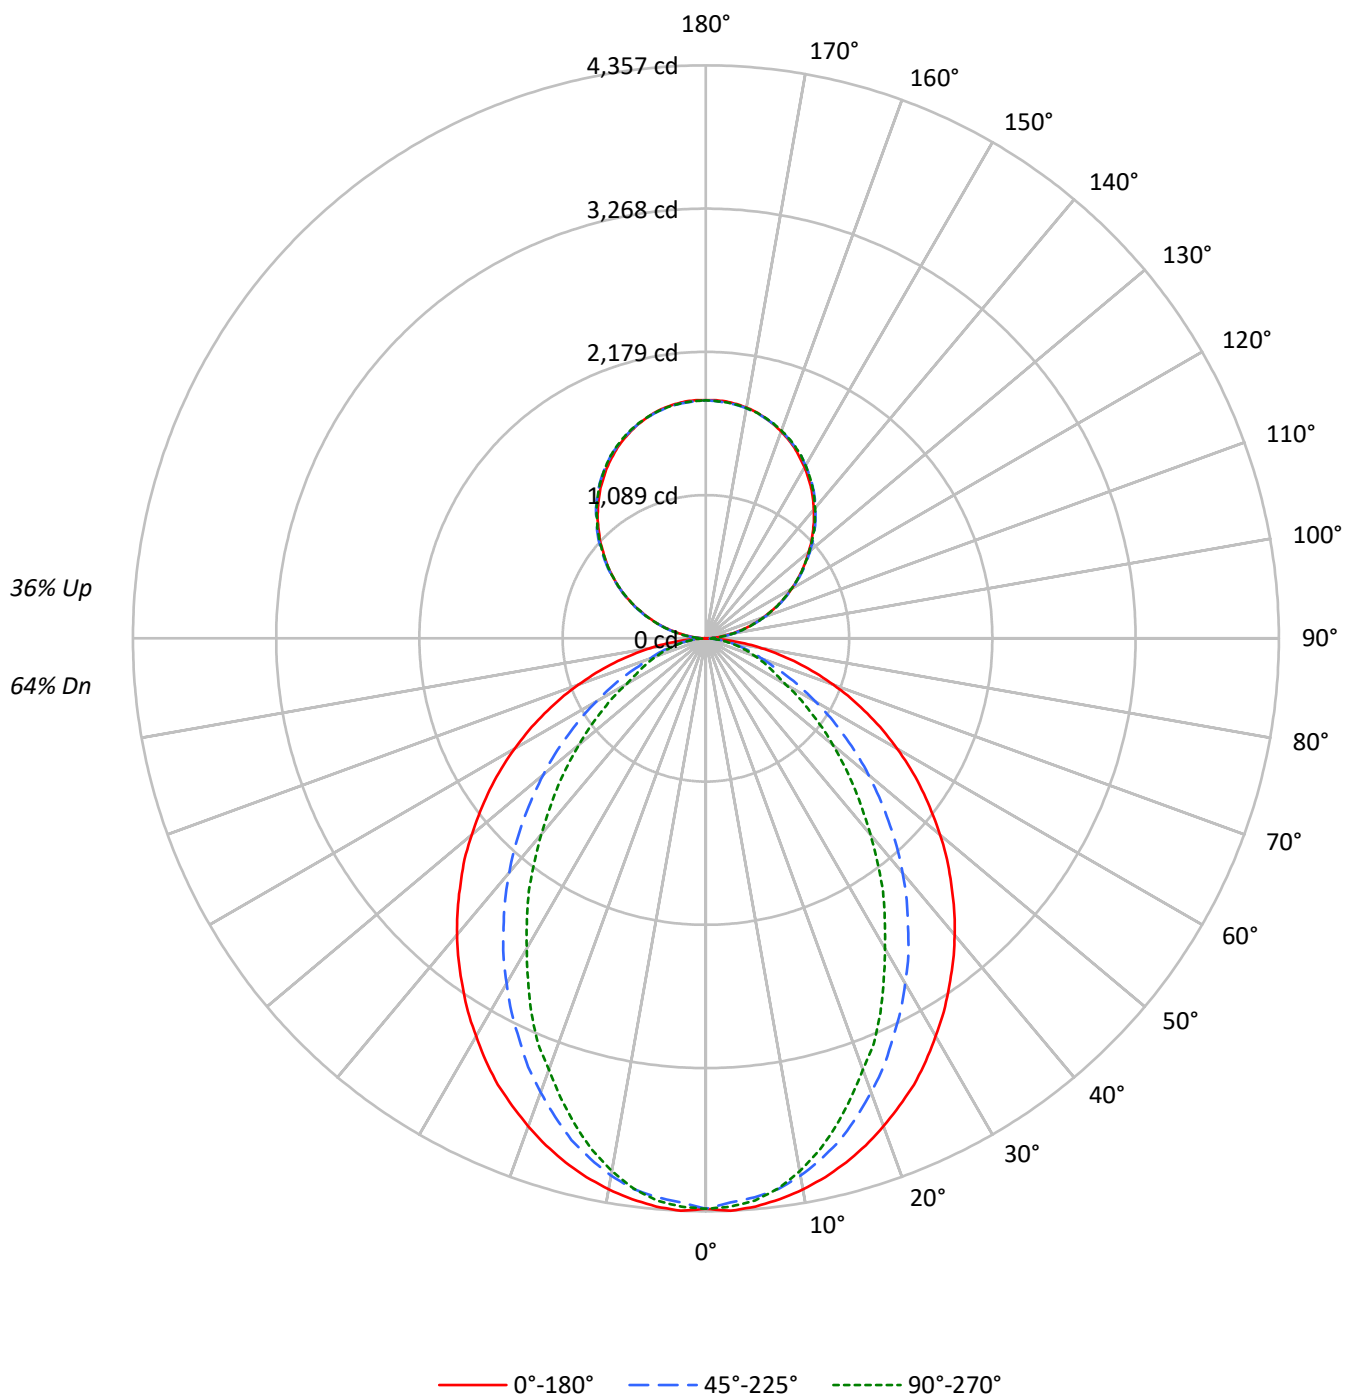

TEST NUMBER: P925942

CATALOG NUMBER: DFN2DIP-SQ4F0-110D060US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69
1	101	97	94	90	95	92	88	85	81	78	76	71	69	67	62	61	59
2	93	86	80	75	87	81	76	71	72	68	64	63	60	57	55	53	51
3	85	76	69	63	80	72	65	60	64	59	55	56	52	49	49	47	44
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	45	41	39
5	72	61	53	47	68	58	50	45	51	46	41	46	41	38	40	37	34
6	67	55	47	41	63	52	45	39	47	41	36	42	37	33	37	33	30
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	25
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22
10	50	38	31	26	48	37	30	26	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3043	3043	3043
5°	3048	2996	3015
10°	3018	2937	2918
15°	2976	2841	2767
20°	2921	2708	2582
25°	2865	2558	2402
30°	2789	2405	2175
35°	2715	2240	1975
40°	2640	2069	1746
45°	2552	1880	1538
50°	2462	1688	1335
55°	2367	1484	1140
60°	2258	1270	939
65°	2132	1052	846
70°	1979	850	767
75°	1787	750	700
80°	1510	631	610
85°	1051	425	464

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2552 cd/sqm

TEST NUMBER: P925942

CATALOG NUMBER: DFN2DIP-SQ4F0-110D060US950-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.5	2.9
10°-20°	1115.9	8.0
20°-30°	1566.7	11.2
30°-40°	1707.7	12.2
40°-50°	1569.6	11.2
50°-60°	1232.7	8.8
60°-70°	802.4	5.7
70°-80°	413.0	3.0
80°-90°	110.6	0.8
90°-100°	112.0	0.8
100°-110°	355.9	2.5
110°-120°	609.1	4.4
120°-130°	801.1	5.7
130°-140°	899.2	6.4
140°-150°	881.7	6.3
150°-160°	739.6	5.3
160°-170°	490.5	3.5
170°-180°	171.4	1.2
0°-30°	3089.0	22.1
0°-40°	4796.8	34.3
0°-60°	7599.1	54.3
0°-90°	8925.1	63.8
90°-120°	1077.0	7.7
90°-150°	3659.0	26.2
90°-180°	5061.0	36.2
0°-180°	13985.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4337	4337	4337	4337	4337	
5°	4337	4318	4266	4302	4290	411
15°	4125	4082	3949	3874	3835	1162
25°	3744	3619	3360	3199	3140	1722
35°	3226	3026	2681	2434	2347	2019
45°	2638	2374	1963	1684	1590	2037
55°	2006	1700	1276	1040	966	1792
65°	1354	1036	683	550	538	1343
75°	722	447	314	286	283	764
85°	169	86	74	74	74	194
90°	2	20	54	50	52	14
95°	80	95	98	98	95	89
105°	329	333	336	339	339	347
115°	611	620	617	616	611	605
125°	889	903	898	893	892	794
135°	1150	1167	1170	1168	1164	889
145°	1396	1407	1416	1417	1411	872
155°	1596	1601	1606	1613	1608	735
165°	1737	1735	1735	1746	1738	490
175°	1807	1803	1799	1810	1801	172
180°	1810	1810	1810	1810	1810	

TEST NUMBER: P925942

CATALOG NUMBER: DFN2DIP-SQ4F0-110D060US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4337.2	4337.2	4337.2	4337.2	4337.2
2.5°	4356.7	4337.2	4293.9	4333.4	4325.5
5°	4337.2	4317.6	4266.4	4301.8	4290.1
7.5°	4301.8	4278.4	4223.5	4238.9	4219.3
10°	4254.7	4227.2	4148.9	4136.8	4113.6
12.5°	4196.0	4160.6	4054.4	4031.0	3987.7
15°	4125.2	4081.9	3948.6	3874.1	3834.9
17.5°	4042.8	3979.9	3815.0	3728.7	3665.8
20°	3948.6	3869.9	3673.8	3575.9	3489.3
22.5°	3846.6	3756.2	3528.5	3395.2	3336.4
25°	3744.5	3618.8	3359.8	3199.0	3139.9
27.5°	3623.0	3489.3	3202.8	3018.3	2927.9
30°	3493.5	3344.0	3030.0	2830.0	2723.9
32.5°	3367.7	3186.9	2865.4	2629.8	2531.5
35°	3226.5	3026.2	2681.0	2433.7	2347.0
37.5°	3089.1	2873.0	2508.2	2237.0	2139.2
40°	2943.8	2708.5	2327.5	2048.8	1946.8
42.5°	2794.6	2543.6	2147.2	1856.5	1758.6
45°	2637.7	2374.5	1962.7	1683.6	1589.6
47.5°	2488.6	2210.0	1786.1	1507.0	1420.9
50°	2323.7	2045.1	1613.3	1342.2	1260.1
52.5°	2162.5	1868.1	1448.4	1189.4	1114.7
55°	2005.5	1699.5	1275.5	1040.2	965.7
57.5°	1844.8	1530.8	1122.7	902.9	839.9
60°	1679.9	1365.9	961.5	761.7	698.8
62.5°	1519.1	1205.2	824.2	635.9	604.6
65°	1354.2	1036.0	683.0	549.7	537.6
67.5°	1197.3	879.1	549.7	482.6	471.0
70°	1032.3	726.3	455.2	416.0	400.2
72.5°	875.3	584.7	380.6	349.4	341.4
75°	722.1	447.2	314.0	286.5	282.8
77.5°	569.3	317.8	247.4	231.5	223.6
80°	427.7	227.8	188.2	172.9	172.9
82.5°	298.1	153.2	129.6	121.6	121.6
85°	168.7	86.2	74.5	74.5	74.5
87.5°	62.9	31.2	31.2	27.5	27.5
90°	1.6	19.7	53.5	50.2	51.8
92.5°	33.9	45.9	47.5	49.1	49.1
95°	79.7	94.9	97.7	97.7	94.9
97.5°	132.6	146.8	152.8	152.8	152.8
100°	193.8	206.3	210.6	210.6	209.0
102.5°	258.2	267.4	273.4	275.0	273.4
105°	328.6	332.9	336.2	339.0	339.0
107.5°	398.4	405.0	405.0	406.0	398.4
110°	466.1	474.8	474.8	474.8	470.4



TEST NUMBER: P925942

CATALOG NUMBER: DFN2DIP-SQ4F0-110D060US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	539.2	548.5	546.8	542.4	539.2
115°	611.2	620.0	617.2	615.6	611.2
117.5°	682.8	694.8	687.1	682.8	678.4
120°	754.8	766.8	754.8	754.8	749.8
122.5°	820.2	835.5	827.9	823.6	820.2
125°	889.0	902.7	898.3	893.4	891.8
127.5°	956.2	973.1	967.1	960.6	956.2
130°	1019.0	1038.6	1035.9	1032.6	1026.6
132.5°	1089.4	1104.6	1105.7	1098.1	1093.7
135°	1150.0	1166.8	1170.1	1168.5	1164.1
137.5°	1217.6	1231.2	1234.0	1232.9	1226.4
140°	1277.1	1290.8	1298.4	1298.4	1292.4
142.5°	1338.2	1351.8	1356.2	1357.8	1351.8
145°	1396.1	1407.0	1415.7	1417.4	1411.3
147.5°	1447.9	1461.5	1468.1	1470.8	1464.8
150°	1501.4	1510.7	1516.7	1521.5	1516.7
152.5°	1548.8	1558.2	1565.8	1571.8	1565.8
155°	1596.3	1600.7	1605.6	1613.3	1608.3
157.5°	1637.3	1640.6	1643.3	1654.2	1646.6
160°	1673.9	1677.1	1678.8	1688.0	1681.5
162.5°	1707.7	1707.7	1709.3	1719.7	1712.0
165°	1736.6	1734.9	1734.9	1745.9	1738.3
167.5°	1762.8	1757.9	1757.9	1768.8	1761.2
170°	1782.5	1778.1	1776.4	1787.3	1778.1
172.5°	1796.1	1791.7	1790.1	1801.0	1791.7
175°	1807.0	1802.7	1799.3	1810.3	1801.0
177.5°	1813.0	1808.7	1805.3	1814.6	1805.3
180°	1810.3	1810.3	1810.3	1810.3	1810.3

TEST NUMBER: P925942

CATALOG NUMBER: DFN2DIP-SQ4F0-110D060US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.23	13.18	13.06	14.04	15.10	8.19	9.14	9.02	10.00	11.06
	3H	13.92	14.77	14.77	15.64	16.73	9.39	10.24	10.24	11.11	12.20
	4H	14.54	15.34	15.40	16.21	17.31	9.84	10.65	10.71	11.52	12.62
	6H	14.97	15.71	15.84	16.59	17.70	10.17	10.91	11.05	11.79	12.90
	8H	15.10	15.81	15.99	16.70	17.81	10.27	10.97	11.15	11.87	12.98
	12H	15.17	15.84	16.06	16.73	17.87	10.31	10.99	11.20	11.87	13.01
4H	2H	12.26	13.07	13.13	13.94	15.04	8.80	9.61	9.67	10.48	11.58
	3H	14.11	14.78	14.99	15.68	16.79	10.16	10.83	11.04	11.74	12.85
	4H	14.81	15.42	15.70	16.31	17.46	10.72	11.33	11.61	12.23	13.37
	6H	15.33	15.86	16.24	16.78	17.93	11.14	11.67	12.05	12.59	13.74
	8H	15.51	16.00	16.42	16.92	18.08	11.28	11.77	12.19	12.68	13.84
	12H	15.62	16.06	16.54	16.99	18.16	11.35	11.79	12.28	12.72	13.89
8H	4H	14.78	15.27	15.69	16.19	17.35	11.01	11.50	11.92	12.42	13.57
	6H	15.36	15.76	16.30	16.72	17.88	11.53	11.94	12.47	12.90	14.05
	8H	15.58	15.94	16.53	16.89	18.06	11.73	12.08	12.67	13.04	14.21
	12H	15.73	16.04	16.67	16.98	18.21	11.85	12.17	12.80	13.11	14.33
12H	4H	14.74	15.18	15.67	16.12	17.28	11.02	11.46	11.95	12.40	13.56
	6H	15.33	15.69	16.28	16.64	17.82	11.58	11.94	12.53	12.89	14.07
	8H	15.56	15.88	16.51	16.82	18.05	11.80	12.12	12.75	13.06	14.28