

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926017

Luminaire Tested: DFN2DIP-SQ4F0-140D070US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926017
REPORT IS A COMBINATION OF REPORTS P901611 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D070US950-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19833.6 lumens
Efficiency: N/A
Efficacy: 101.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 196
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926017

CATALOG NUMBER: DFN2DIP-SQ4F0-140D070US950-FLLONL

Luminous Intensity Polar Plot

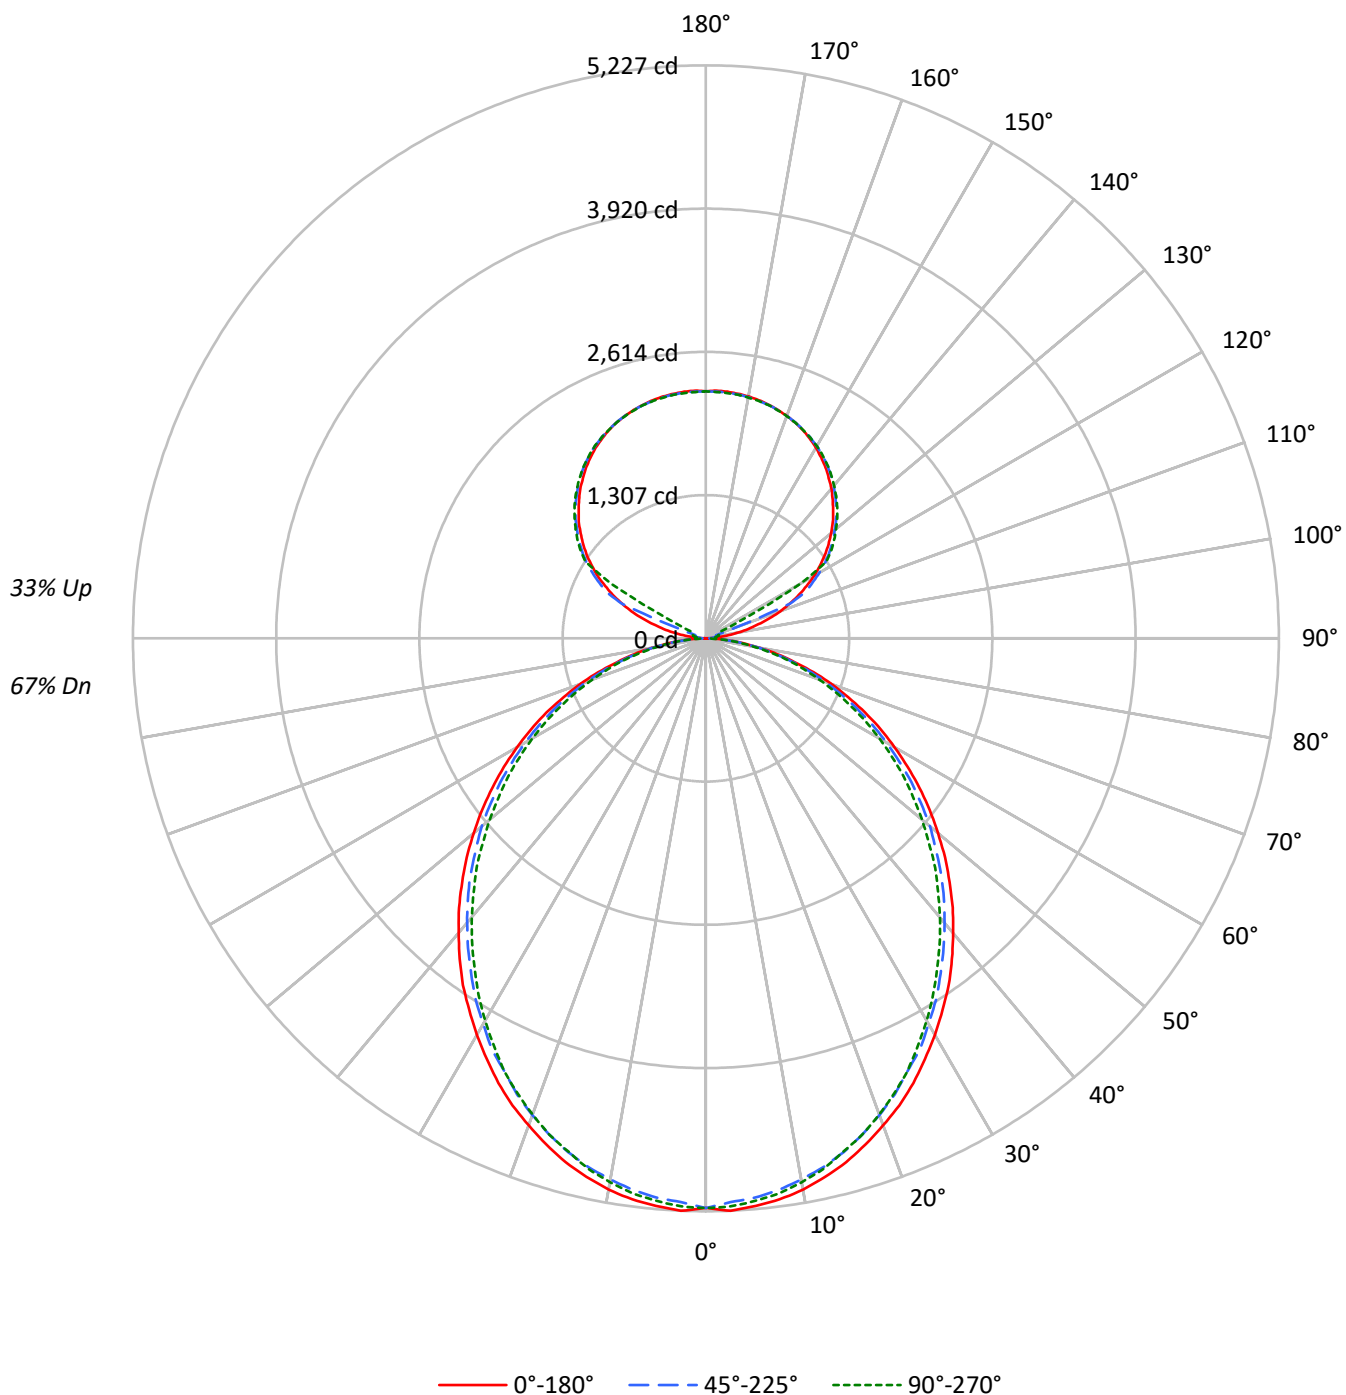

TEST NUMBER: P926017

CATALOG NUMBER: DFN2DIP-SQ4F0-140D070US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	97	93	90	95	92	88	85	81	79	76	72	70	68	63	62	60
2	92	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3647	3647	3647
5°	3652	3596	3621
10°	3623	3549	3573
15°	3569	3491	3497
20°	3497	3411	3420
25°	3426	3314	3330
30°	3336	3225	3216
35°	3251	3119	3095
40°	3146	3012	2980
45°	3042	2905	2863
50°	2927	2793	2726
55°	2808	2663	2601
60°	2673	2508	2458
65°	2525	2349	2289
70°	2338	2154	2108
75°	2077	1922	1942
80°	1765	1625	1622
85°	1275	1112	1091

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3042 cd/sqm

TEST NUMBER: P926017

CATALOG NUMBER: DFN2DIP-SQ4F0-140D070US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	489.1	2.5
10°-20°	1376.2	6.9
20°-30°	2022.5	10.2
30°-40°	2349.0	11.8
40°-50°	2346.1	11.8
50°-60°	2045.7	10.3
60°-70°	1512.2	7.6
70°-80°	855.6	4.3
80°-90°	229.8	1.2
90°-100°	74.3	0.4
100°-110°	277.0	1.4
110°-120°	734.8	3.7
120°-130°	1218.6	6.1
130°-140°	1294.5	6.5
140°-150°	1203.1	6.1
150°-160°	967.2	4.9
160°-170°	623.3	3.1
170°-180°	214.5	1.1
0°-30°	3887.9	19.6
0°-40°	6236.9	31.4
0°-60°	10628.8	53.6
0°-90°	13226.4	66.7
90°-120°	1086.1	5.5
90°-150°	4802.2	24.2
90°-180°	6607.0	33.3
0°-180°	19833.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5197	5197	5197	5197	5197	
5°	5197	5177	5122	5162	5152	493
15°	4947	4918	4852	4872	4848	1393
25°	4477	4438	4353	4362	4353	2060
35°	3863	3813	3733	3703	3678	2412
45°	3143	3108	3033	2979	2958	2426
55°	2379	2349	2289	2229	2204	2127
65°	1604	1574	1524	1479	1454	1586
75°	839	830	804	775	785	896
85°	205	200	195	180	175	228
90°	2	20	32	41	44	18
95°	106	52	64	72	70	125
105°	496	545	100	117	124	530
115°	938	965	1006	251	134	923
125°	1326	1347	1378	1390	1394	1182
135°	1641	1667	1681	1698	1694	1267
145°	1903	1902	1929	1941	1932	1190
155°	2096	2081	2100	2110	2097	966
165°	2208	2198	2203	2215	2203	624
175°	2259	2247	2250	2262	2246	215
180°	2254	2254	2254	2254	2254	

TEST NUMBER: P926017

CATALOG NUMBER: DFN2DIP-SQ4F0-140D070US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5196.9	5196.9	5196.9	5196.9	5196.9
2.5°	5227.1	5202.2	5147.0	5196.9	5187.4
5°	5196.9	5177.3	5122.1	5161.9	5152.4
7.5°	5161.9	5132.2	5077.1	5117.4	5107.2
10°	5107.2	5072.3	5012.4	5052.2	5037.3
12.5°	5032.0	5002.3	4942.4	4967.3	4957.3
15°	4947.2	4917.5	4852.2	4872.5	4847.5
17.5°	4842.2	4812.5	4747.3	4772.2	4747.3
20°	4727.2	4697.5	4627.5	4642.4	4622.7
22.5°	4612.6	4567.6	4502.3	4502.3	4492.3
25°	4477.4	4437.6	4352.8	4362.4	4352.8
27.5°	4327.3	4292.4	4227.7	4212.9	4188.0
30°	4177.9	4137.6	4062.8	4048.0	4027.8
32.5°	4017.8	3988.1	3908.0	3877.8	3857.6
35°	3862.9	3813.1	3733.0	3702.9	3677.9
37.5°	3688.0	3642.9	3562.8	3527.9	3502.9
40°	3508.2	3468.0	3387.8	3343.4	3323.2
42.5°	3333.3	3293.0	3213.5	3163.1	3133.4
45°	3143.4	3108.5	3033.2	2978.6	2958.4
47.5°	2958.4	2923.4	2843.4	2788.3	2758.6
50°	2763.4	2738.5	2668.4	2598.4	2573.5
52.5°	2573.5	2538.5	2473.8	2418.7	2383.8
55°	2379.0	2348.7	2288.8	2228.9	2204.0
57.5°	2183.8	2158.9	2093.7	2033.8	2013.6
60°	1988.7	1969.2	1899.1	1844.0	1829.1
62.5°	1799.0	1763.9	1714.1	1664.3	1644.1
65°	1604.3	1574.1	1524.3	1479.2	1454.3
67.5°	1404.5	1379.0	1334.5	1299.4	1279.3
70°	1219.4	1199.3	1154.2	1119.2	1099.6
72.5°	1029.7	1009.4	984.5	949.6	934.7
75°	839.3	829.8	804.3	774.6	784.7
77.5°	669.6	649.5	639.4	624.6	609.7
80°	500.0	494.6	484.6	469.7	459.6
82.5°	339.8	339.8	335.0	314.9	314.9
85°	204.6	199.9	195.1	179.7	175.0
87.5°	90.2	80.0	70.0	55.1	49.8
90°	1.5	19.6	32.5	40.8	44.0
92.5°	40.8	34.2	39.1	42.5	44.0
95°	105.9	52.1	63.5	71.8	70.1
97.5°	190.7	57.1	83.1	88.1	89.7
100°	288.8	65.3	92.9	105.9	109.2
102.5°	396.2	393.1	96.3	114.1	119.1
105°	495.8	544.7	99.5	117.3	123.9
107.5°	611.5	652.2	102.8	120.7	127.3
110°	722.6	756.6	285.4	122.4	128.8

TEST NUMBER: P926017

CATALOG NUMBER: DFN2DIP-SQ4F0-140D070US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	826.9	856.1	828.5	125.5	130.5
115°	937.7	965.4	1006.2	251.2	133.8
117.5°	1033.9	1066.5	1094.3	861.0	433.8
120°	1141.6	1166.0	1195.5	1215.0	994.8
122.5°	1232.8	1258.9	1291.7	1301.4	1303.1
125°	1325.8	1347.0	1378.1	1389.5	1394.3
127.5°	1410.6	1433.4	1458.0	1474.3	1475.8
130°	1490.5	1516.7	1534.5	1552.5	1551.0
132.5°	1572.1	1593.4	1611.2	1625.9	1624.4
135°	1640.6	1666.7	1681.3	1697.7	1694.5
137.5°	1712.2	1731.9	1748.3	1764.6	1759.7
140°	1782.4	1795.5	1813.4	1828.1	1819.9
142.5°	1841.2	1852.7	1873.8	1886.7	1878.6
145°	1903.2	1901.5	1929.2	1940.6	1932.5
147.5°	1956.8	1952.1	1979.7	1987.8	1981.5
150°	2009.1	1997.8	2023.9	2033.5	2025.4
152.5°	2053.1	2040.1	2064.6	2074.4	2063.0
155°	2095.6	2081.0	2100.5	2110.2	2097.3
157.5°	2129.8	2116.8	2131.5	2143.0	2129.8
160°	2159.3	2149.4	2159.3	2168.9	2157.5
162.5°	2185.2	2175.5	2183.6	2195.1	2180.4
165°	2208.0	2198.4	2203.2	2214.6	2203.2
167.5°	2226.1	2216.1	2221.2	2232.6	2218.0
170°	2240.8	2230.9	2234.2	2245.6	2230.9
172.5°	2250.5	2240.8	2244.1	2255.4	2240.8
175°	2258.6	2247.1	2250.5	2261.8	2245.6
177.5°	2261.8	2250.5	2252.2	2263.7	2248.9
180°	2253.7	2253.7	2253.7	2253.7	2253.7

TEST NUMBER: P926017

CATALOG NUMBER: DFN2DIP-SQ4F0-140D070US950-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.19	14.23	13.99	15.05	16.06	12.75	13.78	13.55	14.60	15.62
	3H	14.87	15.80	15.68	16.63	17.67	14.38	15.31	15.19	16.14	17.18
	4H	15.47	16.35	16.30	17.18	18.24	14.97	15.85	15.80	16.69	17.74
	6H	15.88	16.69	16.72	17.54	18.60	15.38	16.19	16.22	17.04	18.10
	8H	15.99	16.76	16.84	17.63	18.69	15.49	16.26	16.34	17.13	18.19
	12H	16.05	16.78	16.90	17.64	18.73	15.54	16.27	16.39	17.13	18.22
4H	2H	13.67	14.55	14.51	15.39	16.44	13.32	14.20	14.15	15.04	16.09
	3H	15.56	16.29	16.41	17.17	18.23	15.15	15.89	16.00	16.76	17.82
	4H	16.29	16.95	17.14	17.82	18.92	15.86	16.53	16.72	17.40	18.49
	6H	16.81	17.39	17.69	18.29	19.38	16.38	16.96	17.26	17.85	18.95
	8H	16.97	17.51	17.85	18.40	19.51	16.53	17.07	17.41	17.96	19.07
	12H	17.05	17.54	17.95	18.45	19.56	16.60	17.09	17.50	18.00	19.11
8H	4H	16.50	17.04	17.37	17.92	19.03	16.12	16.66	17.00	17.55	18.66
	6H	17.14	17.59	18.04	18.52	19.63	16.76	17.20	17.66	18.13	19.24
	8H	17.36	17.76	18.28	18.68	19.81	16.97	17.37	17.89	18.29	19.42
	12H	17.51	17.86	18.43	18.77	19.95	17.10	17.45	18.01	18.36	19.54
12H	4H	16.49	16.98	17.39	17.88	19.00	16.12	16.61	17.02	17.52	18.63
	6H	17.17	17.57	18.09	18.49	19.62	16.80	17.20	17.71	18.12	19.25
	8H	17.42	17.77	18.34	18.69	19.87	17.04	17.39	17.96	18.31	19.49