

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906996

Luminaire Tested: DFN2DIP-TR2F0-020D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906996
REPORT IS A COMBINATION OF REPORTS P900241 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-020D040US835-FLLFLL
Description: 2 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5520.0 lumens
Efficiency: N/A
Efficacy: 123.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 44.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906996

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US835-FLLFLL

Luminous Intensity Polar Plot

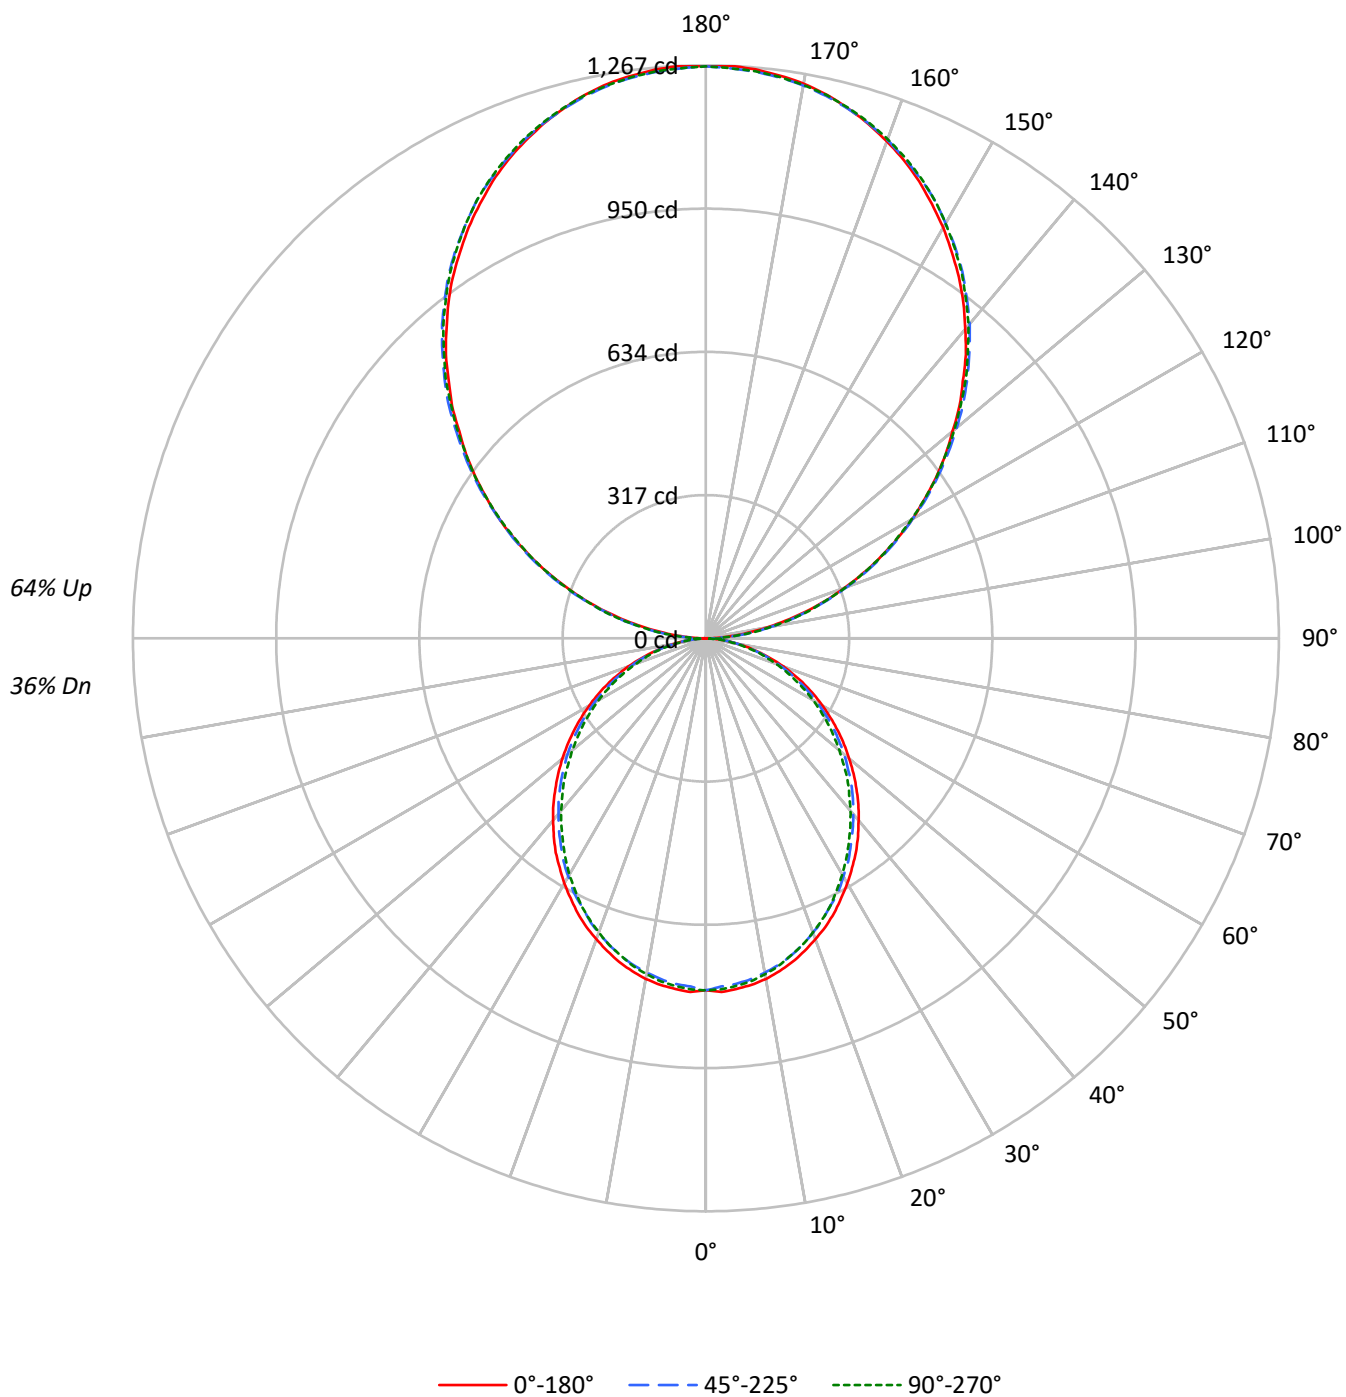

TEST NUMBER: P906996

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43
1	95	90	87	83	85	82	79	76	66	64	62	52	50	49	38	37	36
2	86	79	73	68	78	72	66	62	58	54	51	45	43	41	34	32	31
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	27	24	22
5	66	54	47	41	59	50	43	38	40	35	31	32	28	25	24	22	20
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17
7	56	44	36	31	50	40	33	28	33	28	24	26	22	20	20	17	15
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1736	1736	1736
5°	1736	1708	1720
10°	1719	1681	1694
15°	1691	1649	1654
20°	1655	1607	1614
25°	1618	1557	1568
30°	1573	1511	1511
35°	1530	1456	1450
40°	1477	1401	1392
45°	1424	1346	1332
50°	1367	1288	1264
55°	1306	1220	1199
60°	1238	1141	1126
65°	1162	1058	1040
70°	1067	957	947
75°	935	836	856
80°	776	683	692
85°	528	430	430

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1650 cd/sqm

TEST NUMBER: P906996

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.2	1.3
10°-20°	206.1	3.7
20°-30°	302.9	5.5
30°-40°	351.8	6.4
40°-50°	351.3	6.4
50°-60°	306.3	5.5
60°-70°	226.5	4.1
70°-80°	128.1	2.3
80°-90°	37.4	0.7
90°-100°	78.3	1.4
100°-110°	248.7	4.5
110°-120°	425.6	7.7
120°-130°	559.8	10.1
130°-140°	628.3	11.4
140°-150°	616.2	11.2
150°-160°	516.9	9.4
160°-170°	342.8	6.2
170°-180°	119.8	2.2
0°-30°	582.2	10.5
0°-40°	934.0	16.9
0°-60°	1591.6	28.8
0°-90°	1983.6	35.9
90°-120°	752.7	13.6
90°-150°	2556.9	46.3
90°-180°	3536.0	64.1
0°-180°	5520.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	778	778	778	778	778	
5°	778	775	767	773	772	74
15°	741	736	727	730	726	209
25°	670	664	652	653	652	309
35°	578	571	559	554	551	361
45°	471	466	454	446	443	363
55°	356	352	343	334	330	318
65°	240	236	228	222	218	238
75°	126	124	120	116	118	134
85°	31	30	29	27	26	34
90°	1	14	37	35	36	5
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	

TEST NUMBER: P906996

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	778.2	778.2	778.2	778.2	778.2
2.5°	782.7	779.0	770.7	778.2	776.8
5°	778.2	775.3	767.0	773.0	771.5
7.5°	773.0	768.5	760.3	766.3	764.8
10°	764.8	759.6	750.6	756.5	754.3
12.5°	753.5	749.1	740.1	743.8	742.3
15°	740.8	736.4	726.6	729.6	725.9
17.5°	725.1	720.7	710.9	714.6	710.9
20°	707.9	703.4	692.9	695.2	692.2
22.5°	690.7	684.0	674.2	674.2	672.7
25°	670.5	664.5	651.8	653.2	651.8
27.5°	648.0	642.8	633.1	630.9	627.1
30°	625.6	619.6	608.4	606.2	603.1
32.5°	601.6	597.2	585.2	580.7	577.7
35°	578.5	571.0	559.0	554.5	550.7
37.5°	552.3	545.5	533.5	528.3	524.5
40°	525.3	519.3	507.3	500.7	497.6
42.5°	499.1	493.1	481.2	473.7	469.2
45°	470.7	465.5	454.2	446.0	443.0
47.5°	443.0	437.8	425.8	417.5	413.1
50°	413.8	410.1	399.6	389.1	385.4
52.5°	385.4	380.1	370.4	362.2	357.0
55°	356.2	351.7	342.7	333.8	330.0
57.5°	327.0	323.3	313.5	304.6	301.5
60°	297.8	294.9	284.4	276.1	273.9
62.5°	269.4	264.1	256.7	249.2	246.2
65°	240.2	235.7	228.3	221.5	217.8
67.5°	210.3	206.5	199.8	194.6	191.6
70°	182.6	179.6	172.8	167.6	164.7
72.5°	154.2	151.2	147.4	142.2	140.0
75°	125.7	124.3	120.4	116.0	117.5
77.5°	100.3	97.3	95.7	93.5	91.3
80°	74.9	74.1	72.6	70.3	68.8
82.5°	50.9	50.9	50.2	47.2	47.2
85°	30.6	29.9	29.2	26.9	26.2
87.5°	13.5	12.0	10.5	8.3	7.5
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8

TEST NUMBER: P906996

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0

TEST NUMBER: P906996

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.60	8.34	8.66	9.41	10.87	7.17	7.92	8.24	8.99	10.45
	3H	9.22	9.89	10.30	10.97	12.45	8.76	9.43	9.84	10.51	11.99
	4H	9.79	10.43	10.88	11.51	12.99	9.33	9.97	10.42	11.05	12.53
	6H	10.17	10.75	11.26	11.84	13.33	9.71	10.29	10.80	11.38	12.87
	8H	10.26	10.82	11.36	11.92	13.40	9.80	10.36	10.90	11.46	12.95
	12H	10.29	10.82	11.40	11.92	13.43	9.83	10.36	10.94	11.45	12.97
4H	2H	8.03	8.67	9.13	9.75	11.23	7.70	8.33	8.79	9.41	10.90
	3H	9.86	10.39	10.96	11.50	13.00	9.48	10.01	10.58	11.12	12.61
	4H	10.55	11.04	11.66	12.14	13.65	10.16	10.65	11.27	11.74	13.26
	6H	11.04	11.46	12.15	12.58	14.09	10.64	11.06	11.76	12.18	13.69
	8H	11.18	11.57	12.29	12.68	14.20	10.78	11.17	11.89	12.28	13.81
	12H	11.23	11.59	12.36	12.71	14.24	10.83	11.18	11.96	12.30	13.84
8H	4H	10.73	11.12	11.84	12.23	13.76	10.38	10.77	11.49	11.88	13.41
	6H	11.33	11.65	12.47	12.81	14.33	10.98	11.30	12.11	12.45	13.98
	8H	11.53	11.82	12.68	12.95	14.49	11.18	11.46	12.32	12.59	14.14
	12H	11.64	11.89	12.79	13.02	14.60	11.27	11.52	12.42	12.65	14.23
12H	4H	10.71	11.06	11.84	12.19	13.72	10.36	10.72	11.50	11.84	13.37
	6H	11.35	11.64	12.50	12.77	14.31	11.01	11.29	12.15	12.43	13.97
	8H	11.57	11.82	12.72	12.95	14.53	11.23	11.47	12.37	12.61	14.18

END OF REPORT