

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907078

Luminaire Tested: DFN2DIP-TR2F0-060D040US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907078
REPORT IS A COMBINATION OF REPORTS P900250 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-060D040US835-RLLFLL
Description: 2 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8640.0 lumens
Efficiency: N/A
Efficacy: 97.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 88.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907078

CATALOG NUMBER: DFN2DIP-TR2F0-060D040US835-RLLFLL

Luminous Intensity Polar Plot

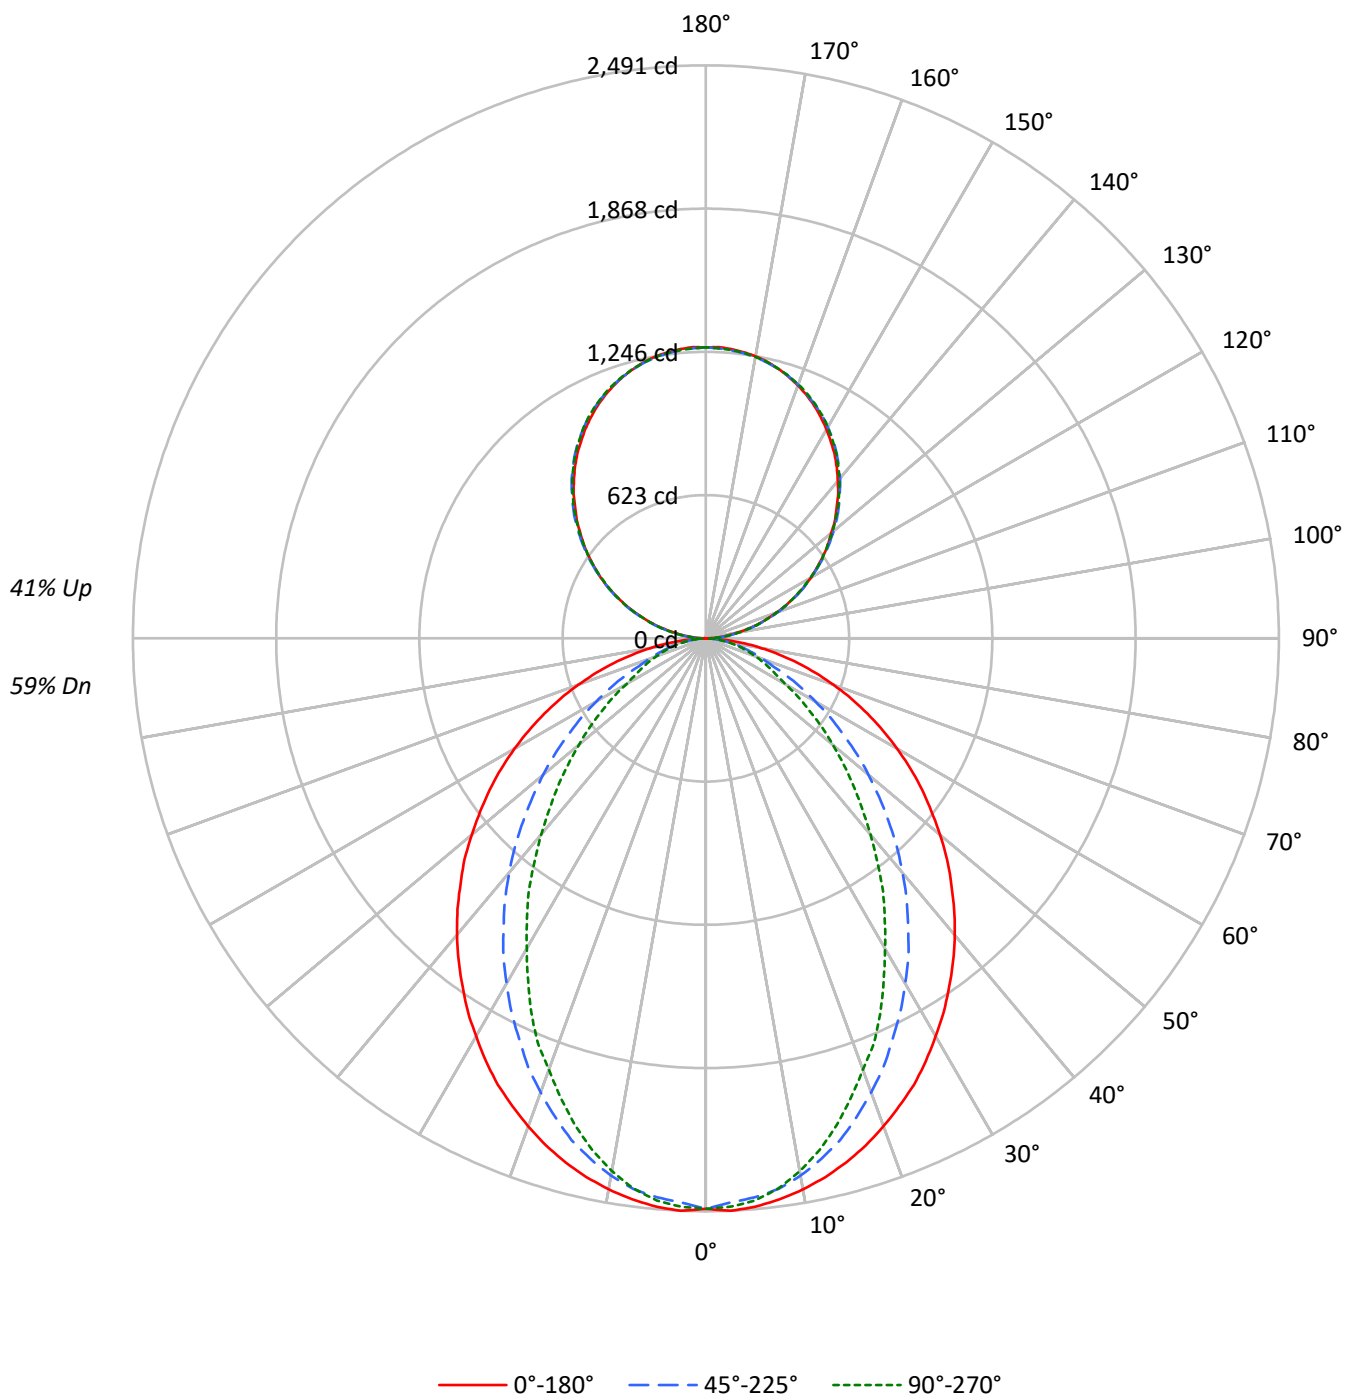

TEST NUMBER: P907078

CATALOG NUMBER: DFN2DIP-TR2F0-060D040US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56
2	92	85	79	74	86	79	74	70	69	65	62	60	57	55	52	50	48
3	84	75	68	62	78	70	64	59	62	57	53	54	50	47	46	44	41
4	77	67	59	53	72	63	56	51	55	50	46	48	44	41	42	39	36
5	71	60	52	46	66	56	49	44	50	44	40	44	39	36	38	34	32
6	66	54	46	40	61	51	44	39	45	39	35	40	35	32	35	31	28
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25
8	57	45	37	32	53	42	35	30	38	32	28	33	29	25	29	26	23
9	53	41	34	29	50	39	32	27	35	29	25	31	26	23	27	24	21
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	25	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5531	5531	5531
5°	5532	5431	5469
10°	5469	5312	5281
15°	5385	5124	4997
20°	5277	4871	4652
25°	5167	4589	4320
30°	5021	4301	3901
35°	4878	3993	3533
40°	4732	3675	3113
45°	4564	3325	2733
50°	4389	2972	2362
55°	4205	2597	2007
60°	3992	2206	1643
65°	3746	1810	1468
70°	3448	1441	1315
75°	3073	1247	1178
80°	2532	1012	993
85°	1662	627	699

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4564 cd/sqm

TEST NUMBER: P907078

CATALOG NUMBER: DFN2DIP-TR2F0-060D040US835-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	2.7
10°-20°	638.0	7.4
20°-30°	895.7	10.4
30°-40°	976.4	11.3
40°-50°	897.4	10.4
50°-60°	704.8	8.2
60°-70°	458.8	5.3
70°-80°	236.1	2.7
80°-90°	63.9	0.7
90°-100°	78.3	0.9
100°-110°	248.7	2.9
110°-120°	425.6	4.9
120°-130°	559.8	6.5
130°-140°	628.3	7.3
140°-150°	616.2	7.1
150°-160°	516.9	6.0
160°-170°	342.8	4.0
170°-180°	119.8	1.4
0°-30°	1766.2	20.4
0°-40°	2742.6	31.7
0°-60°	4344.8	50.3
0°-90°	5103.6	59.1
90°-120°	752.7	8.7
90°-150°	2556.9	29.6
90°-180°	3536.0	40.9
0°-180°	8640.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	1	14	37	35	36	8
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	

TEST NUMBER: P907078

CATALOG NUMBER: DFN2DIP-TR2F0-060D040US835-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8

TEST NUMBER: P907078

CATALOG NUMBER: DFN2DIP-TR2F0-060D040US835-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0

TEST NUMBER: P907078

CATALOG NUMBER: DFN2DIP-TR2F0-060D040US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.77	14.68	14.65	15.58	16.71	9.75	10.66	10.63	11.56	12.70
	3H	15.43	16.24	16.32	17.15	18.31	10.93	11.74	11.82	12.65	13.81
	4H	16.02	16.79	16.93	17.70	18.88	11.37	12.14	12.28	13.05	14.23
	6H	16.43	17.14	17.35	18.06	19.24	11.68	12.39	12.60	13.31	14.50
	8H	16.55	17.22	17.48	18.16	19.34	11.77	12.44	12.70	13.38	14.56
	12H	16.60	17.24	17.54	18.17	19.38	11.81	12.45	12.74	13.38	14.59
4H	2H	13.79	14.56	14.71	15.47	16.65	10.34	11.11	11.26	12.02	13.20
	3H	15.60	16.24	16.53	17.18	18.37	11.68	12.32	12.61	13.26	14.45
	4H	16.28	16.86	17.21	17.80	19.01	12.22	12.80	13.15	13.74	14.95
	6H	16.77	17.27	17.72	18.24	19.45	12.62	13.12	13.57	14.09	15.30
	8H	16.94	17.41	17.89	18.36	19.59	12.75	13.21	13.70	14.17	15.40
	12H	17.02	17.44	17.99	18.42	19.65	12.80	13.23	13.77	14.20	15.43
8H	4H	16.25	16.71	17.20	17.67	18.90	12.49	12.96	13.44	13.91	15.14
	6H	16.79	17.18	17.77	18.18	19.40	12.99	13.37	13.97	14.37	15.60
	8H	16.99	17.33	17.98	18.32	19.57	13.17	13.51	14.15	14.50	15.74
	12H	17.12	17.42	18.11	18.40	19.69	13.28	13.58	14.27	14.56	15.85
12H	4H	16.20	16.62	17.17	17.60	18.83	12.49	12.91	13.46	13.89	15.12
	6H	16.76	17.11	17.75	18.09	19.34	13.03	13.37	14.02	14.36	15.61
	8H	16.97	17.27	17.96	18.25	19.55	13.23	13.53	14.22	14.51	15.81