

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909727

Luminaire Tested: DFN2DIP-TR2F0-020D040US840-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909727
REPORT IS A COMBINATION OF REPORTS P901762 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-020D040US840-RLLONL
Description: 2 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5291.7 lumens
Efficiency: N/A
Efficacy: 118.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 44.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909727

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US840-RLLONL

Luminous Intensity Polar Plot

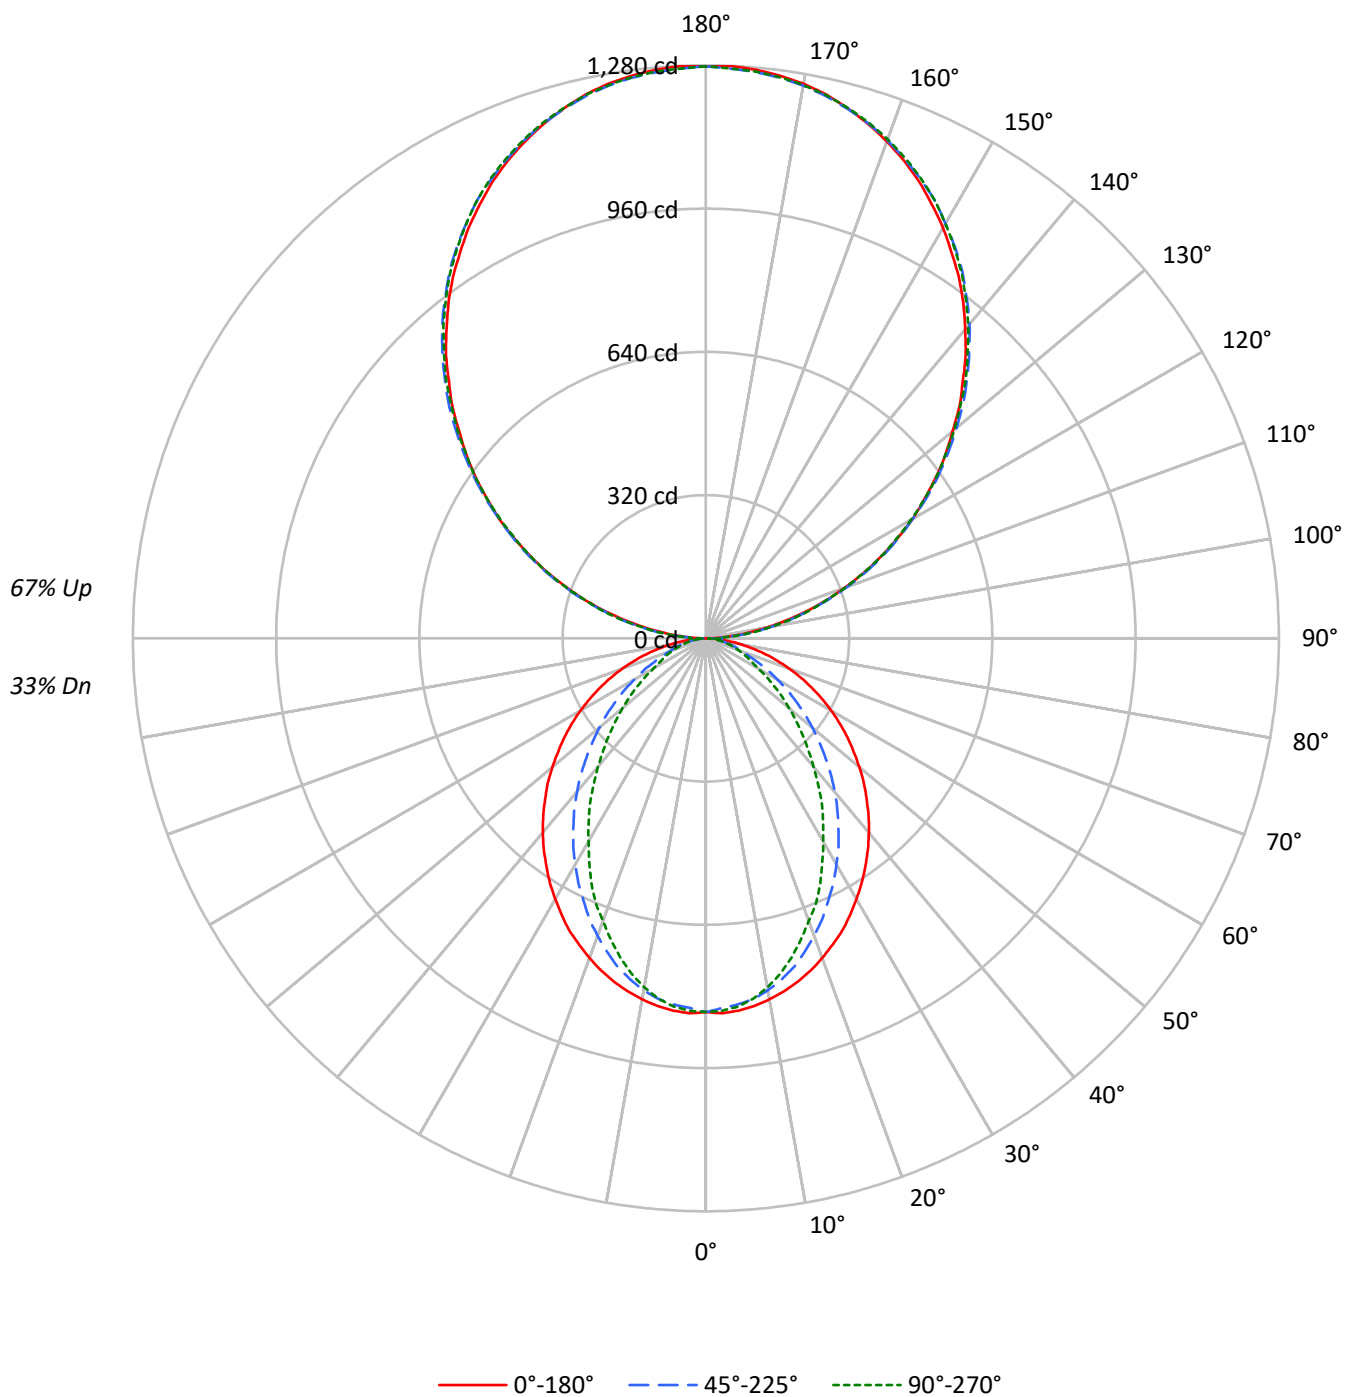

TEST NUMBER: P909727

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1862	1862	1862
5°	1862	1828	1841
10°	1841	1788	1778
15°	1813	1725	1682
20°	1776	1640	1566
25°	1739	1545	1454
30°	1690	1448	1313
35°	1642	1344	1189
40°	1593	1237	1048
45°	1536	1119	920
50°	1478	1000	795
55°	1415	874	675
60°	1344	743	553
65°	1261	610	494
70°	1160	485	443
75°	1034	419	396
80°	852	341	334
85°	559	211	235

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1669 cd/sqm

TEST NUMBER: P909727

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US840-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.2	1.5
10°-20°	214.8	4.1
20°-30°	301.5	5.7
30°-40°	328.7	6.2
40°-50°	302.1	5.7
50°-60°	237.3	4.5
60°-70°	154.4	2.9
70°-80°	79.5	1.5
80°-90°	23.9	0.5
90°-100°	79.1	1.5
100°-110°	251.2	4.7
110°-120°	429.8	8.1
120°-130°	565.3	10.7
130°-140°	634.5	12.0
140°-150°	622.2	11.8
150°-160°	522.0	9.9
160°-170°	346.2	6.5
170°-180°	121.0	2.3
0°-30°	594.5	11.2
0°-40°	923.2	17.4
0°-60°	1462.6	27.6
0°-90°	1720.4	32.5
90°-120°	760.1	14.4
90°-150°	2582.2	48.8
90°-180°	3571.0	67.5
0°-180°	5291.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	835	835	835	835	835	
5°	835	831	821	828	826	79
15°	794	786	760	746	738	224
25°	721	696	647	616	604	331
35°	621	582	516	468	452	389
45°	508	457	378	324	306	392
55°	386	327	246	200	186	345
65°	261	199	132	106	104	258
75°	139	86	60	55	54	147
85°	32	17	14	14	14	37
90°	1	14	38	35	37	5
95°	56	67	69	69	67	63
105°	232	235	237	239	239	245
115°	431	438	436	434	431	427
125°	627	637	634	630	629	561
135°	812	823	826	825	822	627
145°	985	993	999	1000	996	616
155°	1126	1130	1133	1138	1135	519
165°	1226	1224	1224	1232	1227	346
175°	1275	1272	1270	1278	1271	121
180°	1278	1278	1278	1278	1278	

TEST NUMBER: P909727

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	834.8	834.8	834.8	834.8	834.8
2.5°	838.5	834.8	826.4	834.0	832.5
5°	834.8	831.0	821.1	828.0	825.7
7.5°	828.0	823.4	812.8	815.9	812.0
10°	818.9	813.5	798.5	796.2	791.7
12.5°	807.6	800.7	780.3	775.9	767.5
15°	794.0	785.6	759.9	745.6	738.1
17.5°	778.1	766.0	734.3	717.6	705.6
20°	759.9	744.8	707.1	688.2	671.6
22.5°	740.3	723.0	679.1	653.5	642.2
25°	720.7	696.5	646.6	615.7	604.3
27.5°	697.3	671.6	616.4	580.9	563.5
30°	672.4	643.6	583.2	544.7	524.2
32.5°	648.1	613.4	551.5	506.1	487.3
35°	621.0	582.5	516.0	468.4	451.7
37.5°	594.5	552.9	482.7	430.6	411.7
40°	566.5	521.3	448.0	394.4	374.7
42.5°	537.9	489.6	413.2	357.3	338.5
45°	507.7	457.0	377.8	324.1	305.9
47.5°	479.0	425.4	343.8	290.0	273.5
50°	447.3	393.6	310.5	258.3	242.6
52.5°	416.2	359.5	278.7	228.9	214.6
55°	386.0	327.1	245.5	200.3	185.8
57.5°	355.1	294.6	216.1	173.8	161.7
60°	323.4	262.9	185.1	146.6	134.5
62.5°	292.4	232.0	158.6	122.4	116.3
65°	260.6	199.4	131.5	105.8	103.5
67.5°	230.5	169.2	105.8	92.9	90.7
70°	198.6	139.8	87.6	80.1	77.1
72.5°	168.4	112.5	73.2	67.3	65.7
75°	139.0	86.0	60.4	55.1	54.4
77.5°	109.6	61.2	47.6	44.5	43.0
80°	82.3	43.8	36.3	33.2	33.2
82.5°	57.4	29.5	24.9	23.4	23.4
85°	32.4	16.6	14.3	14.3	14.3
87.5°	12.1	6.1	6.1	5.3	5.3
90°	1.1	13.8	37.8	35.4	36.6
92.5°	23.8	32.3	33.5	34.6	34.6
95°	56.2	67.1	69.0	69.0	67.1
97.5°	93.6	103.6	107.9	107.9	107.9
100°	136.7	145.6	148.7	148.7	147.5
102.5°	182.2	188.7	193.0	194.1	193.0
105°	231.9	234.9	237.2	239.1	239.1
107.5°	281.1	285.8	285.8	286.5	281.1
110°	328.9	335.1	335.1	335.1	332.0

TEST NUMBER: P909727

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	380.5	387.1	385.9	382.8	380.5
115°	431.3	437.6	435.6	434.4	431.3
117.5°	481.8	490.3	484.9	481.8	478.8
120°	532.7	541.1	532.7	532.7	529.2
122.5°	578.9	589.7	584.3	581.2	578.9
125°	627.4	637.0	634.0	630.5	629.3
127.5°	674.8	686.7	682.5	677.8	674.8
130°	719.0	733.0	731.0	728.7	724.5
132.5°	768.7	779.5	780.3	774.9	771.8
135°	811.5	823.4	825.8	824.6	821.5
137.5°	859.3	868.9	870.8	870.0	865.5
140°	901.2	910.9	916.3	916.3	912.0
142.5°	944.4	954.0	957.0	958.3	954.0
145°	985.2	992.9	999.1	1000.3	996.0
147.5°	1021.8	1031.4	1036.0	1037.9	1033.7
150°	1059.6	1066.1	1070.4	1073.8	1070.4
152.5°	1093.1	1099.5	1105.0	1109.2	1105.0
155°	1126.5	1129.6	1133.1	1138.5	1135.0
157.5°	1155.5	1157.7	1159.6	1167.4	1162.0
160°	1181.2	1183.6	1184.7	1191.2	1186.6
162.5°	1205.1	1205.1	1206.3	1213.6	1208.2
165°	1225.6	1224.4	1224.4	1232.0	1226.7
167.5°	1244.1	1240.5	1240.5	1248.3	1242.8
170°	1257.9	1254.8	1253.6	1261.3	1254.8
172.5°	1267.5	1264.5	1263.2	1271.0	1264.5
175°	1275.3	1272.1	1269.8	1277.5	1271.0
177.5°	1279.5	1276.4	1274.0	1280.6	1274.0
180°	1277.5	1277.5	1277.5	1277.5	1277.5

TEST NUMBER: P909727

CATALOG NUMBER: DFN2DIP-TR2F0-020D040US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.28	7.98	8.38	9.07	10.58	3.26	3.97	4.36	5.06	6.56
	3H	8.92	9.55	10.03	10.65	12.17	4.42	5.05	5.53	6.16	7.68
	4H	9.51	10.11	10.63	11.21	12.73	4.86	5.46	5.97	6.56	8.08
	6H	9.90	10.45	11.03	11.56	13.10	5.16	5.71	6.28	6.81	8.35
	8H	10.02	10.54	11.15	11.66	13.19	5.24	5.76	6.37	6.88	8.41
	12H	10.06	10.56	11.20	11.67	13.23	5.27	5.76	6.40	6.88	8.43
4H	2H	7.28	7.87	8.40	8.98	10.50	3.83	4.43	4.95	5.53	7.05
	3H	9.07	9.56	10.20	10.69	12.23	5.15	5.65	6.28	6.77	8.31
	4H	9.73	10.19	10.87	11.31	12.87	5.68	6.13	6.81	7.25	8.81
	6H	10.22	10.61	11.36	11.75	13.30	6.07	6.46	7.21	7.60	9.15
	8H	10.38	10.75	11.52	11.88	13.44	6.19	6.55	7.33	7.69	9.25
	12H	10.46	10.79	11.61	11.93	13.50	6.24	6.57	7.39	7.71	9.28
8H	4H	9.69	10.05	10.83	11.19	12.75	5.93	6.30	7.07	7.43	9.00
	6H	10.23	10.53	11.39	11.70	13.26	6.42	6.72	7.58	7.90	9.46
	8H	10.43	10.69	11.59	11.84	13.43	6.60	6.86	7.77	8.02	9.60
	12H	10.54	10.77	11.71	11.93	13.54	6.70	6.93	7.87	8.08	9.70
12H	4H	9.63	9.97	10.79	11.11	12.68	5.93	6.26	7.08	7.40	8.97
	6H	10.20	10.46	11.37	11.62	13.20	6.47	6.73	7.63	7.88	9.47
	8H	10.40	10.63	11.57	11.78	13.40	6.66	6.89	7.83	8.04	9.66

END OF REPORT