

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912488

Luminaire Tested: DFN2DIP-TR2F0-040D030US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912488
REPORT IS A COMBINATION OF REPORTS P900235 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-040D030US850-FLLFLL
Description: 2 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7336.0 lumens
Efficiency: N/A
Efficacy: 126.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912488

CATALOG NUMBER: DFN2DIP-TR2F0-040D030US850-FLLFLL

Luminous Intensity Polar Plot

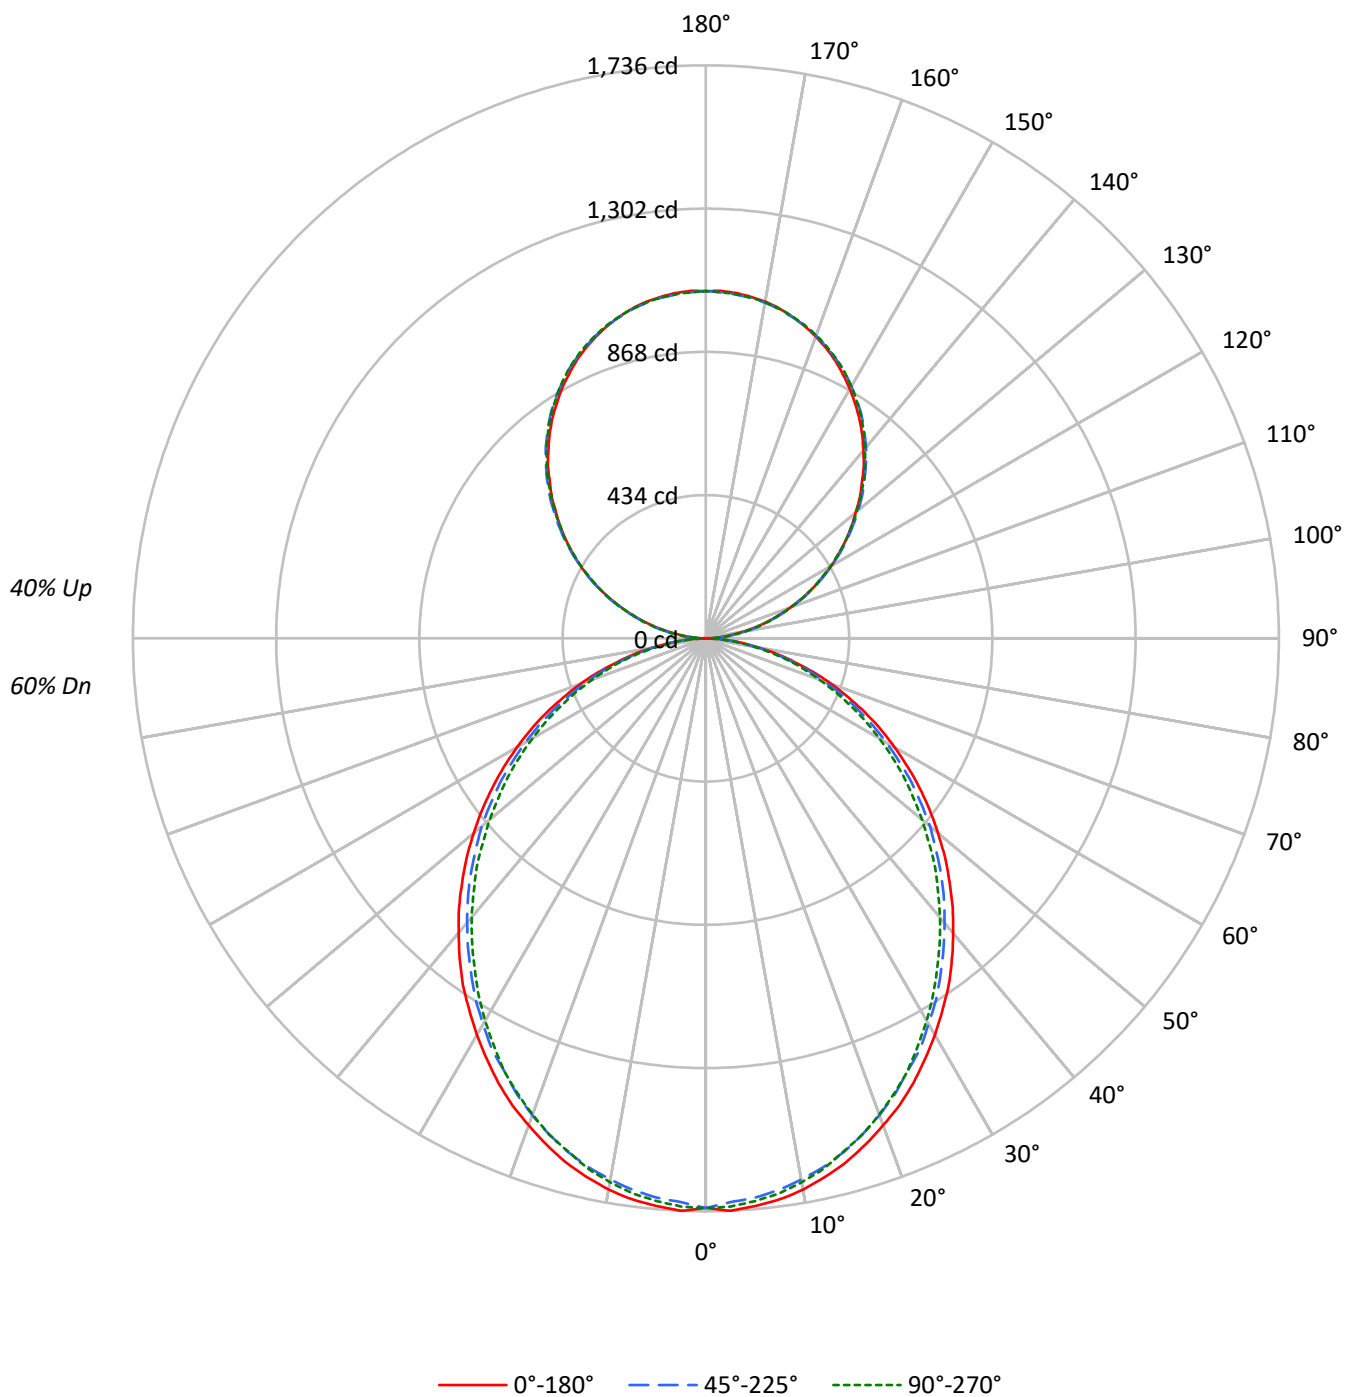

TEST NUMBER: P912488

CATALOG NUMBER: DFN2DIP-TR2F0-040D030US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	89	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	48	46
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	43	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	29	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3850	3850	3850
5°	3850	3788	3815
10°	3813	3728	3757
15°	3752	3658	3670
20°	3670	3564	3581
25°	3589	3454	3479
30°	3488	3350	3351
35°	3393	3230	3216
40°	3276	3108	3087
45°	3159	2985	2955
50°	3032	2856	2802
55°	2898	2707	2661
60°	2745	2531	2498
65°	2578	2347	2308
70°	2366	2124	2099
75°	2075	1856	1899
80°	1719	1513	1535
85°	1173	954	954

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3159 cd/sqm

TEST NUMBER: P912488

CATALOG NUMBER: DFN2DIP-TR2F0-040D030US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	2.2
10°-20°	457.1	6.2
20°-30°	671.7	9.2
30°-40°	780.2	10.6
40°-50°	779.2	10.6
50°-60°	679.5	9.3
60°-70°	502.3	6.8
70°-80°	284.2	3.9
80°-90°	78.0	1.1
90°-100°	65.1	0.9
100°-110°	206.9	2.8
110°-120°	354.0	4.8
120°-130°	465.6	6.3
130°-140°	522.6	7.1
140°-150°	512.5	7.0
150°-160°	429.9	5.9
160°-170°	285.1	3.9
170°-180°	99.7	1.4
0°-30°	1291.3	17.6
0°-40°	2071.5	28.2
0°-60°	3530.2	48.1
0°-90°	4394.6	59.9
90°-120°	626.0	8.5
90°-150°	2126.7	29.0
90°-180°	2941.0	40.1
0°-180°	7336.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	1	11	31	29	30	7
95°	46	55	57	57	55	52
105°	191	194	195	197	197	202
115°	355	360	359	358	355	351
125°	517	525	522	519	518	462
135°	668	678	680	679	677	517
145°	812	818	823	824	820	507
155°	928	930	933	938	935	427
165°	1009	1008	1008	1015	1010	285
175°	1050	1048	1046	1052	1047	100
180°	1052	1052	1052	1052	1052	

TEST NUMBER: P912488

CATALOG NUMBER: DFN2DIP-TR2F0-040D030US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	1.0	11.4	31.1	29.2	30.2
92.5°	19.6	26.6	27.6	28.5	28.5
95°	46.4	55.2	56.8	56.8	55.2
97.5°	77.1	85.3	88.8	88.8	88.8
100°	112.6	119.9	122.4	122.4	121.5
102.5°	150.0	155.5	158.9	159.9	158.9
105°	191.0	193.5	195.4	197.0	197.0
107.5°	231.6	235.3	235.3	236.0	231.6
110°	270.9	276.0	276.0	276.0	273.5

TEST NUMBER: P912488

CATALOG NUMBER: DFN2DIP-TR2F0-040D030US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	313.4	318.8	317.8	315.3	313.4
115°	355.3	360.3	358.8	357.9	355.3
117.5°	396.8	403.8	399.4	396.8	394.2
120°	438.7	445.7	438.7	438.7	435.8
122.5°	476.8	485.6	481.2	478.6	476.8
125°	516.8	524.7	522.1	519.2	518.3
127.5°	555.7	565.6	562.2	558.3	555.7
130°	592.2	603.6	602.1	600.2	596.6
132.5°	633.1	642.0	642.7	638.2	635.7
135°	668.4	678.2	680.1	679.2	676.6
137.5°	707.7	715.6	717.2	716.6	712.8
140°	742.3	750.2	754.7	754.7	751.1
142.5°	777.9	785.7	788.3	789.3	785.7
145°	811.5	817.8	822.9	823.8	820.3
147.5°	841.6	849.5	853.3	854.9	851.4
150°	872.7	878.1	881.5	884.4	881.5
152.5°	900.3	905.6	910.0	913.6	910.0
155°	927.9	930.3	933.2	937.7	934.9
157.5°	951.6	953.5	955.2	961.5	957.1
160°	972.9	974.8	975.8	981.1	977.4
162.5°	992.6	992.6	993.6	999.5	995.1
165°	1009.4	1008.4	1008.4	1014.7	1010.3
167.5°	1024.6	1021.7	1021.7	1028.0	1023.6
170°	1036.0	1033.5	1032.6	1038.9	1033.5
172.5°	1043.9	1041.5	1040.5	1046.8	1041.5
175°	1050.3	1047.8	1045.9	1052.2	1046.8
177.5°	1053.8	1051.2	1049.3	1054.8	1049.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2

TEST NUMBER: P912488

CATALOG NUMBER: DFN2DIP-TR2F0-040D030US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.69	13.65	13.56	14.54	15.66	12.27	13.23	13.14	14.12	15.24
	3H	14.34	15.20	15.22	16.09	17.24	13.88	14.74	14.76	15.63	16.78
	4H	14.91	15.73	15.81	16.63	17.79	14.45	15.27	15.35	16.17	17.33
	6H	15.30	16.05	16.21	16.96	18.13	14.84	15.59	15.75	16.50	17.67
	8H	15.40	16.11	16.31	17.04	18.21	14.94	15.65	15.85	16.58	17.75
	12H	15.44	16.12	16.36	17.04	18.24	14.98	15.66	15.90	16.58	17.78
4H	2H	13.16	13.97	14.06	14.87	16.03	12.82	13.63	13.72	14.53	15.69
	3H	15.00	15.68	15.92	16.62	17.79	14.62	15.30	15.53	16.23	17.41
	4H	15.70	16.32	16.63	17.25	18.45	15.31	15.93	16.23	16.86	18.06
	6H	16.20	16.74	17.14	17.69	18.89	15.81	16.34	16.74	17.30	18.49
	8H	16.34	16.84	17.28	17.79	19.00	15.95	16.44	16.88	17.39	18.61
	12H	16.41	16.86	17.37	17.83	19.05	16.00	16.45	16.96	17.42	18.64
8H	4H	15.90	16.40	16.84	17.35	18.56	15.55	16.05	16.48	16.99	18.21
	6H	16.51	16.92	17.47	17.91	19.12	16.15	16.57	17.12	17.56	18.77
	8H	16.71	17.08	17.69	18.06	19.29	16.35	16.72	17.33	17.70	18.93
	12H	16.83	17.15	17.81	18.13	19.41	16.46	16.78	17.44	17.76	19.04
12H	4H	15.89	16.34	16.84	17.30	18.52	15.54	15.99	16.50	16.96	18.18
	6H	16.53	16.90	17.51	17.88	19.11	16.19	16.56	17.16	17.54	18.77
	8H	16.76	17.08	17.74	18.06	19.33	16.41	16.74	17.39	17.71	18.99