

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915200

Luminaire Tested: DFN2DIP-TR2F0-030D040US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915200
REPORT IS A COMBINATION OF REPORTS P900243 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-030D040US927-FLLFLL
Description: 2 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5157.1 lumens
Efficiency: N/A
Efficacy: 94.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 54.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915200

CATALOG NUMBER: DFN2DIP-TR2F0-030D040US927-FLLFLL

Luminous Intensity Polar Plot

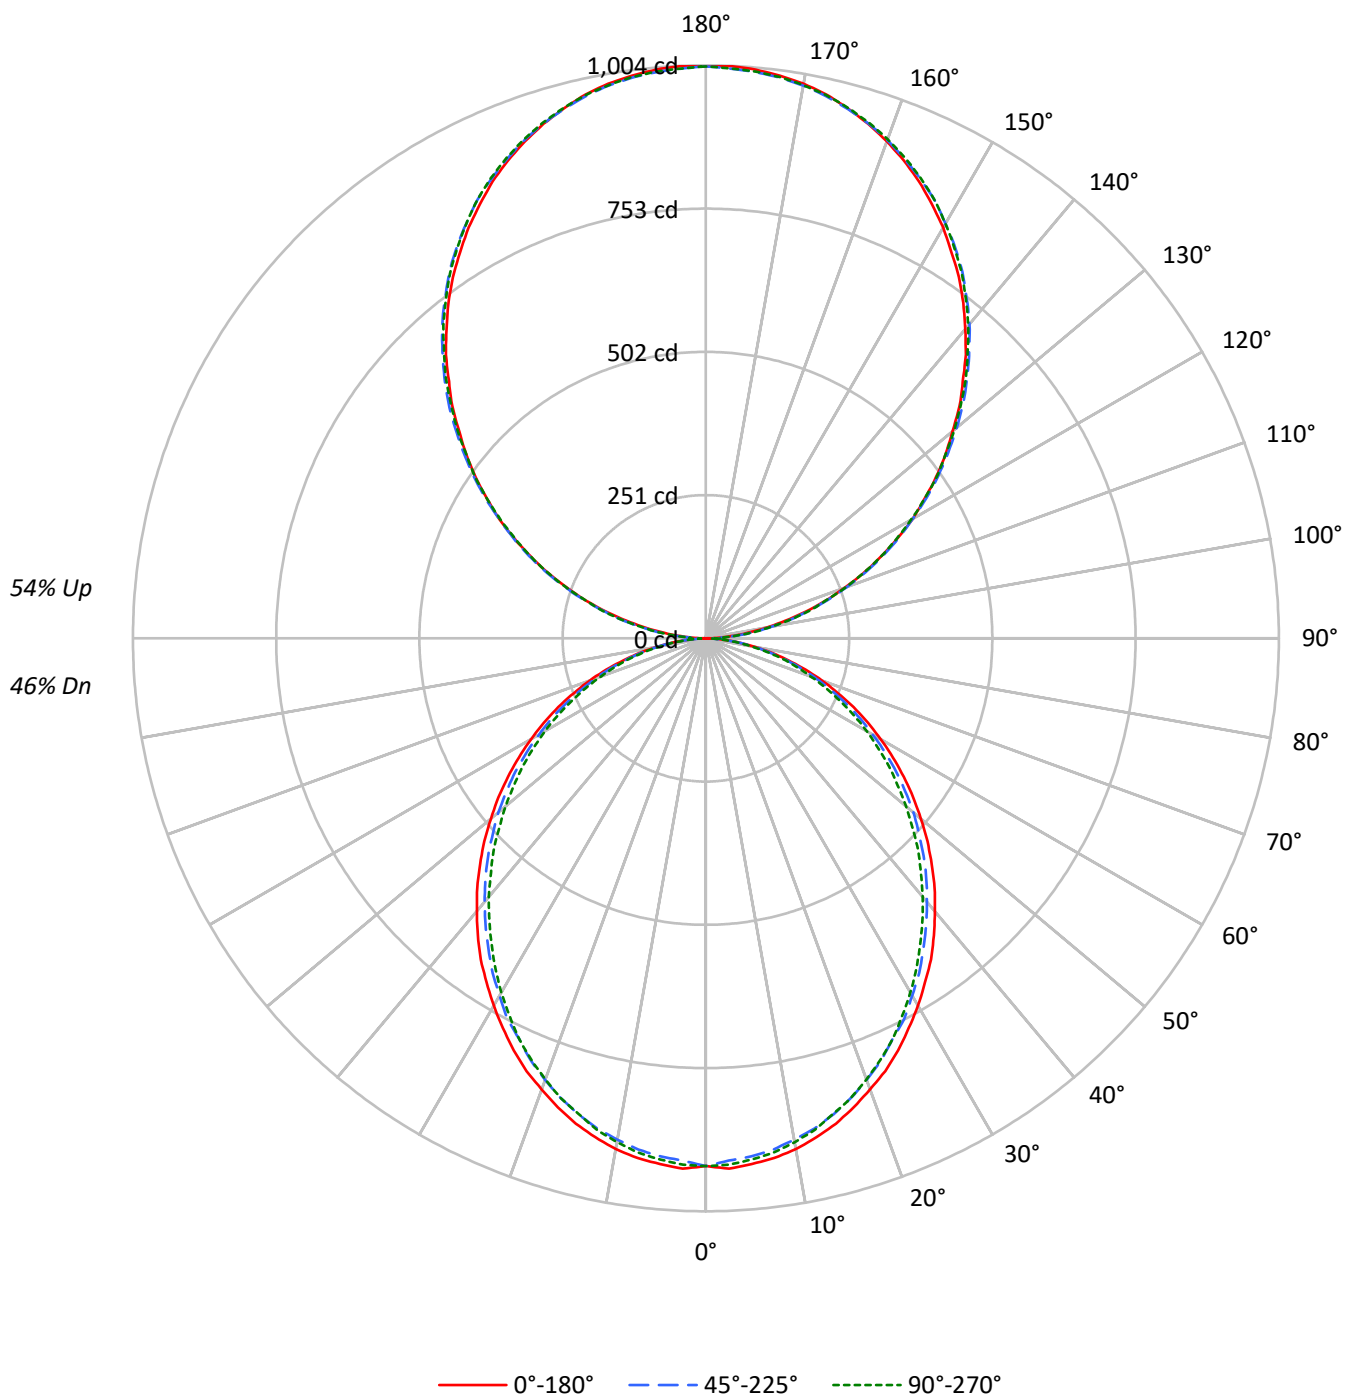

TEST NUMBER: P915200

CATALOG NUMBER: DFN2DIP-TR2F0-030D040US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	85	89	85	82	79	71	69	66	58	56	55	46	45	44
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	41	39	37
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	34	32
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27
5	67	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	46	39	34	39	34	30	33	28	25	26	23	21
7	57	45	37	32	53	42	35	30	36	30	26	30	25	22	24	21	19
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17
9	50	37	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2062	2062	2062
5°	2063	2029	2044
10°	2043	1997	2013
15°	2010	1960	1966
20°	1966	1910	1918
25°	1923	1850	1864
30°	1869	1795	1795
35°	1818	1730	1723
40°	1755	1665	1654
45°	1693	1599	1583
50°	1624	1530	1502
55°	1552	1450	1426
60°	1471	1356	1339
65°	1381	1257	1236
70°	1268	1138	1125
75°	1111	994	1018
80°	922	811	822
85°	628	511	510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1693 cd/sqm

TEST NUMBER: P915200

CATALOG NUMBER: DFN2DIP-TR2F0-030D040US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.0	1.7
10°-20°	244.9	4.7
20°-30°	359.9	7.0
30°-40°	418.0	8.1
40°-50°	417.5	8.1
50°-60°	364.0	7.1
60°-70°	269.1	5.2
70°-80°	152.3	3.0
80°-90°	43.0	0.8
90°-100°	62.0	1.2
100°-110°	197.0	3.8
110°-120°	337.2	6.5
120°-130°	443.5	8.6
130°-140°	497.8	9.7
140°-150°	488.1	9.5
150°-160°	409.5	7.9
160°-170°	271.5	5.3
170°-180°	94.9	1.8
0°-30°	691.8	13.4
0°-40°	1109.8	21.5
0°-60°	1891.3	36.7
0°-90°	2355.6	45.7
90°-120°	596.2	11.6
90°-150°	2025.6	39.3
90°-180°	2801.0	54.3
0°-180°	5157.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	925	925	925	925	925	
5°	925	921	911	918	917	88
15°	880	875	863	867	862	248
25°	797	790	774	776	774	367
35°	687	678	664	659	654	429
45°	559	553	540	530	526	432
55°	423	418	407	397	392	378
65°	286	280	271	263	259	282
75°	149	148	143	138	140	159
85°	36	36	35	32	31	41
90°	1	11	30	28	29	5
95°	44	53	54	54	53	49
105°	182	184	186	188	188	192
115°	338	343	342	341	338	335
125°	492	500	497	495	494	440
135°	637	646	648	647	644	492
145°	773	779	784	785	781	483
155°	884	886	889	893	890	407
165°	961	960	960	966	962	271
175°	1000	998	996	1002	997	95
180°	1002	1002	1002	1002	1002	

TEST NUMBER: P915200

CATALOG NUMBER: DFN2DIP-TR2F0-030D040US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	924.7	924.7	924.7	924.7	924.7
2.5°	930.1	925.7	915.8	924.7	923.0
5°	924.7	921.2	911.4	918.5	916.8
7.5°	918.5	913.2	903.4	910.6	908.8
10°	908.8	902.5	891.9	899.0	896.4
12.5°	895.4	890.1	879.5	883.8	882.1
15°	880.3	875.0	863.4	867.0	862.5
17.5°	861.6	856.3	844.7	849.1	844.7
20°	841.1	835.8	823.4	826.0	822.5
22.5°	820.8	812.8	801.1	801.1	799.3
25°	796.7	789.6	774.5	776.3	774.5
27.5°	770.0	763.7	752.3	749.6	745.2
30°	743.4	736.3	722.9	720.3	716.7
32.5°	714.9	709.6	695.4	690.0	686.4
35°	687.4	678.5	664.2	658.9	654.4
37.5°	656.2	648.2	634.0	627.7	623.3
40°	624.2	617.1	602.8	594.9	591.4
42.5°	593.1	586.0	571.8	562.8	557.5
45°	559.4	553.1	539.7	530.0	526.4
47.5°	526.4	520.2	506.0	496.1	490.8
50°	491.7	487.3	474.8	462.4	458.0
52.5°	458.0	451.7	440.2	430.4	424.1
55°	423.3	418.0	407.3	396.6	392.2
57.5°	388.6	384.1	372.6	361.9	358.3
60°	353.9	350.4	337.9	328.1	325.5
62.5°	320.1	313.9	305.0	296.1	292.6
65°	285.5	280.1	271.2	263.2	258.8
67.5°	249.9	245.4	237.4	231.2	227.7
70°	217.0	213.4	205.4	199.2	195.7
72.5°	183.2	179.6	175.2	169.0	166.4
75°	149.3	147.7	143.1	137.8	139.7
77.5°	119.1	115.6	113.8	111.1	108.5
80°	89.0	88.0	86.2	83.6	81.8
82.5°	60.4	60.4	59.7	56.0	56.0
85°	36.4	35.6	34.7	32.0	31.1
87.5°	16.0	14.3	12.4	9.8	8.9
90°	0.9	10.9	29.6	27.8	28.7
92.5°	18.7	25.3	26.3	27.2	27.2
95°	44.1	52.6	54.1	54.1	52.6
97.5°	73.4	81.3	84.6	84.6	84.6
100°	107.3	114.2	116.6	116.6	115.7
102.5°	142.9	148.1	151.4	152.3	151.4
105°	181.9	184.3	186.1	187.6	187.6
107.5°	220.5	224.2	224.2	224.7	220.5
110°	258.0	262.8	262.8	262.8	260.5

TEST NUMBER: P915200

CATALOG NUMBER: DFN2DIP-TR2F0-030D040US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	298.5	303.6	302.7	300.3	298.5
115°	338.3	343.3	341.7	340.8	338.3
117.5°	377.9	384.6	380.4	377.9	375.6
120°	417.9	424.5	417.9	417.9	415.1
122.5°	454.1	462.6	458.4	455.9	454.1
125°	492.2	499.7	497.3	494.6	493.7
127.5°	529.3	538.7	535.4	531.7	529.3
130°	564.0	575.0	573.5	571.6	568.3
132.5°	603.0	611.5	612.1	607.8	605.5
135°	636.6	645.9	647.8	646.8	644.4
137.5°	674.1	681.6	683.1	682.5	678.9
140°	706.9	714.5	718.7	718.7	715.4
142.5°	740.8	748.4	750.8	751.7	748.4
145°	772.9	778.9	783.7	784.7	781.3
147.5°	801.5	809.1	812.7	814.2	810.9
150°	831.2	836.3	839.6	842.3	839.6
152.5°	857.5	862.5	866.8	870.1	866.8
155°	883.7	886.1	888.8	893.1	890.3
157.5°	906.4	908.2	909.7	915.8	911.5
160°	926.6	928.4	929.3	934.5	930.8
162.5°	945.3	945.3	946.3	952.0	947.8
165°	961.4	960.4	960.4	966.5	962.3
167.5°	975.9	973.1	973.1	979.2	974.9
170°	986.7	984.3	983.4	989.4	984.3
172.5°	994.3	991.9	990.9	997.0	991.9
175°	1000.4	997.9	996.1	1002.1	997.0
177.5°	1003.7	1001.2	999.4	1004.6	999.4
180°	1002.1	1002.1	1002.1	1002.1	1002.1

TEST NUMBER: P915200

CATALOG NUMBER: DFN2DIP-TR2F0-030D040US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.24	10.07	10.24	11.07	12.40	8.82	9.64	9.81	10.65	11.98
	3H	10.88	11.62	11.88	12.63	13.98	10.42	11.16	11.42	12.17	13.52
	4H	11.45	12.15	12.46	13.16	14.52	10.99	11.69	12.01	12.71	14.07
	6H	11.83	12.47	12.85	13.49	14.87	11.37	12.01	12.39	13.03	14.41
	8H	11.92	12.53	12.95	13.57	14.94	11.46	12.08	12.50	13.12	14.48
	12H	11.96	12.54	13.00	13.57	14.97	11.50	12.08	12.53	13.11	14.51
4H	2H	9.69	10.39	10.71	11.41	12.77	9.35	10.05	10.38	11.07	12.43
	3H	11.53	12.11	12.56	13.16	14.53	11.14	11.73	12.17	12.77	14.15
	4H	12.22	12.75	13.26	13.79	15.19	11.83	12.36	12.86	13.40	14.79
	6H	12.71	13.17	13.76	14.23	15.62	12.32	12.78	13.36	13.84	15.23
	8H	12.85	13.28	13.90	14.33	15.74	12.45	12.88	13.50	13.93	15.34
	12H	12.91	13.30	13.98	14.36	15.78	12.50	12.89	13.57	13.96	15.37
8H	4H	12.40	12.83	13.45	13.89	15.29	12.05	12.48	13.10	13.54	14.94
	6H	13.01	13.36	14.08	14.46	15.86	12.65	13.01	13.73	14.10	15.51
	8H	13.21	13.52	14.29	14.60	16.03	12.85	13.17	13.93	14.25	15.67
	12H	13.32	13.60	14.41	14.67	16.14	12.96	13.23	14.04	14.30	15.77
12H	4H	12.38	12.77	13.45	13.84	15.25	12.04	12.43	13.11	13.50	14.91
	6H	13.03	13.34	14.11	14.42	15.85	12.69	13.00	13.77	14.08	15.50
	8H	13.25	13.53	14.34	14.60	16.07	12.91	13.18	13.99	14.26	15.72