

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920633

Luminaire Tested: DFN2DIP-TR2F0-020D030US935-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920633
REPORT IS A COMBINATION OF REPORTS P901751 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-020D030US935-FLLONL
Description: 2 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3990.7 lumens
Efficiency: N/A
Efficacy: 107.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 37
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920633

CATALOG NUMBER: DFN2DIP-TR2F0-020D030US935-FLLONL

Luminous Intensity Polar Plot

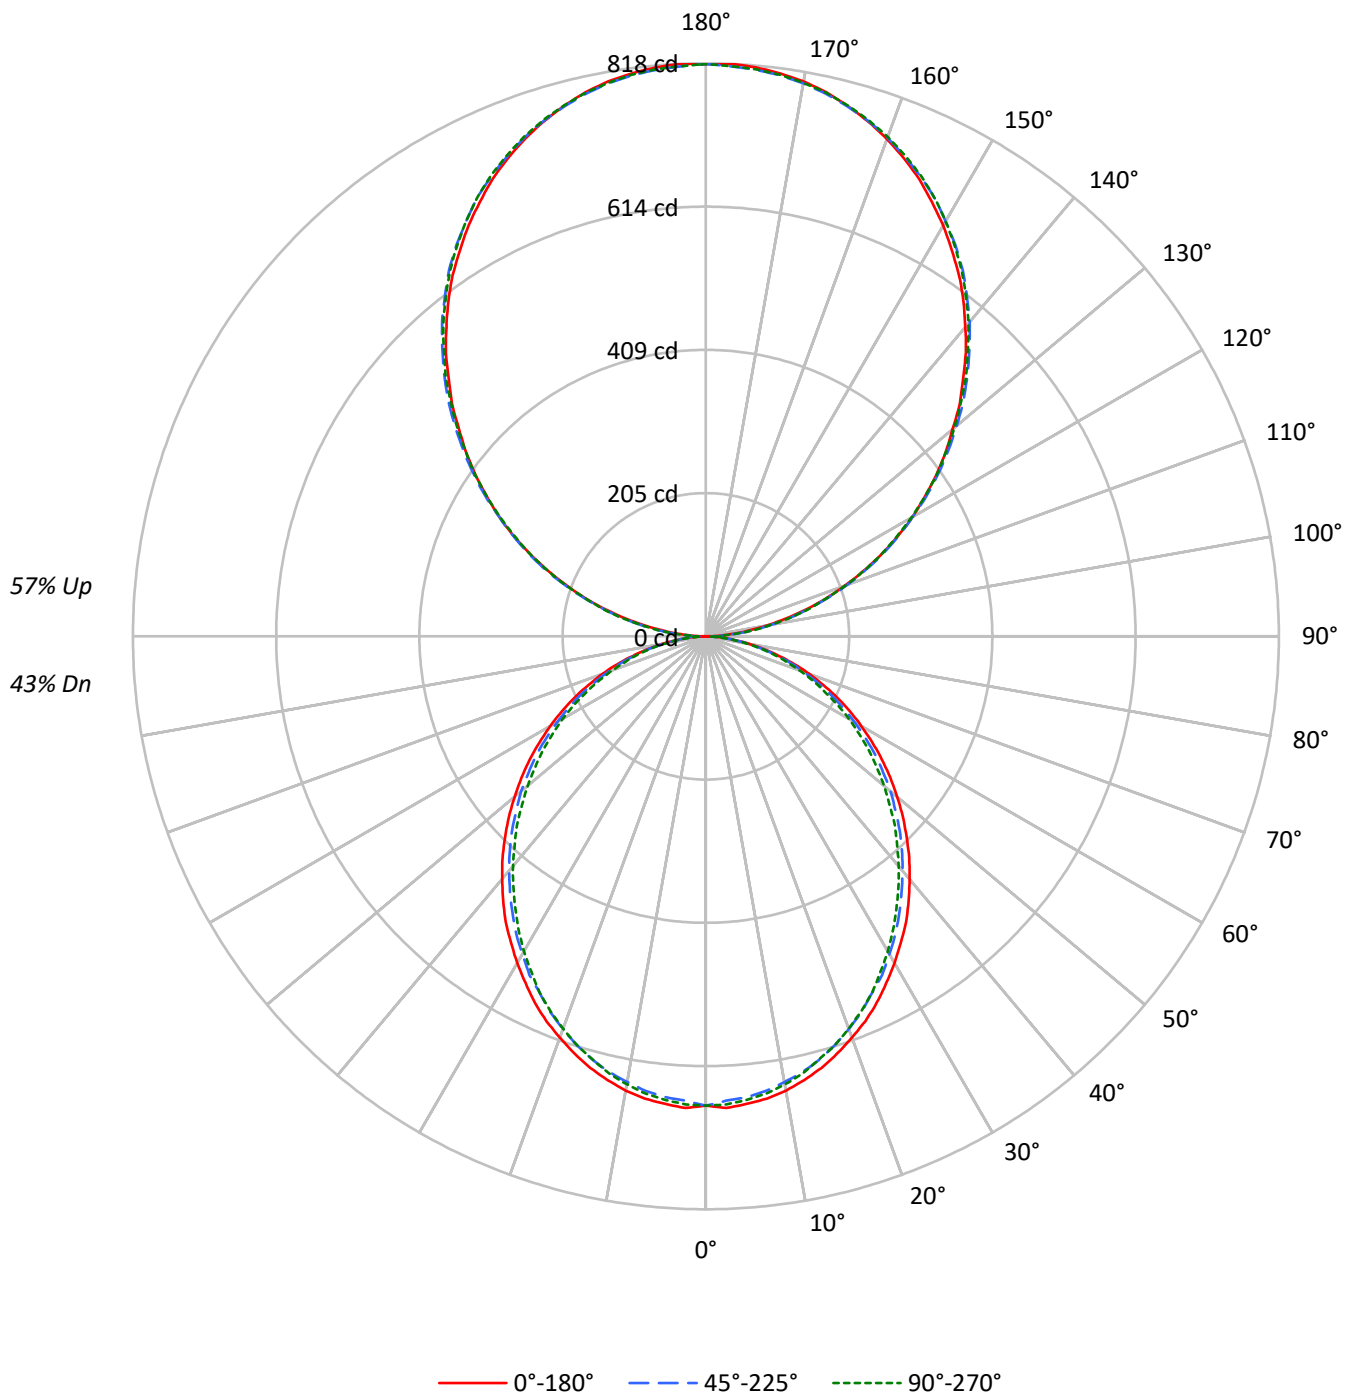

TEST NUMBER: P920633

CATALOG NUMBER: DFN2DIP-TR2F0-020D030US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1494	1494	1494
5°	1495	1470	1481
10°	1480	1447	1458
15°	1456	1420	1425
20°	1425	1384	1390
25°	1393	1341	1350
30°	1354	1301	1301
35°	1317	1254	1248
40°	1272	1206	1198
45°	1226	1159	1147
50°	1177	1109	1088
55°	1125	1051	1033
60°	1066	983	970
65°	1001	911	896
70°	918	824	815
75°	805	720	737
80°	668	588	595
85°	453	370	371

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1226 cd/sqm

TEST NUMBER: P920633

CATALOG NUMBER: DFN2DIP-TR2F0-020D030US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.1	1.6
10°-20°	177.4	4.4
20°-30°	260.8	6.5
30°-40°	302.9	7.6
40°-50°	302.5	7.6
50°-60°	263.8	6.6
60°-70°	195.0	4.9
70°-80°	110.3	2.8
80°-90°	31.4	0.8
90°-100°	50.6	1.3
100°-110°	160.6	4.0
110°-120°	274.9	6.9
120°-130°	361.5	9.1
130°-140°	405.7	10.2
140°-150°	397.9	10.0
150°-160°	333.8	8.4
160°-170°	221.3	5.5
170°-180°	77.4	1.9
0°-30°	501.3	12.6
0°-40°	804.1	20.2
0°-60°	1370.4	34.3
0°-90°	1707.1	42.8
90°-120°	486.0	12.2
90°-150°	1651.1	41.4
90°-180°	2284.0	57.2
0°-180°	3990.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	670	670	670	670	670	
5°	670	668	660	666	664	64
15°	638	634	626	628	625	180
25°	577	572	561	562	561	266
35°	498	492	481	477	474	311
45°	405	401	391	384	381	313
55°	307	303	295	287	284	274
65°	207	203	197	191	188	205
75°	108	107	104	100	101	116
85°	26	26	25	23	23	29
90°	1	9	24	23	23	4
95°	36	43	44	44	43	40
105°	148	150	152	153	153	156
115°	276	280	278	278	276	273
125°	401	407	405	403	402	358
135°	519	526	528	527	525	401
145°	630	635	639	640	637	394
155°	720	722	724	728	726	332
165°	784	783	783	788	784	221
175°	816	814	812	817	813	77
180°	817	817	817	817	817	

TEST NUMBER: P920633

CATALOG NUMBER: DFN2DIP-TR2F0-020D030US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	670.0	670.0	670.0	670.0	670.0
2.5°	673.9	670.7	663.6	670.0	668.8
5°	670.0	667.5	660.4	665.6	664.3
7.5°	665.6	661.7	654.6	659.8	658.5
10°	658.5	654.0	646.3	651.3	649.5
12.5°	648.8	645.0	637.2	640.4	639.1
15°	637.8	634.0	625.6	628.2	625.0
17.5°	624.3	620.5	612.1	615.3	612.1
20°	609.5	605.6	596.6	598.6	596.0
22.5°	594.7	588.9	580.5	580.5	579.2
25°	577.3	572.1	561.2	562.4	561.2
27.5°	557.9	553.4	545.1	543.2	539.9
30°	538.6	533.5	523.8	521.9	519.3
32.5°	518.0	514.2	503.9	500.0	497.4
35°	498.1	491.6	481.3	477.4	474.2
37.5°	475.5	469.7	459.3	454.9	451.6
40°	452.3	447.1	436.8	431.1	428.4
42.5°	429.7	424.6	414.3	407.9	404.0
45°	405.3	400.8	391.1	384.0	381.4
47.5°	381.4	376.9	366.6	359.5	355.7
50°	356.3	353.1	344.1	335.0	331.8
52.5°	331.8	327.3	318.9	311.9	307.4
55°	306.7	302.8	295.1	287.4	284.1
57.5°	281.5	278.4	269.9	262.3	259.6
60°	256.4	253.9	244.9	237.7	235.8
62.5°	232.0	227.4	221.0	214.6	212.0
65°	206.8	202.9	196.6	190.7	187.5
67.5°	181.1	177.8	172.0	167.6	165.0
70°	157.2	154.6	148.8	144.3	141.8
72.5°	132.8	130.2	126.9	122.4	120.5
75°	108.2	107.0	103.7	99.9	101.2
77.5°	86.4	83.8	82.4	80.5	78.6
80°	64.5	63.8	62.5	60.5	59.2
82.5°	43.8	43.8	43.2	40.6	40.6
85°	26.3	25.7	25.1	23.2	22.6
87.5°	11.6	10.3	9.0	7.1	6.5
90°	0.8	8.9	24.1	22.6	23.4
92.5°	15.2	20.7	21.4	22.1	22.1
95°	36.0	42.9	44.1	44.1	42.9
97.5°	59.8	66.2	69.0	69.0	69.0
100°	87.4	93.1	95.1	95.1	94.4
102.5°	116.5	120.7	123.4	124.2	123.4
105°	148.3	150.2	151.7	152.9	152.9
107.5°	179.8	182.7	182.7	183.2	179.8
110°	210.3	214.3	214.3	214.3	212.3

TEST NUMBER: P920633

CATALOG NUMBER: DFN2DIP-TR2F0-020D030US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	243.3	247.5	246.8	244.8	243.3
115°	275.9	279.7	278.5	277.8	275.9
117.5°	308.1	313.5	310.0	308.1	306.1
120°	340.6	346.0	340.6	340.6	338.4
122.5°	370.1	377.0	373.6	371.6	370.1
125°	401.2	407.3	405.4	403.1	402.4
127.5°	431.4	439.1	436.4	433.4	431.4
130°	459.8	468.6	467.4	466.0	463.2
132.5°	491.5	498.4	498.9	495.5	493.5
135°	518.9	526.5	528.0	527.3	525.3
137.5°	549.4	555.6	556.8	556.4	553.4
140°	576.3	582.5	585.9	585.9	583.2
142.5°	603.9	610.0	612.0	612.8	610.0
145°	630.0	634.9	638.9	639.5	636.9
147.5°	653.4	659.5	662.5	663.7	661.0
150°	677.5	681.7	684.4	686.6	684.4
152.5°	699.0	703.1	706.5	709.3	706.5
155°	720.4	722.3	724.5	728.0	725.8
157.5°	738.8	740.3	741.6	746.5	743.0
160°	755.4	756.8	757.6	761.7	758.8
162.5°	770.6	770.6	771.4	776.0	772.6
165°	783.7	782.9	782.9	787.8	784.4
167.5°	795.5	793.2	793.2	798.1	794.7
170°	804.3	802.4	801.7	806.6	802.4
172.5°	810.5	808.6	807.8	812.7	808.6
175°	815.5	813.5	812.0	816.9	812.7
177.5°	818.1	816.1	814.7	818.9	814.7
180°	816.9	816.9	816.9	816.9	816.9

TEST NUMBER: P920633

CATALOG NUMBER: DFN2DIP-TR2F0-020D030US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.83	8.63	8.85	9.66	11.03	7.41	8.21	8.43	9.23	10.61
	3H	9.46	10.18	10.49	11.21	12.61	9.00	9.72	10.03	10.75	12.15
	4H	10.03	10.71	11.07	11.75	13.15	9.57	10.25	10.61	11.29	12.69
	6H	10.41	11.04	11.46	12.08	13.49	9.95	10.58	11.00	11.62	13.03
	8H	10.50	11.10	11.56	12.16	13.56	10.05	10.64	11.10	11.70	13.11
	12H	10.54	11.11	11.60	12.16	13.59	10.08	10.65	11.14	11.70	13.13
4H	2H	8.28	8.96	9.32	9.99	11.39	7.94	8.62	8.98	9.65	11.05
	3H	10.11	10.68	11.16	11.74	13.15	9.73	10.29	10.78	11.36	12.77
	4H	10.80	11.32	11.86	12.38	13.81	10.41	10.93	11.47	11.98	13.42
	6H	11.29	11.74	12.36	12.82	14.25	10.90	11.34	11.96	12.42	13.85
	8H	11.43	11.85	12.50	12.92	14.36	11.03	11.45	12.10	12.52	13.96
	12H	11.49	11.87	12.58	12.95	14.40	11.08	11.46	12.17	12.55	13.99
8H	4H	10.98	11.40	12.05	12.47	13.92	10.63	11.05	11.70	12.12	13.57
	6H	11.58	11.93	12.68	13.04	14.48	11.23	11.58	12.33	12.69	14.13
	8H	11.79	12.09	12.89	13.19	14.65	11.43	11.73	12.53	12.83	14.29
	12H	11.90	12.17	13.01	13.26	14.76	11.53	11.80	12.64	12.89	14.39
12H	4H	10.96	11.34	12.05	12.43	13.88	10.62	11.00	11.71	12.08	13.53
	6H	11.61	11.91	12.71	13.01	14.47	11.27	11.57	12.37	12.67	14.13
	8H	11.83	12.10	12.93	13.19	14.69	11.48	11.75	12.59	12.84	14.34