

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923356

Luminaire Tested: DFN2DIP-TR2F0-020D020US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923356
REPORT IS A COMBINATION OF REPORTS P900221 AND P897145
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR2F0-020D020US940-FLLFLL
Description: 2 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3343.9 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.04' x L: 2.36' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 30.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923356

CATALOG NUMBER: DFN2DIP-TR2F0-020D020US940-FLLFLL

Luminous Intensity Polar Plot

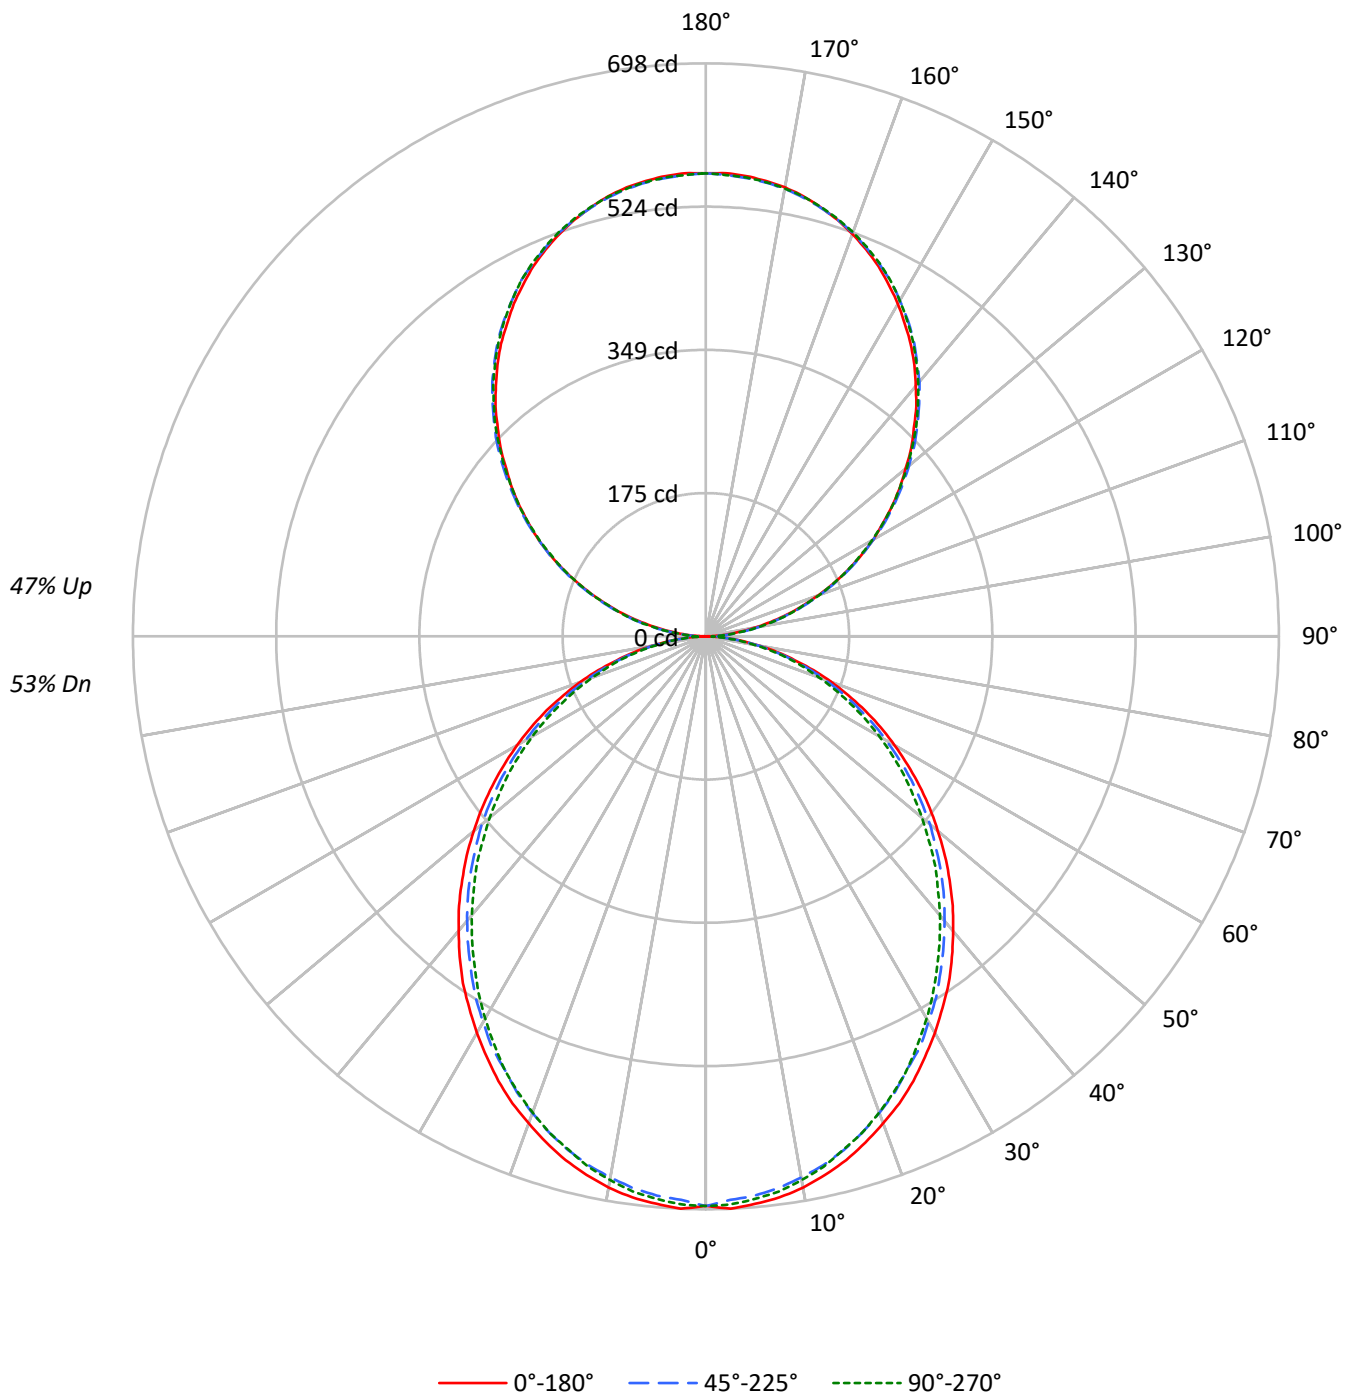

TEST NUMBER: P923356

CATALOG NUMBER: DFN2DIP-TR2F0-020D020US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1548	1548	1548
5°	1548	1523	1534
10°	1533	1499	1510
15°	1508	1471	1475
20°	1475	1433	1439
25°	1443	1389	1398
30°	1403	1347	1347
35°	1364	1299	1293
40°	1317	1250	1241
45°	1270	1200	1188
50°	1219	1148	1127
55°	1165	1088	1070
60°	1104	1018	1004
65°	1036	944	928
70°	951	854	844
75°	834	746	764
80°	692	608	616
85°	471	383	384

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1270 cd/sqm

TEST NUMBER: P923356

CATALOG NUMBER: DFN2DIP-TR2F0-020D020US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.3	2.0
10°-20°	183.8	5.5
20°-30°	270.1	8.1
30°-40°	313.7	9.4
40°-50°	313.3	9.4
50°-60°	273.2	8.2
60°-70°	201.9	6.0
70°-80°	114.2	3.4
80°-90°	31.8	1.0
90°-100°	34.9	1.0
100°-110°	110.9	3.3
110°-120°	189.8	5.7
120°-130°	249.6	7.5
130°-140°	280.2	8.4
140°-150°	274.7	8.2
150°-160°	230.4	6.9
160°-170°	152.8	4.6
170°-180°	53.4	1.6
0°-30°	519.1	15.5
0°-40°	832.8	24.9
0°-60°	1419.3	42.4
0°-90°	1767.2	52.8
90°-120°	335.6	10.0
90°-150°	1140.0	34.1
90°-180°	1577.0	47.2
0°-180°	3343.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	694	694	694	694	694	
5°	694	691	684	689	688	66
15°	661	657	648	651	647	186
25°	598	592	581	582	581	275
35°	516	509	498	494	491	322
45°	420	415	405	398	395	324
55°	318	314	306	298	294	284
65°	214	210	204	198	194	212
75°	112	111	107	103	105	120
85°	27	27	26	24	23	30
90°	0	6	17	16	16	3
95°	25	30	30	30	30	28
105°	102	104	105	106	106	108
115°	190	193	192	192	190	188
125°	277	281	280	278	278	248
135°	358	364	364	364	363	277
145°	435	438	441	442	440	272
155°	497	499	500	503	501	229
165°	541	541	541	544	542	153
175°	563	562	561	564	561	53
180°	564	564	564	564	564	

TEST NUMBER: P923356

CATALOG NUMBER: DFN2DIP-TR2F0-020D020US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	693.9	693.9	693.9	693.9	693.9
2.5°	697.9	694.6	687.2	693.9	692.7
5°	693.9	691.3	683.9	689.3	688.0
7.5°	689.3	685.3	678.0	683.3	682.0
10°	682.0	677.3	669.3	674.6	672.6
12.5°	671.9	668.0	660.0	663.3	661.9
15°	660.6	656.7	647.9	650.6	647.3
17.5°	646.6	642.7	633.9	637.2	633.9
20°	631.2	627.2	617.9	619.9	617.2
22.5°	615.9	609.9	601.2	601.2	599.9
25°	597.9	592.5	581.2	582.5	581.2
27.5°	577.8	573.2	564.5	562.6	559.2
30°	557.9	552.5	542.5	540.6	537.8
32.5°	536.5	532.5	521.8	517.8	515.1
35°	515.9	509.2	498.5	494.5	491.1
37.5°	492.5	486.4	475.7	471.1	467.7
40°	468.4	463.1	452.4	446.5	443.7
42.5°	445.1	439.7	429.1	422.4	418.4
45°	419.7	415.1	405.0	397.7	395.0
47.5°	395.0	390.4	379.7	372.3	368.4
50°	369.0	365.7	356.3	347.0	343.7
52.5°	343.7	338.9	330.3	323.0	318.3
55°	317.6	313.6	305.6	297.7	294.3
57.5°	291.6	288.3	279.6	271.6	268.9
60°	265.6	263.0	253.6	246.2	244.2
62.5°	240.2	235.5	228.9	222.2	219.5
65°	214.2	210.2	203.6	197.5	194.2
67.5°	187.5	184.1	178.2	173.5	170.9
70°	162.8	160.2	154.1	149.5	146.9
72.5°	137.5	134.8	131.4	126.8	124.8
75°	112.1	110.8	107.4	103.4	104.8
77.5°	89.4	86.8	85.3	83.4	81.4
80°	66.8	66.1	64.7	62.7	61.3
82.5°	45.4	45.4	44.8	42.1	42.1
85°	27.3	26.7	26.0	24.0	23.4
87.5°	12.0	10.7	9.4	7.4	6.7
90°	0.5	6.2	16.7	15.6	16.1
92.5°	10.5	14.3	14.8	15.3	15.3
95°	24.8	29.6	30.4	30.4	29.6
97.5°	41.3	45.7	47.6	47.6	47.6
100°	60.4	64.3	65.6	65.6	65.1
102.5°	80.4	83.3	85.2	85.7	85.2
105°	102.4	103.7	104.8	105.6	105.6
107.5°	124.1	126.2	126.2	126.5	124.1
110°	145.3	147.9	147.9	147.9	146.6

TEST NUMBER: P923356

CATALOG NUMBER: DFN2DIP-TR2F0-020D020US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	168.0	170.9	170.4	169.0	168.0
115°	190.5	193.1	192.3	191.8	190.5
117.5°	212.8	216.5	214.1	212.8	211.3
120°	235.1	238.9	235.1	235.1	233.6
122.5°	255.6	260.3	258.0	256.6	255.6
125°	277.0	281.2	279.9	278.4	277.9
127.5°	297.9	303.2	301.3	299.3	297.9
130°	317.4	323.6	322.7	321.7	319.9
132.5°	339.4	344.2	344.5	342.1	340.7
135°	358.3	363.6	364.5	364.1	362.7
137.5°	379.3	383.6	384.5	384.1	382.1
140°	397.9	402.2	404.6	404.6	402.7
142.5°	417.0	421.2	422.6	423.0	421.2
145°	435.0	438.4	441.1	441.6	439.7
147.5°	451.1	455.4	457.4	458.2	456.4
150°	467.8	470.6	472.5	474.0	472.5
152.5°	482.6	485.4	487.9	489.7	487.9
155°	497.4	498.7	500.2	502.7	501.1
157.5°	510.1	511.1	512.0	515.4	513.0
160°	521.6	522.5	523.1	525.9	523.9
162.5°	532.1	532.1	532.5	535.8	533.4
165°	541.1	540.6	540.6	543.9	541.6
167.5°	549.2	547.7	547.7	551.1	548.8
170°	555.4	554.0	553.5	556.9	554.0
172.5°	559.6	558.2	557.8	561.2	558.2
175°	563.0	561.7	560.6	564.0	561.2
177.5°	564.9	563.6	562.5	565.3	562.5
180°	564.0	564.0	564.0	564.0	564.0

TEST NUMBER: P923356

CATALOG NUMBER: DFN2DIP-TR2F0-020D020US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.92	9.81	9.85	10.76	11.99	8.50	9.38	9.43	10.33	11.56
	3H	10.56	11.35	11.50	12.31	13.57	10.10	10.89	11.04	11.85	13.11
	4H	11.13	11.88	12.09	12.85	14.11	10.67	11.43	11.63	12.39	13.65
	6H	11.51	12.21	12.48	13.18	14.45	11.05	11.75	12.02	12.72	13.99
	8H	11.61	12.27	12.59	13.26	14.53	11.15	11.81	12.13	12.80	14.07
	12H	11.65	12.28	12.63	13.26	14.56	11.19	11.82	12.17	12.80	14.09
4H	2H	9.38	10.13	10.34	11.09	12.35	9.04	9.79	10.00	10.75	12.02
	3H	11.22	11.84	12.19	12.84	14.11	10.83	11.46	11.81	12.45	13.73
	4H	11.91	12.49	12.90	13.47	14.77	11.52	12.09	12.50	13.08	14.38
	6H	12.41	12.90	13.40	13.91	15.21	12.01	12.51	13.01	13.52	14.81
	8H	12.55	13.01	13.54	14.01	15.33	12.15	12.61	13.14	13.61	14.93
	12H	12.61	13.03	13.63	14.05	15.37	12.20	12.62	13.22	13.64	14.96
8H	4H	12.10	12.56	13.10	13.57	14.88	11.75	12.21	12.75	13.22	14.53
	6H	12.71	13.09	13.73	14.13	15.45	12.35	12.74	13.37	13.78	15.09
	8H	12.91	13.25	13.94	14.28	15.61	12.55	12.89	13.58	13.92	15.25
	12H	13.03	13.33	14.06	14.35	15.73	12.66	12.96	13.69	13.98	15.36
12H	4H	12.09	12.50	13.10	13.52	14.84	11.74	12.16	12.76	13.18	14.50
	6H	12.73	13.07	13.76	14.10	15.43	12.39	12.73	13.42	13.76	15.09
	8H	12.96	13.25	13.99	14.28	15.65	12.61	12.91	13.64	13.93	15.31