

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904408

Luminaire Tested: DFN2DIP-TR3F0-040D080US830-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P904408  
REPORT IS A COMBINATION OF REPORTS P900344 AND P897195  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-TR3F0-040D080US830-RLLFLL  
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9877.8 lumens  
Efficiency: N/A  
Efficacy: 102.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 96.1  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9951  
Total Harmonic Distortion (THDi): 0.07  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P904408  
CATALOG NUMBER: DFN2DIP-TR3F0-040D080US830-RLLFLL

### Luminous Intensity Polar Plot

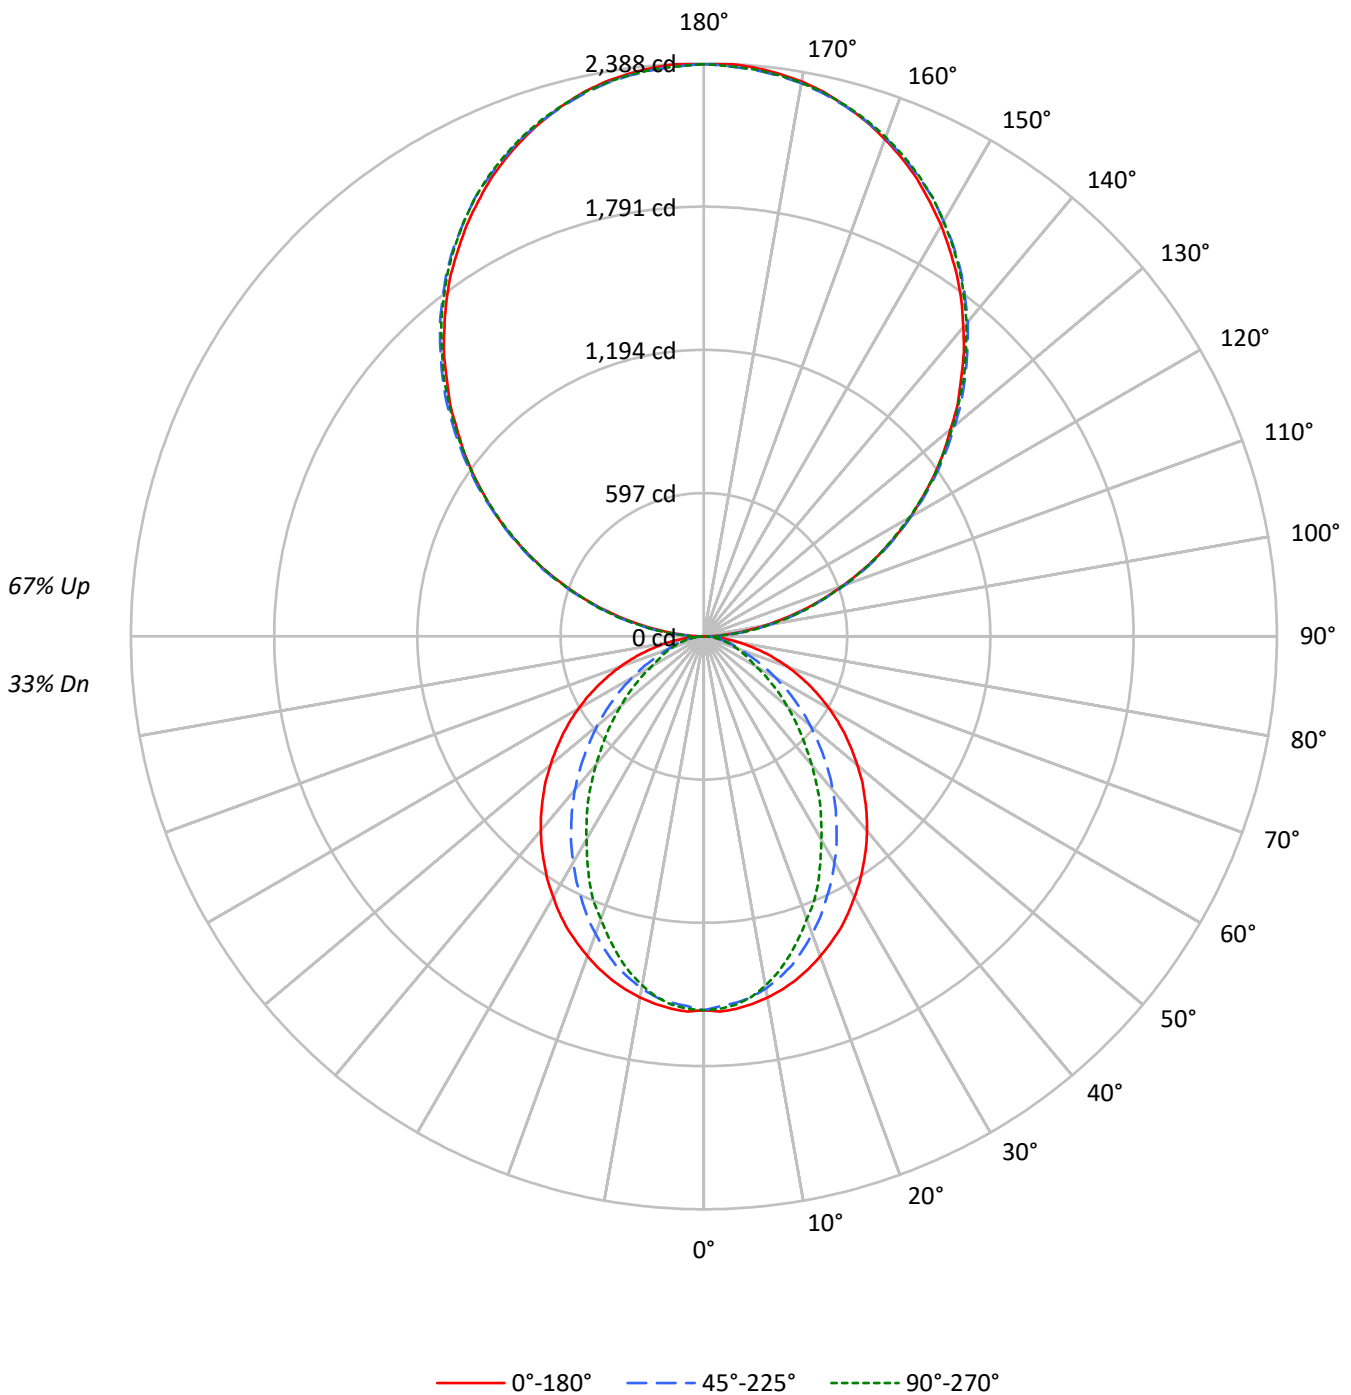



TEST NUMBER: P904408

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US830-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33				33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28				28
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29	24				24
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25	21				21
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22	18				18
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19	16				16
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17	14				14
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15	13				13
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14	11				11
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13	10				10
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11	9				9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1942	1942	1942
5°	1944	1909	1922
10°	1923	1870	1858
15°	1896	1807	1760
20°	1860	1720	1641
25°	1823	1623	1525
30°	1774	1524	1379
35°	1725	1417	1251
40°	1676	1307	1104
45°	1619	1185	971
50°	1559	1063	841
55°	1498	931	716
60°	1426	794	589
65°	1343	655	528
70°	1243	526	476
75°	1117	460	430
80°	934	381	369
85°	636	247	270

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2328 cd/sqm



TEST NUMBER: P904408

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US830-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.0	1.5
10°-20°	400.9	4.1
20°-30°	562.8	5.7
30°-40°	613.5	6.2
40°-50°	563.9	5.7
50°-60°	442.9	4.5
60°-70°	288.3	2.9
70°-80°	148.4	1.5
80°-90°	44.7	0.5
90°-100°	147.6	1.5
100°-110°	468.9	4.7
110°-120°	802.4	8.1
120°-130°	1055.3	10.7
130°-140°	1184.5	12.0
140°-150°	1161.5	11.8
150°-160°	974.4	9.9
160°-170°	646.2	6.5
170°-180°	225.9	2.3
0°-30°	1109.8	11.2
0°-40°	1723.3	17.4
0°-60°	2730.1	27.6
0°-90°	3211.4	32.5
90°-120°	1418.8	14.4
90°-150°	4820.1	48.8
90°-180°	6666.0	67.5
0°-180°	9877.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	2	26	70	66	68	10
95°	105	125	129	129	125	117
105°	433	439	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1534	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2286	2286	2300	2290	645
175°	2380	2375	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	



TEST NUMBER: P904408

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US830-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.6	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	614.0	625.5	625.5	625.5	619.7



TEST NUMBER: P904408

CATALOG NUMBER: DFN2DIP-TR3F0-040D080US830-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.6	720.4	714.6	710.3
115°	805.2	816.7	813.1	811.0	805.2
117.5°	899.4	915.2	905.1	899.4	893.6
120°	994.3	1010.1	994.3	994.3	987.8
122.5°	1080.5	1100.7	1090.6	1084.9	1080.5
125°	1171.1	1189.1	1183.4	1176.9	1174.8
127.5°	1259.6	1281.9	1273.9	1265.4	1259.6
130°	1342.3	1368.1	1364.5	1360.3	1352.4
132.5°	1435.0	1455.1	1456.6	1446.5	1440.8
135°	1514.8	1537.1	1541.4	1539.3	1533.5
137.5°	1603.9	1621.9	1625.5	1624.1	1615.4
140°	1682.3	1700.3	1710.3	1710.3	1702.4
142.5°	1762.8	1780.8	1786.6	1788.8	1780.8
145°	1839.1	1853.4	1864.9	1867.1	1859.2
147.5°	1907.3	1925.3	1933.9	1937.6	1929.7
150°	1977.8	1990.0	1997.9	2004.4	1997.9
152.5°	2040.3	2052.6	2062.7	2070.6	2062.7
155°	2102.9	2108.7	2115.2	2125.2	2118.7
157.5°	2156.8	2161.2	2164.7	2179.1	2169.1
160°	2205.0	2209.3	2211.5	2223.6	2215.1
162.5°	2249.6	2249.6	2251.7	2265.4	2255.3
165°	2287.6	2285.5	2285.5	2299.9	2289.8
167.5°	2322.1	2315.7	2315.7	2330.1	2320.0
170°	2348.1	2342.3	2340.1	2354.6	2342.3
172.5°	2366.1	2360.3	2358.1	2372.5	2360.3
175°	2380.4	2374.6	2370.3	2384.7	2372.5
177.5°	2388.3	2382.6	2378.2	2390.5	2378.2
180°	2384.7	2384.7	2384.7	2384.7	2384.7



TEST NUMBER: P904408  
 CATALOG NUMBER: DFN2DIP-TR3F0-040D080US830-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.50	8.21	8.60	9.30	10.80	3.48	4.18	4.57	5.27	6.78
	3H	9.16	9.79	10.27	10.89	12.41	4.65	5.28	5.76	6.38	7.90
	4H	9.75	10.35	10.87	11.46	12.98	5.09	5.69	6.21	6.79	8.32
	6H	10.16	10.71	11.29	11.82	13.35	5.40	5.95	6.53	7.05	8.59
	8H	10.28	10.80	11.41	11.92	13.45	5.48	6.01	6.61	7.13	8.66
	12H	10.33	10.83	11.47	11.95	13.50	5.52	6.02	6.65	7.13	8.68
4H	2H	7.50	8.10	8.63	9.20	10.73	4.05	4.65	5.18	5.75	7.28
	3H	9.31	9.81	10.44	10.93	12.47	5.38	5.88	6.51	7.01	8.55
	4H	9.99	10.45	11.12	11.56	13.12	5.92	6.38	7.05	7.50	9.05
	6H	10.49	10.88	11.63	12.02	13.57	6.33	6.72	7.47	7.86	9.41
	8H	10.65	11.02	11.79	12.15	13.72	6.45	6.81	7.59	7.95	9.51
	12H	10.74	11.07	11.90	12.21	13.78	6.51	6.84	7.66	7.98	9.55
8H	4H	9.95	10.31	11.09	11.44	13.01	6.19	6.55	7.33	7.68	9.25
	6H	10.50	10.80	11.66	11.97	13.54	6.69	6.99	7.85	8.17	9.73
	8H	10.71	10.97	11.87	12.12	13.71	6.88	7.14	8.04	8.29	9.88
	12H	10.83	11.06	12.00	12.22	13.83	6.99	7.22	8.16	8.37	9.99
12H	4H	9.89	10.22	11.05	11.37	12.94	6.18	6.51	7.34	7.66	9.23
	6H	10.47	10.73	11.64	11.89	13.47	6.74	7.00	7.90	8.16	9.74
	8H	10.68	10.91	11.85	12.06	13.68	6.94	7.17	8.11	8.32	9.94