

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907096

Luminaire Tested: DFN2DIP-TR3F0-030D050US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907096
REPORT IS A COMBINATION OF REPORTS P900299 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D050US835-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7395.0 lumens
Efficiency: N/A
Efficacy: 121.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 61.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907096

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US835-FLLFLL

Luminous Intensity Polar Plot

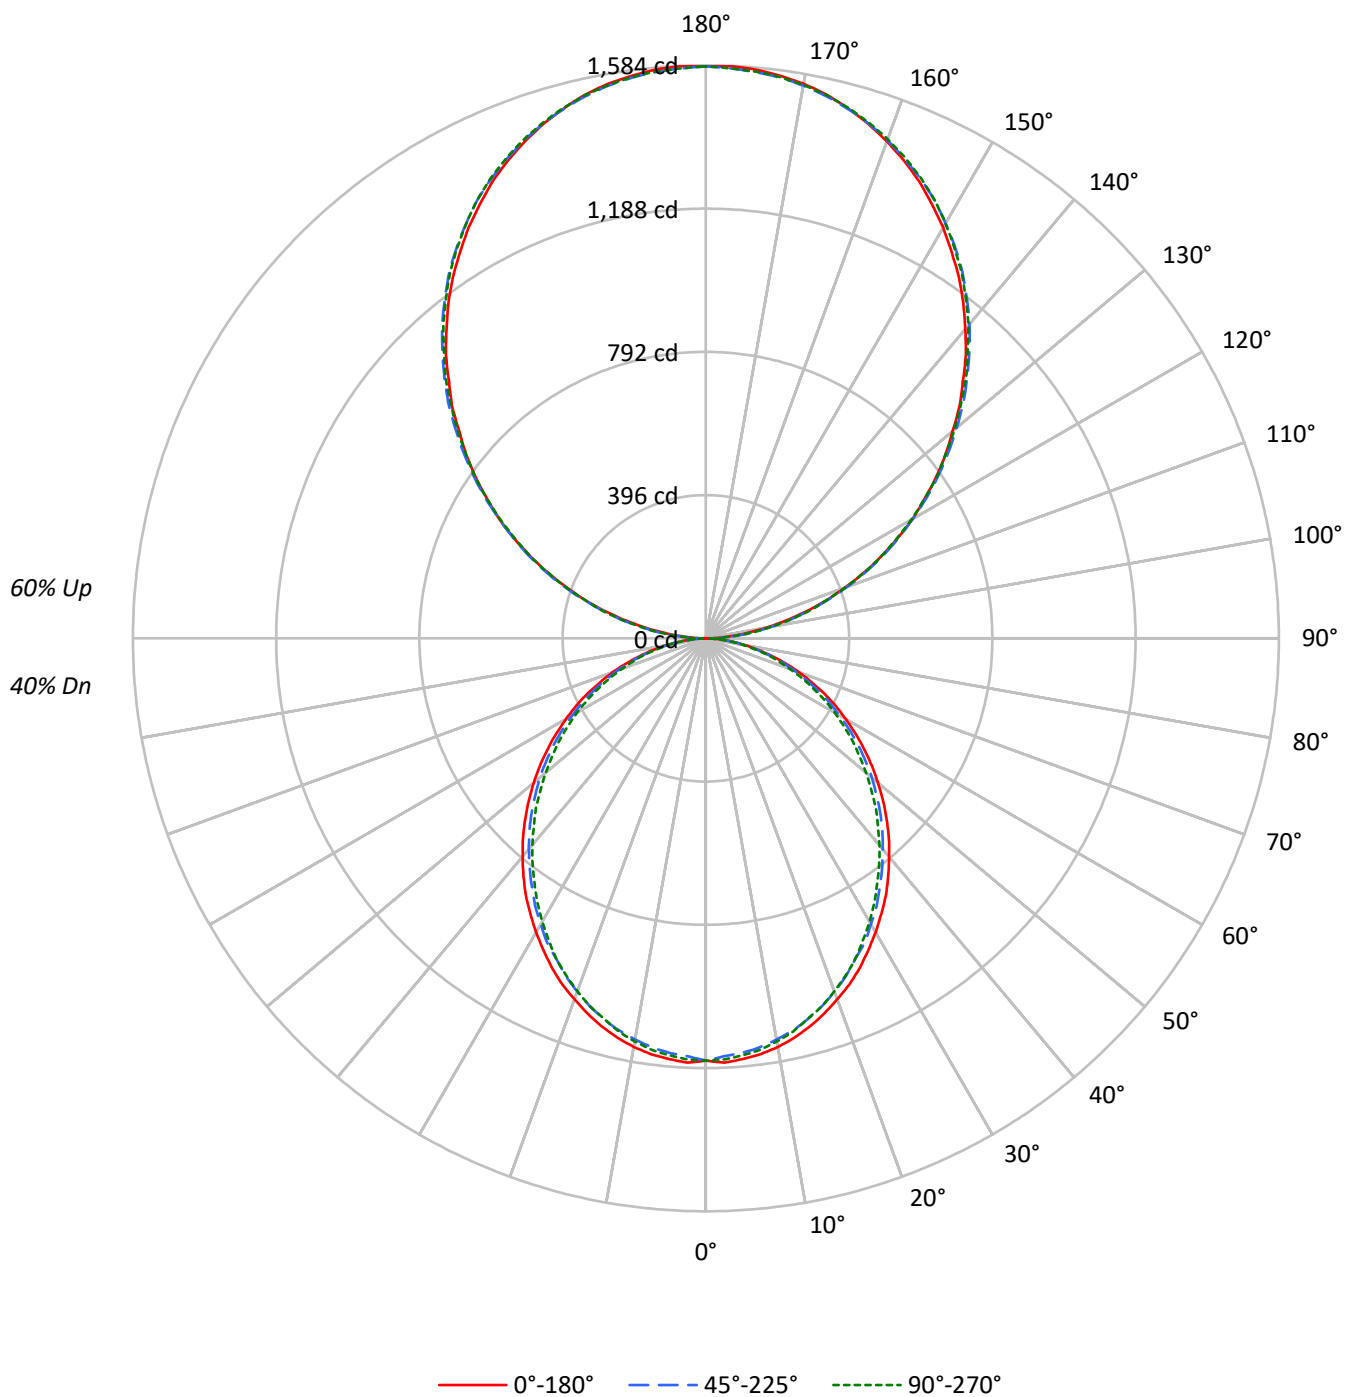

TEST NUMBER: P907096

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	42	41	40
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	29	27	25
5	67	55	47	41	60	51	44	38	42	37	33	34	30	27	26	23	21
6	61	49	41	36	56	45	38	33	38	32	28	30	27	24	24	21	19
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17
8	52	40	33	28	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	16	14
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1455	1455	1455
5°	1456	1433	1443
10°	1444	1413	1423
15°	1421	1388	1391
20°	1392	1355	1359
25°	1363	1315	1322
30°	1326	1278	1275
35°	1291	1234	1225
40°	1249	1190	1178
45°	1206	1145	1130
50°	1160	1099	1074
55°	1111	1045	1022
60°	1055	981	963
65°	995	915	893
70°	918	834	818
75°	812	737	747
80°	683	613	614
85°	483	404	396

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1544 cd/sqm

TEST NUMBER: P907096

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.9	1.5
10°-20°	309.1	4.2
20°-30°	454.3	6.1
30°-40°	527.6	7.1
40°-50°	527.0	7.1
50°-60°	459.5	6.2
60°-70°	339.7	4.6
70°-80°	192.2	2.6
80°-90°	55.2	0.7
90°-100°	97.8	1.3
100°-110°	310.9	4.2
110°-120°	532.1	7.2
120°-130°	699.7	9.5
130°-140°	785.4	10.6
140°-150°	770.2	10.4
150°-160°	646.1	8.7
160°-170°	428.5	5.8
170°-180°	149.8	2.0
0°-30°	873.3	11.8
0°-40°	1400.9	18.9
0°-60°	2387.4	32.3
0°-90°	2974.5	40.2
90°-120°	940.8	12.7
90°-150°	3196.2	43.2
90°-180°	4421.0	59.8
0°-180°	7395.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1167	1167	1167	1167	1167	
5°	1167	1163	1150	1160	1157	111
15°	1111	1105	1090	1094	1089	313
25°	1006	997	978	980	978	463
35°	868	856	838	832	826	542
45°	706	698	681	669	664	545
55°	534	528	514	501	495	478
65°	360	354	342	332	327	356
75°	188	186	181	174	176	201
85°	46	45	44	40	39	51
90°	1	17	47	44	45	7
95°	70	83	85	85	83	77
105°	287	291	294	296	296	303
115°	534	542	539	538	534	528
125°	777	788	785	780	779	694
135°	1004	1019	1022	1021	1017	776
145°	1220	1229	1237	1238	1233	762
155°	1394	1398	1402	1409	1405	642
165°	1517	1516	1516	1525	1518	428
175°	1578	1575	1572	1581	1573	150
180°	1581	1581	1581	1581	1581	

TEST NUMBER: P907096

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1167.3	1167.3	1167.3	1167.3	1167.3
2.5°	1174.1	1168.5	1156.1	1167.3	1165.2
5°	1167.3	1162.9	1150.5	1159.5	1157.3
7.5°	1159.5	1152.8	1140.4	1149.5	1147.2
10°	1147.2	1139.3	1125.9	1134.8	1131.5
12.5°	1130.3	1123.6	1110.2	1115.7	1113.5
15°	1111.2	1104.6	1089.9	1094.4	1088.8
17.5°	1087.6	1081.0	1066.3	1071.9	1066.3
20°	1061.8	1055.1	1039.4	1042.7	1038.3
22.5°	1036.1	1026.0	1011.3	1011.3	1009.0
25°	1005.7	996.8	977.7	979.9	977.7
27.5°	972.0	964.1	949.6	946.3	940.7
30°	938.4	929.4	912.6	909.2	904.7
32.5°	902.5	895.8	877.8	871.0	866.5
35°	867.7	856.5	838.5	831.7	826.1
37.5°	828.4	818.3	800.3	792.4	786.8
40°	788.0	779.0	761.0	751.0	746.5
42.5°	748.7	739.7	721.8	710.5	703.8
45°	706.1	698.2	681.3	669.0	664.5
47.5°	664.5	656.7	638.7	626.3	619.6
50°	620.7	615.1	599.4	583.7	578.1
52.5°	578.1	570.2	555.7	543.3	535.4
55°	534.4	527.6	514.1	500.7	495.1
57.5°	490.5	484.9	470.3	456.8	452.3
60°	446.7	442.3	426.6	414.2	410.9
62.5°	404.1	396.2	385.0	373.8	369.3
65°	360.4	353.6	342.4	332.3	326.7
67.5°	315.5	309.8	299.7	291.9	287.4
70°	273.9	269.4	259.3	251.4	247.0
72.5°	231.3	226.7	221.1	213.3	210.0
75°	188.5	186.4	180.7	174.0	176.3
77.5°	150.4	145.9	143.6	140.3	137.0
80°	112.3	111.1	108.8	105.5	103.3
82.5°	76.3	76.3	75.3	70.7	70.7
85°	46.0	44.9	43.8	40.4	39.3
87.5°	20.2	18.0	15.7	12.4	11.2
90°	1.4	17.2	46.7	43.9	45.3
92.5°	29.6	40.0	41.5	42.9	42.9
95°	69.6	83.0	85.3	85.3	83.0
97.5°	115.8	128.2	133.5	133.5	133.5
100°	169.2	180.2	184.0	184.0	182.6
102.5°	225.5	233.6	238.8	240.3	238.8
105°	287.0	290.8	293.7	296.0	296.0
107.5°	348.0	353.7	353.7	354.7	348.0
110°	407.1	414.8	414.8	414.8	410.9

TEST NUMBER: P907096

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	471.0	479.1	477.7	473.9	471.0
115°	533.9	541.6	539.2	537.8	533.9
117.5°	596.4	606.9	600.2	596.4	592.6
120°	659.3	669.8	659.3	659.3	655.0
122.5°	716.5	729.9	723.2	719.4	716.5
125°	776.6	788.5	784.7	780.4	779.0
127.5°	835.2	850.0	844.8	839.0	835.2
130°	890.1	907.2	904.8	902.0	896.7
132.5°	951.6	964.9	965.9	959.2	955.4
135°	1004.5	1019.2	1022.1	1020.7	1016.9
137.5°	1063.6	1075.5	1077.9	1076.9	1071.2
140°	1115.5	1127.5	1134.1	1134.1	1128.9
142.5°	1168.9	1180.9	1184.7	1186.1	1180.9
145°	1219.5	1229.0	1236.6	1238.1	1232.8
147.5°	1264.8	1276.7	1282.4	1284.8	1279.5
150°	1311.5	1319.6	1324.8	1329.1	1324.8
152.5°	1353.0	1361.1	1367.7	1373.0	1367.7
155°	1394.4	1398.2	1402.5	1409.2	1404.9
157.5°	1430.2	1433.0	1435.4	1445.0	1438.3
160°	1462.1	1465.0	1466.4	1474.5	1468.8
162.5°	1491.7	1491.7	1493.1	1502.2	1495.5
165°	1517.0	1515.5	1515.5	1525.1	1518.4
167.5°	1539.8	1535.5	1535.5	1545.1	1538.4
170°	1557.0	1553.2	1551.8	1561.3	1553.2
172.5°	1568.9	1565.1	1563.7	1573.2	1565.1
175°	1578.5	1574.6	1571.8	1581.3	1573.2
177.5°	1583.7	1579.9	1577.0	1585.1	1577.0
180°	1581.3	1581.3	1581.3	1581.3	1581.3

TEST NUMBER: P907096

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.54	8.32	8.58	9.37	10.77	7.11	7.89	8.15	8.94	10.34
	3H	9.19	9.89	10.23	10.94	12.36	8.72	9.42	9.77	10.47	11.89
	4H	9.77	10.43	10.82	11.48	12.91	9.30	9.96	10.36	11.01	12.44
	6H	10.15	10.76	11.22	11.82	13.26	9.68	10.30	10.75	11.35	12.80
	8H	10.25	10.83	11.32	11.91	13.34	9.78	10.37	10.86	11.44	12.88
	12H	10.29	10.85	11.37	11.91	13.38	9.82	10.37	10.90	11.44	12.90
4H	2H	7.99	8.65	9.06	9.71	11.14	7.65	8.31	8.71	9.37	10.80
	3H	9.84	10.39	10.91	11.47	12.92	9.45	10.00	10.52	11.08	12.53
	4H	10.54	11.05	11.62	12.12	13.59	10.14	10.65	11.22	11.72	13.19
	6H	11.04	11.48	12.13	12.58	14.03	10.64	11.08	11.73	12.17	13.63
	8H	11.19	11.59	12.27	12.68	14.16	10.78	11.19	11.87	12.28	13.75
	12H	11.25	11.62	12.36	12.72	14.20	10.84	11.21	11.94	12.31	13.79
8H	4H	10.73	11.14	11.82	12.22	13.70	10.37	10.78	11.46	11.87	13.34
	6H	11.35	11.68	12.45	12.81	14.28	10.99	11.32	12.10	12.45	13.92
	8H	11.56	11.85	12.68	12.97	14.46	11.20	11.49	12.31	12.60	14.09
	12H	11.68	11.94	12.80	13.05	14.58	11.30	11.56	12.42	12.67	14.20
12H	4H	10.71	11.08	11.81	12.18	13.66	10.36	10.73	11.47	11.83	13.31
	6H	11.37	11.67	12.49	12.78	14.27	11.03	11.32	12.14	12.43	13.92
	8H	11.60	11.86	12.72	12.97	14.50	11.25	11.51	12.37	12.62	14.15