

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907113

Luminaire Tested: DFN2DIP-TR3F0-030D090US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907113
REPORT IS A COMBINATION OF REPORTS P900356 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D090US835-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10515.0 lumens
Efficiency: N/A
Efficacy: 110.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 94.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907113

CATALOG NUMBER: DFN2DIP-TR3F0-030D090US835-RLLFLL

Luminous Intensity Polar Plot

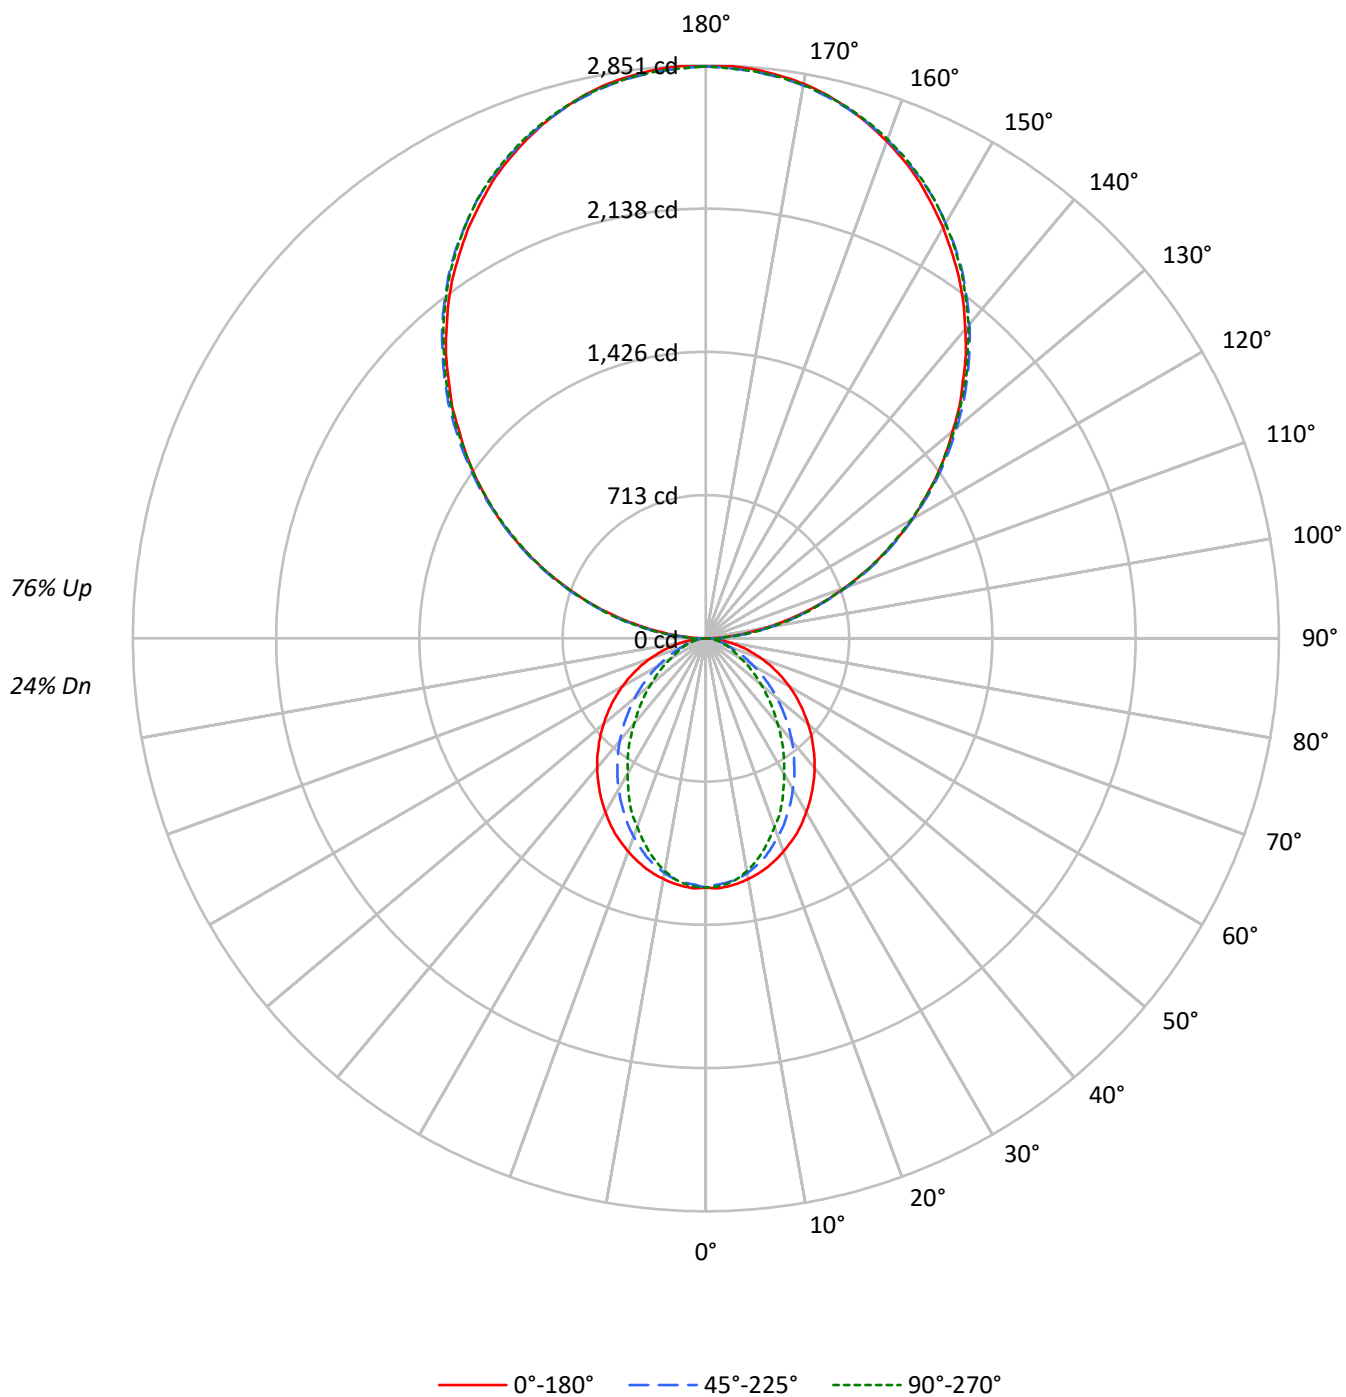

TEST NUMBER: P907113

CATALOG NUMBER: DFN2DIP-TR3F0-030D090US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33
1	92	88	85	81	82	79	76	73	61	59	57	44	43	42	29	28	28
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	26	25	24
3	77	68	61	56	68	61	55	50	47	43	40	35	32	30	23	22	20
4	70	60	53	47	62	54	48	43	42	38	34	31	28	26	21	19	18
5	64	54	46	40	57	48	42	37	38	33	29	28	25	22	19	17	16
6	59	48	40	35	53	43	37	32	34	29	26	25	22	20	17	15	14
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	12
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	14	12	11
9	47	36	29	24	42	32	26	22	25	21	18	19	16	14	13	11	10
10	44	33	26	21	39	29	23	19	23	19	16	18	15	13	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1545	1545	1545
5°	1547	1519	1529
10°	1530	1488	1478
15°	1509	1438	1401
20°	1480	1369	1305
25°	1450	1292	1213
30°	1411	1213	1097
35°	1373	1128	995
40°	1334	1040	878
45°	1288	943	773
50°	1241	845	669
55°	1192	741	570
60°	1135	632	468
65°	1069	522	420
70°	989	419	379
75°	889	366	342
80°	744	303	294
85°	506	196	215

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2778 cd/sqm

TEST NUMBER: P907113

CATALOG NUMBER: DFN2DIP-TR3F0-030D090US835-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.2	1.1
10°-20°	319.0	3.0
20°-30°	447.9	4.3
30°-40°	488.2	4.6
40°-50°	448.7	4.3
50°-60°	352.4	3.4
60°-70°	229.4	2.2
70°-80°	118.1	1.1
80°-90°	38.2	0.4
90°-100°	176.1	1.7
100°-110°	559.6	5.3
110°-120°	957.7	9.1
120°-130°	1259.5	12.0
130°-140°	1413.8	13.4
140°-150°	1386.4	13.2
150°-160°	1163.0	11.1
160°-170°	771.2	7.3
170°-180°	269.6	2.6
0°-30°	883.1	8.4
0°-40°	1371.3	13.0
0°-60°	2172.4	20.7
0°-90°	2558.1	24.3
90°-120°	1693.5	16.1
90°-150°	5753.1	54.7
90°-180°	7957.0	75.7
0°-180°	10515.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1240	1240	1240	1240	1240	
5°	1240	1234	1220	1230	1226	118
15°	1179	1167	1129	1108	1096	332
25°	1070	1034	960	914	898	492
35°	922	865	766	696	671	577
45°	754	679	561	481	454	582
55°	573	486	365	297	276	512
65°	387	296	195	157	154	384
75°	206	128	90	82	81	218
85°	48	25	21	21	21	55
90°	3	31	84	79	82	10
95°	125	149	154	154	149	139
105°	517	523	529	533	533	545
115°	961	975	970	968	961	951
125°	1398	1419	1412	1405	1402	1249
135°	1808	1835	1840	1837	1830	1398
145°	2195	2212	2226	2228	2219	1372
155°	2510	2517	2525	2537	2529	1155
165°	2730	2728	2728	2745	2733	770
175°	2841	2834	2829	2846	2832	270
180°	2846	2846	2846	2846	2846	

TEST NUMBER: P907113

CATALOG NUMBER: DFN2DIP-TR3F0-030D090US835-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1239.9	1239.9	1239.9	1239.9	1239.9
2.5°	1245.5	1239.9	1227.5	1238.8	1236.6
5°	1239.9	1234.3	1219.7	1229.8	1226.4
7.5°	1229.8	1223.1	1207.4	1211.8	1206.2
10°	1216.3	1208.5	1186.1	1182.6	1176.0
12.5°	1199.5	1189.4	1159.1	1152.4	1140.0
15°	1179.3	1166.9	1128.8	1107.5	1096.3
17.5°	1155.7	1137.8	1090.6	1066.0	1048.0
20°	1128.8	1106.3	1050.2	1022.3	997.5
22.5°	1099.7	1073.8	1008.7	970.6	953.8
25°	1070.5	1034.5	960.5	914.5	897.6
27.5°	1035.7	997.5	915.6	862.9	837.0
30°	998.7	956.0	866.2	809.1	778.7
32.5°	962.7	911.1	819.2	751.8	723.7
35°	922.4	865.1	766.4	695.7	671.0
37.5°	883.1	821.3	717.0	639.5	611.6
40°	841.6	774.3	665.4	585.7	556.6
42.5°	798.9	727.2	613.8	530.7	502.7
45°	754.1	678.8	561.1	481.3	454.4
47.5°	711.4	631.8	510.6	430.8	406.2
50°	664.3	584.6	461.2	383.7	360.2
52.5°	618.2	534.1	414.1	340.0	318.7
55°	573.3	485.8	364.6	297.4	276.1
57.5°	527.4	437.6	321.0	258.1	240.1
60°	480.2	390.5	274.9	217.7	199.8
62.5°	434.3	344.5	235.6	181.8	172.9
65°	387.1	296.2	195.2	157.1	153.7
67.5°	342.3	251.3	157.1	138.0	134.6
70°	295.1	207.6	130.1	118.9	114.4
72.5°	250.2	167.1	108.8	99.9	97.6
75°	206.4	127.9	89.8	81.9	80.8
77.5°	162.7	90.8	70.7	66.2	63.9
80°	122.3	65.1	53.8	49.4	49.4
82.5°	85.2	43.8	37.0	34.8	34.8
85°	48.2	24.6	21.3	21.3	21.3
87.5°	18.0	8.9	8.9	7.9	7.9
90°	2.6	30.9	84.1	78.9	81.5
92.5°	53.2	72.1	74.7	77.2	77.2
95°	125.3	149.3	153.6	153.6	149.3
97.5°	208.5	230.8	240.3	240.3	240.3
100°	304.6	324.4	331.2	331.2	328.7
102.5°	405.9	420.5	429.9	432.5	429.9
105°	516.6	523.4	528.6	532.9	532.9
107.5°	626.4	636.7	636.7	638.4	626.4
110°	732.8	746.6	746.6	746.6	739.7

TEST NUMBER: P907113

CATALOG NUMBER: DFN2DIP-TR3F0-030D090US835-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	847.8	862.4	859.8	853.0	847.8
115°	961.1	974.8	970.5	968.0	961.1
117.5°	1073.5	1092.4	1080.4	1073.5	1066.6
120°	1186.8	1205.6	1186.8	1186.8	1179.0
122.5°	1289.7	1313.8	1301.8	1294.9	1289.7
125°	1397.9	1419.3	1412.5	1404.7	1402.2
127.5°	1503.4	1530.0	1520.6	1510.3	1503.4
130°	1602.1	1633.0	1628.7	1623.5	1614.1
132.5°	1712.8	1736.8	1738.5	1726.5	1719.7
135°	1808.0	1834.6	1839.8	1837.2	1830.4
137.5°	1914.4	1935.9	1940.2	1938.5	1928.2
140°	2008.0	2029.4	2041.4	2041.4	2032.0
142.5°	2104.1	2125.5	2132.4	2135.0	2125.5
145°	2195.1	2212.2	2225.9	2228.5	2219.1
147.5°	2276.6	2298.0	2308.3	2312.6	2303.2
150°	2360.7	2375.3	2384.7	2392.4	2384.7
152.5°	2435.3	2449.9	2461.9	2471.4	2461.9
155°	2510.0	2516.8	2524.6	2536.6	2528.9
157.5°	2574.3	2579.5	2583.8	2600.9	2588.9
160°	2631.8	2637.0	2639.6	2654.1	2643.8
162.5°	2685.0	2685.0	2687.6	2703.9	2691.9
165°	2730.5	2727.9	2727.9	2745.1	2733.1
167.5°	2771.7	2764.0	2764.0	2781.1	2769.1
170°	2802.6	2795.7	2793.2	2810.3	2795.7
172.5°	2824.0	2817.2	2814.6	2831.8	2817.2
175°	2841.2	2834.3	2829.2	2846.4	2831.8
177.5°	2850.6	2843.8	2838.6	2853.2	2838.6
180°	2846.4	2846.4	2846.4	2846.4	2846.4

TEST NUMBER: P907113

CATALOG NUMBER: DFN2DIP-TR3F0-030D090US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.52	6.18	6.68	7.32	8.92	1.50	2.16	2.65	3.29	4.89
	3H	7.18	7.76	8.34	8.91	10.52	2.67	3.26	3.83	4.40	6.02
	4H	7.77	8.33	8.94	9.48	11.09	3.11	3.66	4.28	4.81	6.43
	6H	8.18	8.69	9.35	9.84	11.47	3.41	3.93	4.59	5.08	6.70
	8H	8.29	8.78	9.47	9.94	11.56	3.50	3.98	4.68	5.15	6.77
	12H	8.34	8.81	9.53	9.96	11.61	3.53	3.99	4.72	5.15	6.79
4H	2H	5.52	6.07	6.69	7.22	8.84	2.07	2.62	3.24	3.77	5.39
	3H	7.32	7.78	8.50	8.96	10.59	3.39	3.86	4.58	5.03	6.66
	4H	8.00	8.43	9.18	9.59	11.23	3.93	4.36	5.11	5.52	7.17
	6H	8.49	8.86	9.68	10.04	11.68	4.33	4.70	5.52	5.88	7.52
	8H	8.66	9.00	9.85	10.18	11.83	4.46	4.80	5.64	5.97	7.63
	12H	8.74	9.05	9.94	10.24	11.90	4.51	4.82	5.71	6.01	7.66
8H	4H	7.95	8.29	9.14	9.47	11.12	4.19	4.53	5.38	5.71	7.36
	6H	8.50	8.78	9.71	10.00	11.65	4.70	4.98	5.90	6.19	7.85
	8H	8.71	8.95	9.92	10.15	11.82	4.88	5.13	6.09	6.32	7.99
	12H	8.83	9.05	10.05	10.24	11.94	4.99	5.20	6.20	6.40	8.10
12H	4H	7.89	8.20	9.10	9.39	11.05	4.19	4.50	5.39	5.68	7.34
	6H	8.47	8.72	9.69	9.91	11.58	4.74	4.99	5.95	6.18	7.85
	8H	8.68	8.90	9.89	10.09	11.79	4.94	5.16	6.15	6.35	8.05

END OF REPORT