

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907125

Luminaire Tested: DFN2DIP-TR3F0-040D050US835-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907125
REPORT IS A COMBINATION OF REPORTS P901822 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-040D050US835-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8350.0 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 72.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907125
CATALOG NUMBER: DFN2DIP-TR3F0-040D050US835-RLLONL

Luminous Intensity Polar Plot

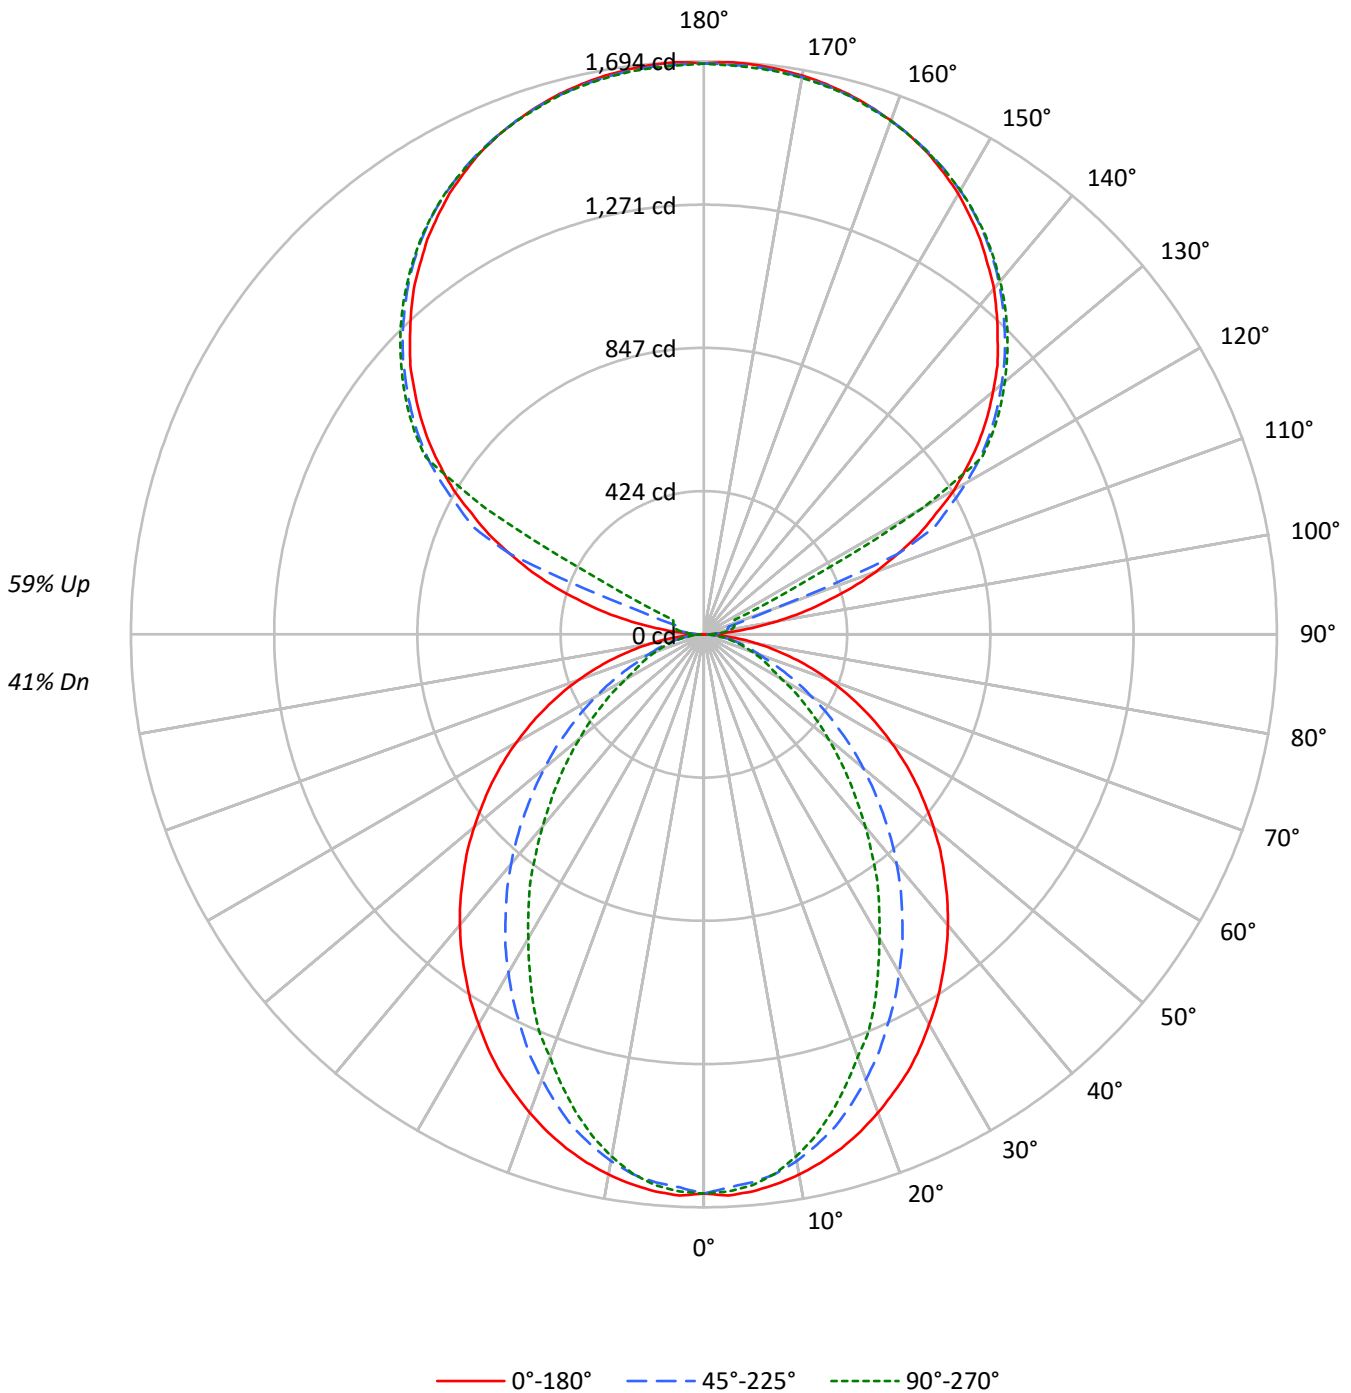



TEST NUMBER: P907125

CATALOG NUMBER: DFN2DIP-TR3F0-040D050US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	41	41	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35	35	35	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	30	30	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	26	26	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	23	23	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	21	21	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	19	19	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	17	17	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	15	15	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14	14	14	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2060	2060	2060
5°	2062	2026	2039
10°	2041	1984	1971
15°	2011	1917	1868
20°	1973	1825	1741
25°	1934	1722	1618
30°	1882	1617	1463
35°	1830	1504	1327
40°	1778	1387	1171
45°	1717	1258	1030
50°	1655	1127	892
55°	1589	988	760
60°	1513	843	624
65°	1425	696	560
70°	1319	558	505
75°	1185	488	457
80°	992	404	392
85°	675	262	286

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1717 cd/sqm



TEST NUMBER: P907125

CATALOG NUMBER: DFN2DIP-TR3F0-040D050US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.9	1.9
10°-20°	425.3	5.1
20°-30°	597.2	7.2
30°-40°	650.9	7.8
40°-50°	598.3	7.2
50°-60°	469.9	5.6
60°-70°	305.8	3.7
70°-80°	157.4	1.9
80°-90°	43.2	0.5
90°-100°	55.7	0.7
100°-110°	207.4	2.5
110°-120°	550.1	6.6
120°-130°	912.4	10.9
130°-140°	969.2	11.6
140°-150°	900.8	10.8
150°-160°	724.2	8.7
160°-170°	466.6	5.6
170°-180°	160.6	1.9
0°-30°	1177.4	14.1
0°-40°	1828.4	21.9
0°-60°	2896.5	34.7
0°-90°	3403.0	40.8
90°-120°	813.2	9.7
90°-150°	3595.6	43.1
90°-180°	4947.0	59.2
0°-180°	8350.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	1	15	24	31	33	8
95°	79	39	48	54	52	94
105°	371	408	74	88	93	397
115°	702	723	753	188	100	691
125°	993	1009	1032	1040	1044	885
135°	1228	1248	1259	1271	1269	949
145°	1425	1424	1444	1453	1447	891
155°	1569	1558	1573	1580	1570	723
165°	1653	1646	1650	1658	1650	467
175°	1691	1682	1685	1694	1681	161
180°	1687	1687	1687	1687	1687	



TEST NUMBER: P907125

CATALOG NUMBER: DFN2DIP-TR3F0-040D050US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	1.2	14.6	24.4	30.6	32.9
92.5°	30.6	25.7	29.3	31.8	32.9
95°	79.3	39.0	47.6	53.8	52.5
97.5°	142.8	42.8	62.2	66.0	67.1
100°	216.2	48.9	69.6	79.3	81.8
102.5°	296.7	294.3	72.1	85.4	89.2
105°	371.2	407.9	74.5	87.9	92.8
107.5°	457.9	488.3	77.0	90.3	95.3
110°	541.0	566.5	213.7	91.6	96.4



TEST NUMBER: P907125

CATALOG NUMBER: DFN2DIP-TR3F0-040D050US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	619.1	641.0	620.3	94.0	97.7
115°	702.1	722.8	753.4	188.1	100.2
117.5°	774.1	798.5	819.4	644.6	324.8
120°	854.7	873.0	895.0	909.7	744.8
122.5°	923.0	942.6	967.1	974.4	975.7
125°	992.6	1008.6	1031.8	1040.3	1044.0
127.5°	1056.1	1073.2	1091.7	1103.8	1105.0
130°	1116.0	1135.6	1148.9	1162.4	1161.3
132.5°	1177.1	1193.0	1206.3	1217.4	1216.2
135°	1228.4	1248.0	1258.8	1271.2	1268.7
137.5°	1282.0	1296.7	1309.0	1321.2	1317.6
140°	1334.5	1344.4	1357.7	1368.7	1362.7
142.5°	1378.6	1387.2	1403.0	1412.7	1406.6
145°	1425.0	1423.7	1444.4	1453.0	1446.9
147.5°	1465.2	1461.5	1482.3	1488.4	1483.6
150°	1504.3	1495.8	1515.3	1522.6	1516.5
152.5°	1537.2	1527.5	1545.8	1553.2	1544.6
155°	1569.0	1558.1	1572.7	1580.0	1570.3
157.5°	1594.6	1584.9	1595.9	1604.5	1594.6
160°	1616.7	1609.3	1616.7	1623.9	1615.4
162.5°	1636.1	1628.9	1634.9	1643.5	1632.5
165°	1653.2	1646.0	1649.6	1658.1	1649.6
167.5°	1666.7	1659.3	1663.1	1671.6	1660.6
170°	1677.7	1670.3	1672.8	1681.3	1670.3
172.5°	1685.0	1677.7	1680.2	1688.7	1677.7
175°	1691.1	1682.5	1685.0	1693.5	1681.3
177.5°	1693.5	1685.0	1686.3	1694.8	1683.8
180°	1687.4	1687.4	1687.4	1687.4	1687.4



TEST NUMBER: P907125
 CATALOG NUMBER: DFN2DIP-TR3F0-040D050US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.68	9.44	9.72	10.48	11.88	4.65	5.41	5.69	6.45	7.85
	3H	10.34	11.02	11.39	12.07	13.49	5.83	6.51	6.88	7.56	8.98
	4H	10.94	11.58	12.00	12.63	14.06	6.28	6.92	7.34	7.97	9.40
	6H	11.35	11.94	12.42	13.00	14.44	6.59	7.18	7.66	8.24	9.67
	8H	11.47	12.03	12.54	13.10	14.54	6.67	7.24	7.75	8.31	9.74
	12H	11.53	12.06	12.60	13.13	14.58	6.71	7.25	7.79	8.31	9.77
4H	2H	8.69	9.33	9.75	10.38	11.81	5.24	5.88	6.30	6.93	8.36
	3H	10.50	11.03	11.57	12.11	13.55	6.57	7.11	7.65	8.19	9.63
	4H	11.18	11.67	12.26	12.74	14.20	7.11	7.60	8.19	8.67	10.13
	6H	11.68	12.10	12.77	13.20	14.65	7.52	7.94	8.61	9.04	10.49
	8H	11.85	12.24	12.94	13.33	14.80	7.65	8.04	8.74	9.12	10.60
	12H	11.94	12.29	13.04	13.39	14.87	7.71	8.06	8.81	9.16	10.63
8H	4H	11.14	11.53	12.23	12.62	14.09	7.38	7.78	8.47	8.86	10.33
	6H	11.69	12.02	12.81	13.15	14.61	7.89	8.21	9.00	9.34	10.81
	8H	11.91	12.19	13.02	13.30	14.79	8.08	8.36	9.19	9.47	10.96
	12H	12.03	12.28	13.15	13.39	14.91	8.19	8.44	9.31	9.54	11.07
12H	4H	11.09	11.44	12.20	12.54	14.02	7.38	7.74	8.49	8.84	10.31
	6H	11.67	11.95	12.79	13.06	14.55	7.94	8.22	9.05	9.33	10.82
	8H	11.88	12.13	13.00	13.24	14.76	8.14	8.39	9.26	9.49	11.02