

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907213

Luminaire Tested: DFN2DIP-TR3F0-070D080US835-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907213
REPORT IS A COMBINATION OF REPORTS P901869 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D080US835-FLLONL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14850.0 lumens
Efficiency: N/A
Efficacy: 113.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 131.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907213

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US835-FLLONL

Luminous Intensity Polar Plot

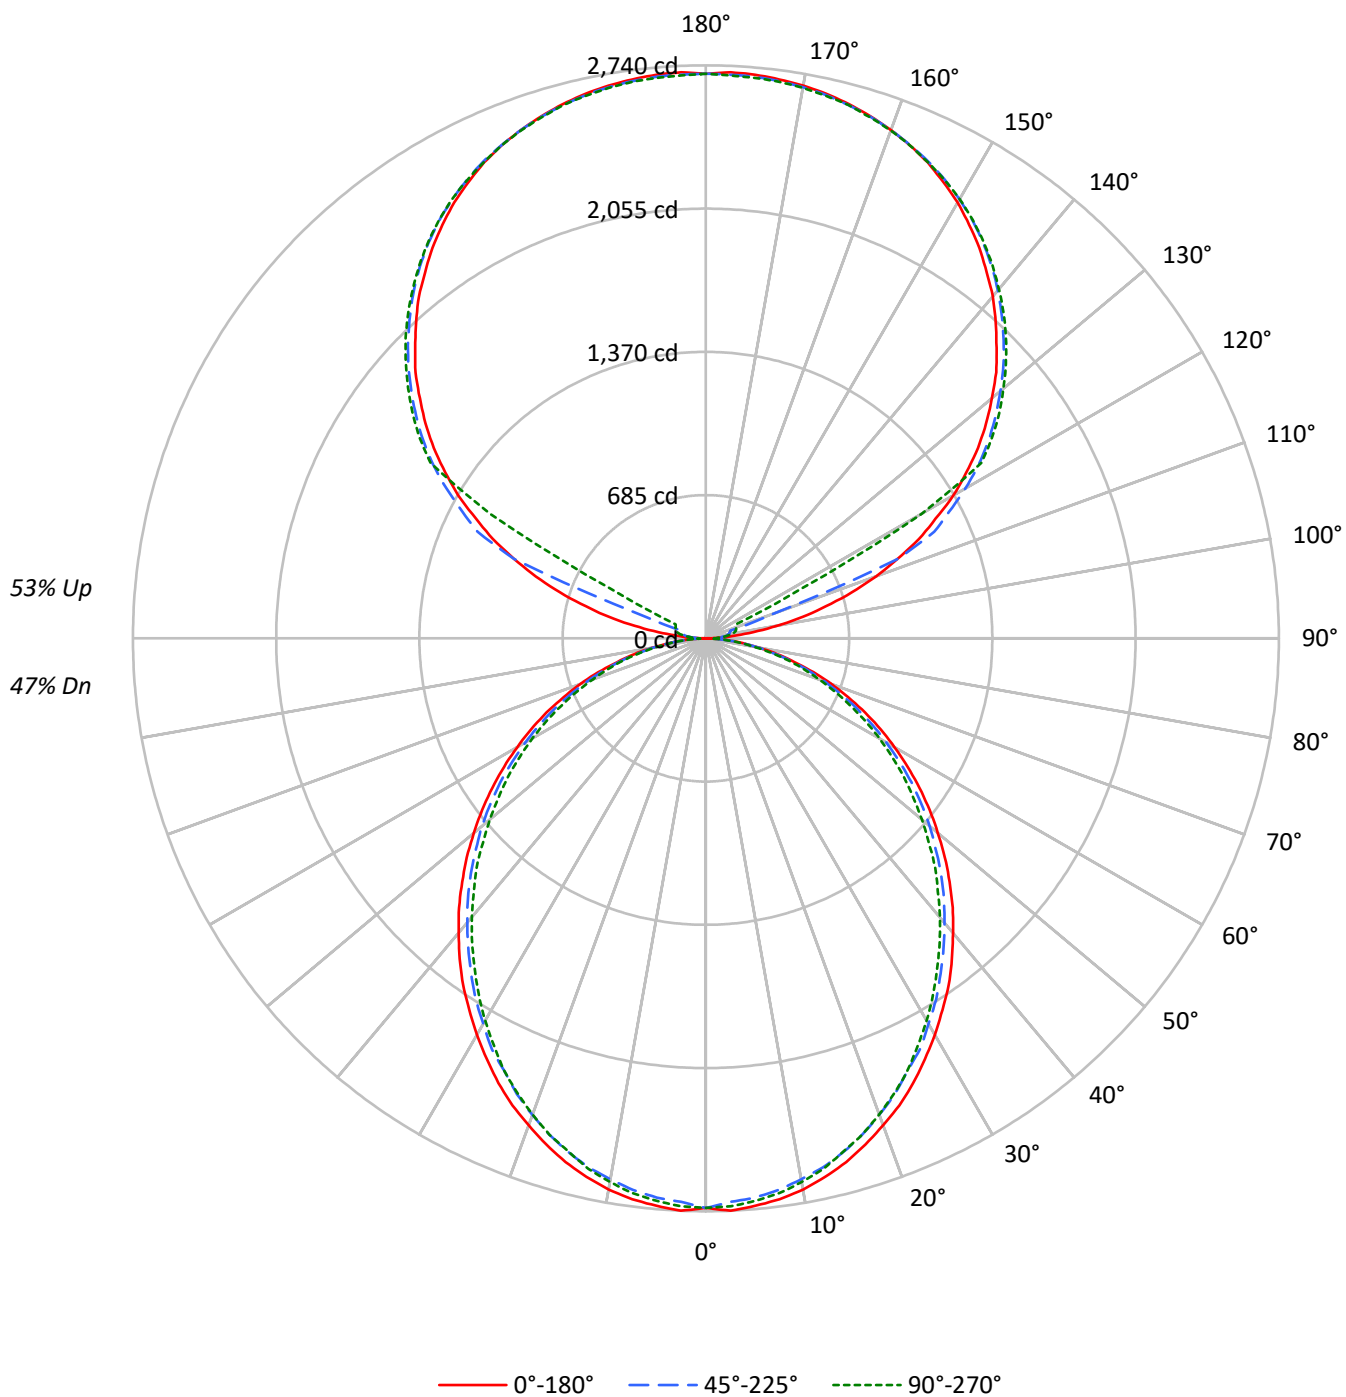

TEST NUMBER: P907213

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US835-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53
1	97	93	89	85	89	85	82	79	71	69	67	59	57	56	47	46	45
2	88	81	75	70	81	75	69	65	63	59	55	52	49	46	41	39	38
3	81	71	64	58	74	66	59	54	55	50	47	46	42	39	37	34	32
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	27	24
6	62	50	42	36	57	47	39	34	40	34	30	33	29	25	27	24	21
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	24	21	19
8	53	41	33	28	49	38	31	27	33	27	23	27	23	20	22	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3394	3394	3394
5°	3398	3344	3367
10°	3368	3296	3319
15°	3317	3239	3246
20°	3248	3161	3171
25°	3180	3068	3084
30°	3094	2981	2975
35°	3013	2879	2859
40°	2914	2776	2749
45°	2814	2673	2636
50°	2706	2564	2506
55°	2592	2438	2385
60°	2463	2289	2247
65°	2322	2135	2084
70°	2142	1946	1908
75°	1894	1720	1742
80°	1594	1431	1432
85°	1126	943	925

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2814 cd/sqm

TEST NUMBER: P907213

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.4	1.7
10°-20°	721.3	4.9
20°-30°	1060.0	7.1
30°-40°	1231.1	8.3
40°-50°	1229.6	8.3
50°-60°	1072.2	7.2
60°-70°	792.6	5.3
70°-80°	448.4	3.0
80°-90°	123.1	0.8
90°-100°	89.0	0.6
100°-110°	331.9	2.2
110°-120°	880.2	5.9
120°-130°	1459.9	9.8
130°-140°	1550.7	10.4
140°-150°	1441.2	9.7
150°-160°	1158.7	7.8
160°-170°	746.6	5.0
170°-180°	257.0	1.7
0°-30°	2037.7	13.7
0°-40°	3268.8	22.0
0°-60°	5570.6	37.5
0°-90°	6934.8	46.7
90°-120°	1301.1	8.8
90°-150°	5752.9	38.7
90°-180°	7915.0	53.3
0°-180°	14850.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2724	2724	2724	2724	2724	
5°	2724	2714	2685	2705	2700	259
15°	2593	2577	2543	2554	2541	730
25°	2347	2326	2281	2286	2281	1080
35°	2025	1998	1956	1941	1928	1264
45°	1648	1629	1590	1561	1550	1271
55°	1247	1231	1200	1168	1155	1115
65°	841	825	799	775	762	831
75°	440	435	422	406	411	470
85°	107	105	102	94	92	120
90°	2	23	39	49	53	14
95°	127	62	76	86	84	150
105°	594	653	119	141	148	635
115°	1123	1156	1205	301	160	1106
125°	1588	1614	1651	1664	1670	1416
135°	1965	1997	2014	2034	2030	1518
145°	2280	2278	2311	2325	2315	1426
155°	2510	2493	2516	2528	2512	1157
165°	2645	2634	2639	2653	2639	747
175°	2706	2692	2696	2710	2690	258
180°	2700	2700	2700	2700	2700	

TEST NUMBER: P907213

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2723.7	2723.7	2723.7	2723.7	2723.7
2.5°	2739.6	2726.5	2697.6	2723.7	2718.7
5°	2723.7	2713.5	2684.6	2705.4	2700.4
7.5°	2705.4	2689.8	2660.9	2682.1	2676.8
10°	2676.8	2658.4	2627.0	2647.9	2640.1
12.5°	2637.3	2621.8	2590.4	2603.4	2598.1
15°	2592.9	2577.3	2543.1	2553.7	2540.6
17.5°	2537.8	2522.3	2488.1	2501.2	2488.1
20°	2477.5	2462.0	2425.3	2433.1	2422.8
22.5°	2417.5	2393.9	2359.7	2359.7	2354.4
25°	2346.7	2325.8	2281.4	2286.4	2281.4
27.5°	2268.0	2249.7	2215.8	2208.0	2194.9
30°	2189.7	2168.5	2129.4	2121.6	2111.0
32.5°	2105.7	2090.2	2048.2	2032.4	2021.8
35°	2024.6	1998.5	1956.5	1940.7	1927.6
37.5°	1932.9	1909.3	1867.3	1849.0	1835.9
40°	1838.7	1817.6	1775.6	1752.3	1741.7
42.5°	1747.0	1725.9	1684.2	1657.8	1642.2
45°	1647.5	1629.2	1589.7	1561.1	1550.5
47.5°	1550.5	1532.2	1490.2	1461.3	1445.8
50°	1448.3	1435.2	1398.5	1361.9	1348.8
52.5°	1348.8	1330.5	1296.6	1267.7	1249.3
55°	1246.8	1231.0	1199.6	1168.2	1155.1
57.5°	1144.6	1131.5	1097.3	1065.9	1055.4
60°	1042.3	1032.0	995.4	966.5	958.7
62.5°	942.8	924.5	898.4	872.3	861.7
65°	840.9	825.0	798.9	775.3	762.2
67.5°	736.1	722.8	699.4	681.1	670.5
70°	639.1	628.6	604.9	586.6	576.3
72.5°	539.6	529.1	516.0	497.7	489.9
75°	439.9	434.9	421.5	406.0	411.3
77.5°	351.0	340.4	335.1	327.3	319.6
80°	262.0	259.3	254.0	246.2	240.9
82.5°	178.1	178.1	175.6	165.1	165.1
85°	107.3	104.8	102.3	94.2	91.7
87.5°	47.2	42.0	36.7	28.9	26.1
90°	1.9	23.4	39.0	48.9	52.7
92.5°	48.9	41.1	46.9	50.8	52.7
95°	126.9	62.4	76.1	86.1	84.0
97.5°	228.5	68.4	99.5	105.6	107.4
100°	345.9	78.2	111.4	126.9	130.8
102.5°	474.7	470.9	115.3	136.6	142.7
105°	593.9	652.6	119.2	140.6	148.5
107.5°	732.6	781.3	123.2	144.5	152.4
110°	865.6	906.4	342.0	146.6	154.3



TEST NUMBER: P907213

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	990.6	1025.6	992.5	150.3	156.4
115°	1123.3	1156.5	1205.4	300.9	160.3
117.5°	1238.6	1277.6	1311.0	1031.4	519.7
120°	1367.6	1396.8	1432.1	1455.5	1191.7
122.5°	1476.8	1508.2	1547.4	1559.0	1561.1
125°	1588.2	1613.7	1650.8	1664.5	1670.3
127.5°	1689.8	1717.2	1746.7	1766.1	1768.0
130°	1785.6	1816.9	1838.3	1859.9	1858.0
132.5°	1883.3	1908.8	1930.2	1947.8	1945.9
135°	1965.4	1996.7	2014.1	2033.9	2029.9
137.5°	2051.3	2074.7	2094.4	2113.9	2108.1
140°	2135.2	2151.0	2172.4	2190.0	2180.2
142.5°	2205.8	2219.4	2244.7	2260.3	2250.5
145°	2280.0	2277.9	2311.1	2324.8	2315.0
147.5°	2344.3	2338.5	2371.6	2381.4	2373.7
150°	2406.9	2393.2	2424.5	2436.1	2426.4
152.5°	2459.6	2444.0	2473.2	2485.1	2471.4
155°	2510.4	2493.0	2516.4	2528.0	2512.5
157.5°	2551.4	2535.9	2553.5	2567.2	2551.4
160°	2586.7	2574.9	2586.7	2598.3	2584.6
162.5°	2617.8	2606.2	2615.9	2629.6	2612.0
165°	2645.2	2633.6	2639.4	2653.0	2639.4
167.5°	2666.7	2654.9	2660.9	2674.6	2657.0
170°	2684.4	2672.5	2676.5	2690.2	2672.5
172.5°	2696.0	2684.4	2688.3	2702.0	2684.4
175°	2705.7	2692.0	2696.0	2709.6	2690.2
177.5°	2709.6	2696.0	2698.0	2711.7	2694.1
180°	2699.9	2699.9	2699.9	2699.9	2699.9

TEST NUMBER: P907213

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.15	11.98	12.14	12.98	14.30	10.72	11.56	11.71	12.55	13.87
	3H	12.80	13.55	13.80	14.55	15.89	12.33	13.08	13.33	14.09	15.42
	4H	13.38	14.09	14.39	15.10	16.45	12.91	13.62	13.92	14.63	15.98
	6H	13.77	14.42	14.79	15.44	16.80	13.30	13.95	14.32	14.97	16.33
	8H	13.87	14.49	14.90	15.52	16.88	13.40	14.02	14.43	15.06	16.41
	12H	13.92	14.51	14.95	15.53	16.91	13.44	14.03	14.47	15.06	16.44
4H	2H	11.61	12.31	12.62	13.32	14.67	11.26	11.97	12.28	12.98	14.33
	3H	13.46	14.05	14.48	15.09	16.45	13.07	13.66	14.09	14.70	16.06
	4H	14.17	14.71	15.20	15.74	17.12	13.76	14.30	14.80	15.34	16.72
	6H	14.67	15.14	15.71	16.19	17.57	14.27	14.73	15.31	15.78	17.16
	8H	14.81	15.25	15.86	16.30	17.69	14.41	14.84	15.45	15.89	17.28
	12H	14.88	15.27	15.94	16.34	17.74	14.47	14.86	15.53	15.92	17.32
8H	4H	14.36	14.79	15.40	15.84	17.23	14.00	14.43	15.04	15.48	16.87
	6H	14.98	15.33	16.04	16.42	17.81	14.62	14.98	15.68	16.06	17.46
	8H	15.19	15.50	16.26	16.58	17.99	14.83	15.14	15.90	16.21	17.62
	12H	15.31	15.59	16.39	16.66	18.11	14.93	15.21	16.01	16.28	17.73
12H	4H	14.34	14.73	15.40	15.79	17.19	13.99	14.38	15.05	15.44	16.84
	6H	15.00	15.32	16.08	16.39	17.80	14.66	14.97	15.73	16.04	17.45
	8H	15.24	15.51	16.31	16.58	18.03	14.88	15.16	15.96	16.23	17.68