

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909870

Luminaire Tested: DFN2DIP-TR3F0-050D030US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909870
REPORT IS A COMBINATION OF REPORTS P900276 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-050D030US840-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6973.2 lumens
Efficiency: N/A
Efficacy: 102.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 68.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909870

CATALOG NUMBER: DFN2DIP-TR3F0-050D030US840-RLLFLL

Luminous Intensity Polar Plot

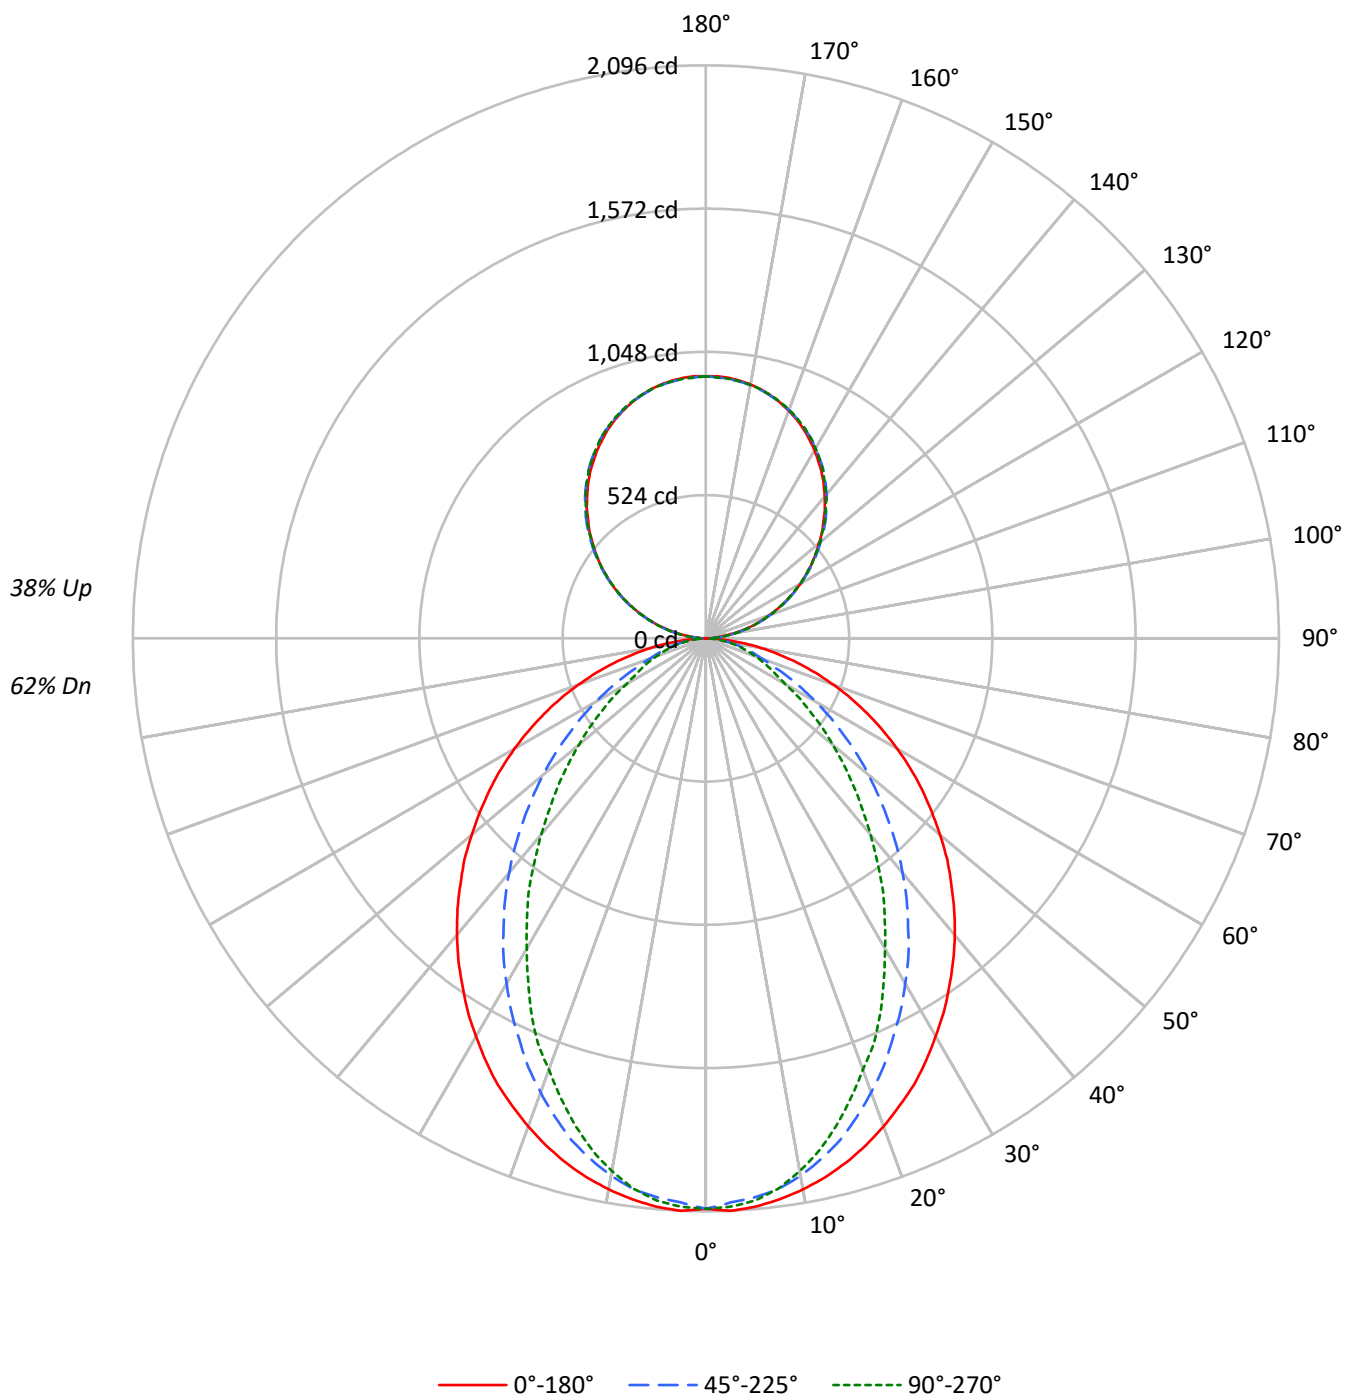

TEST NUMBER: P909870

CATALOG NUMBER: DFN2DIP-TR3F0-050D030US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67
1	101	97	93	90	94	91	88	85	80	77	75	69	68	66	60	59	58
2	92	85	79	74	86	80	75	70	71	67	63	62	59	56	53	51	49
3	85	75	68	63	79	71	65	60	63	58	54	55	51	48	48	45	43
4	78	67	60	54	73	63	57	51	56	51	46	49	45	42	43	40	37
5	72	60	52	46	67	57	50	44	51	45	41	45	40	37	39	36	33
6	66	54	46	41	62	51	44	39	46	40	36	41	36	32	36	32	29
7	62	49	42	36	58	47	40	35	42	36	32	37	33	29	33	29	26
8	57	45	37	32	54	43	36	31	38	33	28	34	30	26	30	27	24
9	53	41	34	29	50	39	32	28	35	30	26	32	27	24	28	24	22
10	50	38	31	26	47	36	30	25	33	27	23	29	25	22	26	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2600	2600	2600
5°	2603	2557	2574
10°	2576	2505	2488
15°	2539	2420	2357
20°	2491	2304	2197
25°	2441	2174	2042
30°	2375	2041	1847
35°	2310	1898	1675
40°	2244	1751	1479
45°	2168	1588	1300
50°	2089	1423	1126
55°	2006	1247	959
60°	1910	1064	788
65°	1799	878	707
70°	1665	705	638
75°	1496	616	576
80°	1252	510	494
85°	852	331	362

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2168 cd/sqm

TEST NUMBER: P909870

CATALOG NUMBER: DFN2DIP-TR3F0-050D030US840-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.6	2.8
10°-20°	536.9	7.7
20°-30°	753.8	10.8
30°-40°	821.7	11.8
40°-50°	755.2	10.8
50°-60°	593.1	8.5
60°-70°	386.1	5.5
70°-80°	198.7	2.9
80°-90°	53.5	0.8
90°-100°	59.3	0.9
100°-110°	188.4	2.7
110°-120°	322.4	4.6
120°-130°	424.0	6.1
130°-140°	475.9	6.8
140°-150°	466.7	6.7
150°-160°	391.5	5.6
160°-170°	259.6	3.7
170°-180°	90.7	1.3
0°-30°	1486.3	21.3
0°-40°	2308.0	33.1
0°-60°	3656.4	52.4
0°-90°	4294.7	61.6
90°-120°	570.1	8.2
90°-150°	1936.6	27.8
90°-180°	2678.0	38.4
0°-180°	6973.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2087	2087	2087	2087	2087	
5°	2087	2078	2053	2070	2064	198
15°	1985	1964	1900	1864	1845	559
25°	1802	1741	1617	1539	1511	829
35°	1552	1456	1290	1171	1129	972
45°	1269	1143	944	810	765	980
55°	965	818	614	500	465	862
65°	652	499	329	264	259	646
75°	348	215	151	138	136	368
85°	81	42	36	36	36	93
90°	1	10	28	27	28	7
95°	42	50	52	52	50	47
105°	174	176	178	179	179	184
115°	324	328	327	326	324	320
125°	471	478	475	473	472	420
135°	609	618	619	618	616	470
145°	739	745	749	750	747	462
155°	845	847	850	854	851	389
165°	919	918	918	924	920	259
175°	956	954	952	958	953	91
180°	958	958	958	958	958	

TEST NUMBER: P909870

CATALOG NUMBER: DFN2DIP-TR3F0-050D030US840-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2086.9	2086.9	2086.9	2086.9	2086.9
2.5°	2096.3	2086.9	2066.1	2085.1	2081.2
5°	2086.9	2077.5	2052.9	2069.8	2064.3
7.5°	2069.8	2058.6	2032.2	2039.6	2030.1
10°	2047.2	2034.0	1996.3	1990.5	1979.2
12.5°	2018.9	2002.0	1950.9	1939.6	1918.7
15°	1984.9	1964.1	1900.0	1864.1	1845.2
17.5°	1945.2	1915.0	1835.6	1794.1	1763.8
20°	1900.0	1862.1	1767.7	1720.6	1678.9
22.5°	1850.9	1807.4	1697.8	1633.7	1605.4
25°	1801.7	1741.2	1616.6	1539.2	1510.8
27.5°	1743.2	1678.9	1541.1	1452.3	1408.9
30°	1680.9	1609.0	1457.9	1361.7	1310.6
32.5°	1620.4	1533.5	1378.8	1265.4	1218.1
35°	1552.5	1456.1	1290.0	1170.9	1129.3
37.5°	1486.3	1382.4	1206.9	1076.4	1029.4
40°	1416.4	1303.2	1119.8	985.8	936.8
42.5°	1344.7	1223.9	1033.1	893.2	846.2
45°	1269.2	1142.6	944.3	810.1	764.8
47.5°	1197.4	1063.4	859.4	725.2	683.7
50°	1118.1	984.0	776.3	645.8	606.3
52.5°	1040.6	898.9	696.9	572.3	536.4
55°	965.0	817.7	613.7	500.5	464.6
57.5°	887.7	736.6	540.2	434.4	404.1
60°	808.3	657.2	462.6	366.5	336.2
62.5°	730.9	579.9	396.6	306.0	290.9
65°	651.6	498.6	328.6	264.5	258.7
67.5°	576.0	423.0	264.5	232.3	226.6
70°	496.8	349.4	219.0	200.2	192.6
72.5°	421.2	281.3	183.2	168.1	164.3
75°	347.5	215.2	151.1	137.8	136.0
77.5°	273.9	152.9	119.1	111.4	107.6
80°	205.8	109.6	90.6	83.1	83.1
82.5°	143.5	73.7	62.3	58.5	58.5
85°	81.2	41.5	35.9	35.9	35.9
87.5°	30.3	15.0	15.0	13.2	13.2
90°	0.9	10.4	28.3	26.6	27.5
92.5°	17.9	24.2	25.1	26.0	26.0
95°	42.2	50.3	51.7	51.7	50.3
97.5°	70.2	77.7	80.9	80.9	80.9
100°	102.5	109.2	111.5	111.5	110.7
102.5°	136.6	141.6	144.7	145.6	144.7
105°	173.9	176.2	177.9	179.4	179.4
107.5°	210.9	214.3	214.3	214.9	210.9
110°	246.7	251.4	251.4	251.4	249.0



TEST NUMBER: P909870

CATALOG NUMBER: DFN2DIP-TR3F0-050D030US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	285.4	290.3	289.4	287.1	285.4
115°	323.6	328.1	326.7	325.9	323.6
117.5°	361.3	367.7	363.7	361.3	359.0
120°	399.5	405.9	399.5	399.5	396.9
122.5°	434.1	442.2	438.2	435.9	434.1
125°	470.6	477.8	475.4	472.8	472.0
127.5°	506.0	515.0	511.9	508.4	506.0
130°	539.3	549.7	548.3	546.5	543.3
132.5°	576.5	584.6	585.2	581.2	578.9
135°	608.6	617.5	619.4	618.4	616.1
137.5°	644.4	651.7	653.1	652.6	649.0
140°	675.9	683.2	687.2	687.2	684.0
142.5°	708.3	715.5	717.8	718.7	715.5
145°	738.9	744.7	749.3	750.1	747.0
147.5°	766.4	773.6	777.0	778.5	775.3
150°	794.7	799.6	802.7	805.4	802.7
152.5°	819.8	824.7	828.7	831.9	828.7
155°	845.0	847.2	849.8	853.8	851.3
157.5°	866.6	868.3	869.8	875.6	871.5
160°	886.0	887.7	888.6	893.4	890.0
162.5°	903.8	903.8	904.7	910.2	906.2
165°	919.2	918.3	918.3	924.0	920.0
167.5°	933.0	930.4	930.4	936.1	932.1
170°	943.4	941.1	940.3	946.0	941.1
172.5°	950.6	948.4	947.5	953.2	948.4
175°	956.4	954.1	952.4	958.2	953.2
177.5°	959.6	957.3	955.5	960.5	955.5
180°	958.2	958.2	958.2	958.2	958.2

TEST NUMBER: P909870

CATALOG NUMBER: DFN2DIP-TR3F0-050D030US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.43	12.37	12.29	13.24	14.34	7.41	8.34	8.27	9.22	10.32
	3H	13.11	13.95	13.98	14.83	15.95	8.60	9.44	9.47	10.32	11.45
	4H	13.72	14.51	14.60	15.40	16.53	9.05	9.84	9.94	10.73	11.87
	6H	14.14	14.86	15.03	15.76	16.91	9.37	10.10	10.27	11.00	12.15
	8H	14.26	14.95	15.17	15.87	17.01	9.46	10.15	10.37	11.07	12.22
	12H	14.32	14.98	15.23	15.89	17.06	9.51	10.17	10.42	11.07	12.25
4H	2H	11.46	12.25	12.35	13.14	14.28	8.01	8.80	8.90	9.69	10.83
	3H	13.29	13.95	14.19	14.87	16.02	9.37	10.02	10.27	10.94	12.09
	4H	13.98	14.58	14.89	15.49	16.67	9.91	10.51	10.83	11.43	12.60
	6H	14.49	15.01	15.42	15.95	17.13	10.33	10.84	11.26	11.79	12.96
	8H	14.66	15.14	15.59	16.08	17.27	10.46	10.94	11.39	11.87	13.07
	12H	14.76	15.19	15.71	16.14	17.34	10.53	10.96	11.47	11.91	13.11
8H	4H	13.95	14.43	14.88	15.37	16.56	10.20	10.67	11.13	11.61	12.80
	6H	14.51	14.91	15.47	15.89	17.08	10.71	11.11	11.66	12.08	13.27
	8H	14.72	15.07	15.69	16.04	17.25	10.90	11.25	11.86	12.21	13.42
	12H	14.86	15.17	15.83	16.13	17.39	11.01	11.32	11.98	12.28	13.54
12H	4H	13.91	14.34	14.86	15.30	16.49	10.20	10.63	11.15	11.59	12.78
	6H	14.49	14.84	15.45	15.81	17.02	10.76	11.11	11.72	12.08	13.28
	8H	14.71	15.02	15.68	15.98	17.23	10.97	11.27	11.93	12.24	13.49

END OF REPORT