

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909916

Luminaire Tested: DFN2DIP-TR3F0-060D080US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909916
REPORT IS A COMBINATION OF REPORTS P900348 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-060D080US840-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12300.1 lumens
Efficiency: N/A
Efficacy: 103.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 118.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909916

CATALOG NUMBER: DFN2DIP-TR3F0-060D080US840-RLLFLL

Luminous Intensity Polar Plot

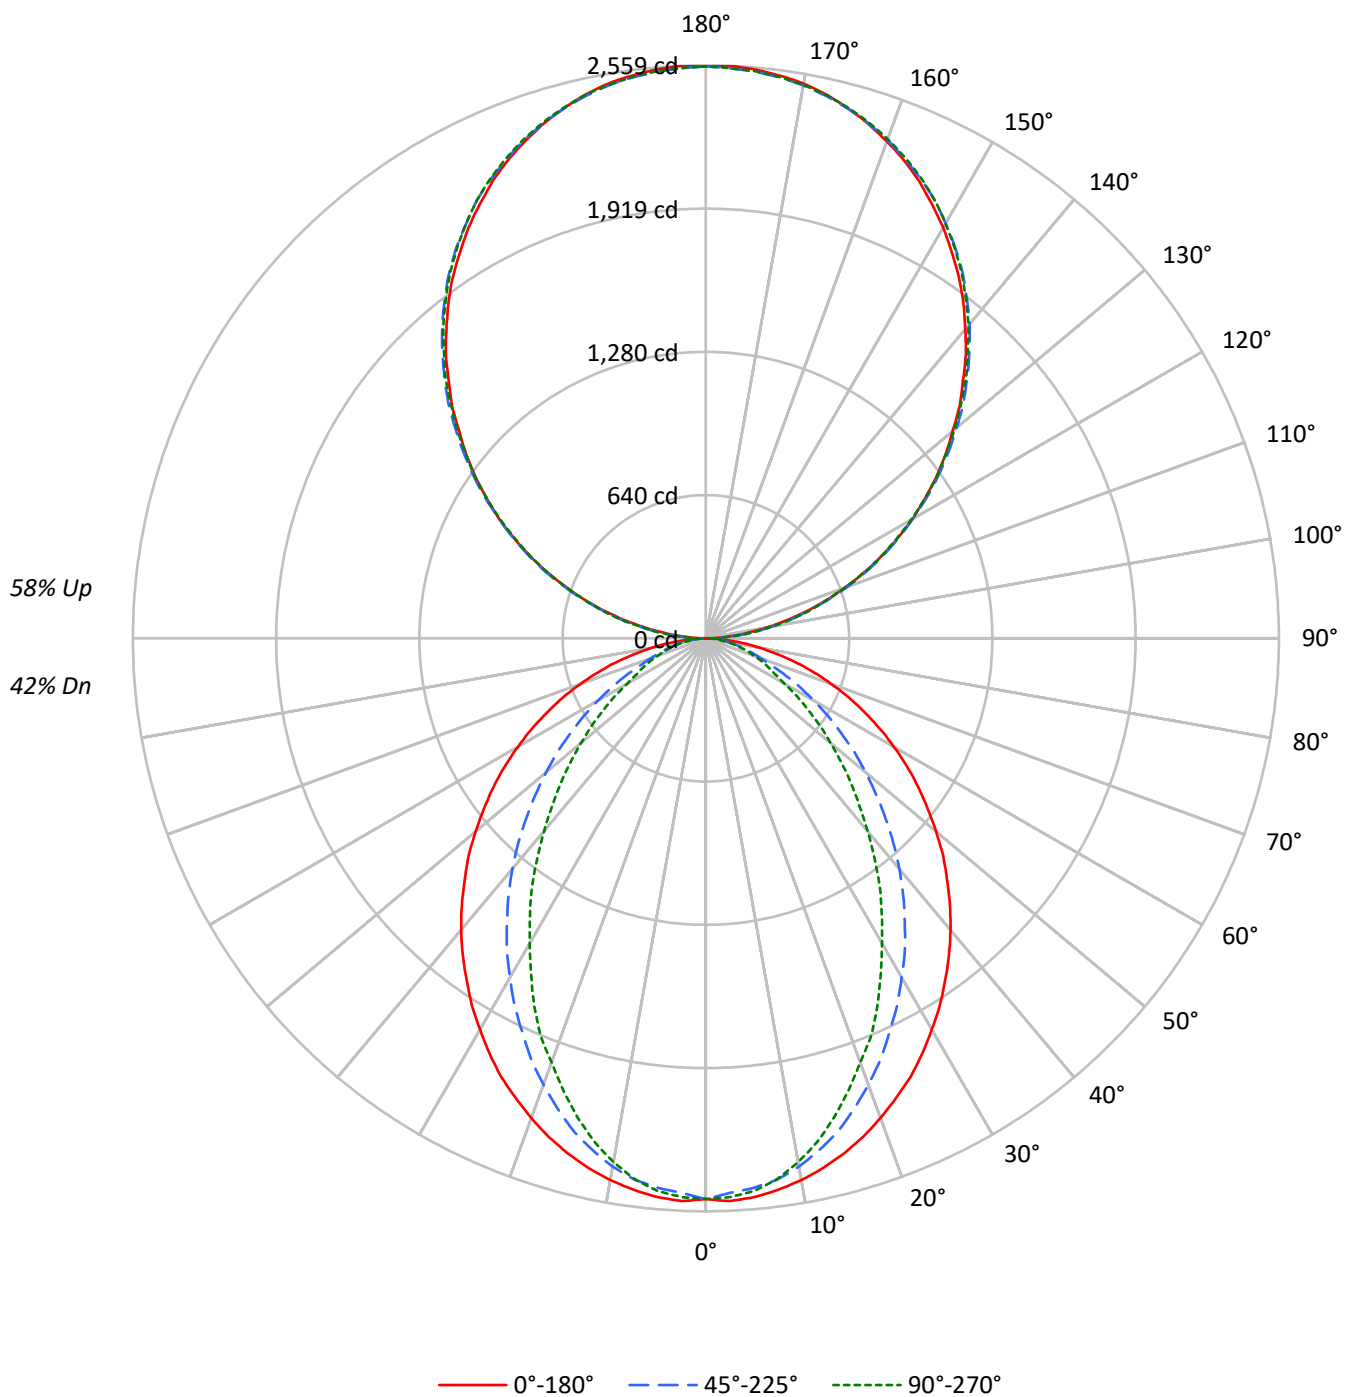

TEST NUMBER: P909916

CATALOG NUMBER: DFN2DIP-TR3F0-060D080US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36
3	81	72	65	59	73	66	60	55	55	50	47	44	41	39	35	33	31
4	74	64	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24
6	63	51	43	38	57	47	40	35	40	34	30	33	29	26	26	23	21
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	34	29	49	39	32	28	33	28	24	27	23	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	20	18	16
10	47	35	28	24	43	33	26	22	28	23	19	23	19	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3121	3121	3121
5°	3124	3068	3089
10°	3091	3006	2986
15°	3047	2904	2829
20°	2989	2764	2637
25°	2929	2609	2451
30°	2850	2449	2216
35°	2773	2278	2010
40°	2693	2101	1774
45°	2602	1905	1560
50°	2506	1708	1352
55°	2407	1497	1151
60°	2292	1277	945
65°	2159	1054	849
70°	1998	845	765
75°	1796	740	692
80°	1502	612	593
85°	1023	396	434

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2602 cd/sqm

TEST NUMBER: P909916

CATALOG NUMBER: DFN2DIP-TR3F0-060D080US840-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.7	1.9
10°-20°	644.3	5.2
20°-30°	904.6	7.4
30°-40°	986.1	8.0
40°-50°	906.3	7.4
50°-60°	711.7	5.8
60°-70°	463.3	3.8
70°-80°	238.5	1.9
80°-90°	68.2	0.6
90°-100°	158.1	1.3
100°-110°	502.4	4.1
110°-120°	859.7	7.0
120°-130°	1130.6	9.2
130°-140°	1269.1	10.3
140°-150°	1244.5	10.1
150°-160°	1043.9	8.5
160°-170°	692.3	5.6
170°-180°	242.0	2.0
0°-30°	1783.6	14.5
0°-40°	2769.6	22.5
0°-60°	4387.7	35.7
0°-90°	5157.6	41.9
90°-120°	1520.1	12.4
90°-150°	5164.3	42.0
90°-180°	7143.0	58.1
0°-180°	12300.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2504	2504	2504	2504	2504	
5°	2504	2493	2463	2484	2477	237
15°	2382	2357	2280	2237	2214	671
25°	2162	2090	1940	1847	1813	994
35°	1863	1747	1548	1405	1355	1166
45°	1523	1371	1133	972	918	1176
55°	1158	981	736	601	558	1035
65°	782	598	394	317	310	775
75°	417	258	181	165	163	441
85°	97	50	43	43	43	112
90°	2	28	76	71	73	12
95°	112	134	138	138	134	125
105°	464	470	474	478	478	489
115°	863	875	871	869	863	853
125°	1255	1274	1268	1261	1259	1121
135°	1623	1647	1652	1649	1643	1254
145°	1970	1986	1998	2000	1992	1231
155°	2253	2259	2266	2277	2270	1037
165°	2451	2449	2449	2464	2453	691
175°	2550	2544	2540	2555	2542	242
180°	2555	2555	2555	2555	2555	

TEST NUMBER: P909916

CATALOG NUMBER: DFN2DIP-TR3F0-060D080US840-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2504.3	2504.3	2504.3	2504.3	2504.3
2.5°	2515.6	2504.3	2479.2	2502.0	2497.5
5°	2504.3	2493.0	2463.4	2483.9	2477.1
7.5°	2483.9	2470.3	2438.6	2447.5	2436.2
10°	2456.6	2440.7	2395.6	2388.6	2375.1
12.5°	2422.8	2402.3	2341.0	2327.5	2302.5
15°	2381.9	2356.8	2279.9	2236.9	2214.2
17.5°	2334.3	2297.9	2202.7	2152.9	2116.7
20°	2279.9	2234.4	2121.2	2064.7	2014.7
22.5°	2221.0	2168.8	2037.3	1960.4	1926.4
25°	2162.1	2089.5	1940.0	1847.1	1813.0
27.5°	2091.9	2014.7	1849.3	1742.7	1690.6
30°	2017.1	1930.8	1749.5	1634.1	1572.8
32.5°	1944.5	1840.2	1654.6	1518.4	1461.7
35°	1863.0	1747.4	1548.0	1405.1	1355.1
37.5°	1783.6	1658.8	1448.2	1291.7	1235.2
40°	1699.7	1563.9	1343.8	1183.0	1124.1
42.5°	1613.7	1468.6	1239.7	1071.9	1015.4
45°	1523.0	1371.0	1133.3	972.1	917.8
47.5°	1436.9	1276.1	1031.3	870.2	820.4
50°	1341.7	1180.8	931.5	775.0	727.6
52.5°	1248.6	1078.6	836.3	686.7	643.7
55°	1158.0	981.3	736.5	600.7	557.5
57.5°	1065.2	883.8	648.2	521.3	484.9
60°	970.0	788.7	555.2	439.8	403.4
62.5°	877.2	695.9	475.8	367.2	349.1
65°	781.9	598.2	394.4	317.4	310.4
67.5°	691.3	507.6	317.4	278.7	272.0
70°	596.0	419.3	262.8	240.2	231.1
72.5°	505.4	337.6	219.7	201.8	197.1
75°	417.0	258.2	181.3	165.4	163.3
77.5°	328.7	183.5	142.8	133.7	129.2
80°	246.9	131.5	108.7	99.8	99.8
82.5°	172.2	88.5	74.7	70.2	70.2
85°	97.4	49.8	43.0	43.0	43.0
87.5°	36.4	18.1	18.1	15.9	15.9
90°	2.3	27.8	75.5	70.9	73.2
92.5°	47.8	64.7	67.1	69.3	69.3
95°	112.5	134.0	137.8	137.8	134.0
97.5°	187.2	207.2	215.7	215.7	215.7
100°	273.5	291.1	297.3	297.3	295.0
102.5°	364.4	377.5	385.9	388.2	385.9
105°	463.7	469.9	474.5	478.4	478.4
107.5°	562.3	571.6	571.6	573.1	562.3
110°	657.8	670.1	670.1	670.1	664.0

TEST NUMBER: P909916

CATALOG NUMBER: DFN2DIP-TR3F0-060D080US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	761.0	774.2	771.8	765.7	761.0
115°	862.7	875.0	871.2	868.9	862.7
117.5°	963.6	980.6	969.8	963.6	957.5
120°	1065.3	1082.3	1065.3	1065.3	1058.3
122.5°	1157.7	1179.3	1168.5	1162.4	1157.7
125°	1254.8	1274.0	1267.9	1260.9	1258.7
127.5°	1349.6	1373.4	1364.9	1355.7	1349.6
130°	1438.1	1465.8	1462.0	1457.4	1449.0
132.5°	1537.5	1559.0	1560.6	1549.8	1543.7
135°	1623.0	1646.9	1651.5	1649.2	1643.1
137.5°	1718.5	1737.8	1741.6	1740.1	1730.8
140°	1802.5	1821.7	1832.5	1832.5	1824.0
142.5°	1888.8	1908.0	1914.2	1916.5	1908.0
145°	1970.4	1985.8	1998.1	2000.4	1992.0
147.5°	2043.6	2062.9	2072.0	2076.0	2067.5
150°	2119.1	2132.1	2140.6	2147.6	2140.6
152.5°	2186.1	2199.2	2210.0	2218.5	2210.0
155°	2253.1	2259.3	2266.2	2276.9	2270.1
157.5°	2310.9	2315.5	2319.4	2334.7	2324.0
160°	2362.5	2367.1	2369.4	2382.5	2373.3
162.5°	2410.2	2410.2	2412.6	2427.2	2416.4
165°	2451.0	2448.7	2448.7	2464.2	2453.4
167.5°	2488.0	2481.1	2481.1	2496.5	2485.7
170°	2515.8	2509.6	2507.3	2522.7	2509.6
172.5°	2535.1	2528.9	2526.6	2541.9	2528.9
175°	2550.4	2544.3	2539.6	2555.1	2541.9
177.5°	2558.9	2552.7	2548.1	2561.2	2548.1
180°	2555.1	2555.1	2555.1	2555.1	2555.1

TEST NUMBER: P909916

CATALOG NUMBER: DFN2DIP-TR3F0-060D080US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.24	11.01	11.27	12.05	13.43	6.22	6.99	7.25	8.02	9.41
	3H	11.91	12.59	12.95	13.64	15.04	7.40	8.09	8.44	9.13	10.53
	4H	12.51	13.16	13.56	14.20	15.61	7.84	8.49	8.89	9.54	10.95
	6H	12.92	13.52	13.98	14.56	15.99	8.16	8.76	9.22	9.80	11.23
	8H	13.04	13.61	14.10	14.67	16.09	8.24	8.81	9.31	9.88	11.29
	12H	13.09	13.63	14.16	14.69	16.13	8.28	8.82	9.35	9.88	11.32
4H	2H	10.25	10.90	11.31	11.95	13.36	6.80	7.45	7.86	8.50	9.91
	3H	12.07	12.61	13.13	13.68	15.10	8.14	8.68	9.21	9.75	11.18
	4H	12.75	13.24	13.82	14.31	15.75	8.68	9.18	9.75	10.24	11.69
	6H	13.25	13.68	14.33	14.76	16.20	9.09	9.52	10.17	10.60	12.04
	8H	13.42	13.82	14.50	14.90	16.35	9.22	9.61	10.30	10.69	12.15
	12H	13.51	13.87	14.61	14.96	16.42	9.28	9.63	10.37	10.73	12.19
8H	4H	12.71	13.11	13.79	14.19	15.64	8.95	9.35	10.03	10.43	11.88
	6H	13.26	13.59	14.37	14.71	16.17	9.46	9.79	10.56	10.91	12.36
	8H	13.47	13.76	14.58	14.86	16.34	9.65	9.93	10.76	11.04	12.51
	12H	13.60	13.86	14.72	14.95	16.47	9.76	10.01	10.87	11.11	12.62
12H	4H	12.66	13.02	13.76	14.11	15.57	8.95	9.31	10.05	10.40	11.86
	6H	13.24	13.53	14.35	14.63	16.10	9.51	9.79	10.62	10.90	12.37
	8H	13.45	13.70	14.56	14.80	16.31	9.71	9.96	10.82	11.06	12.57

END OF REPORT