

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912553

Luminaire Tested: DFN2DIP-TR3F0-030D050US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912553
REPORT IS A COMBINATION OF REPORTS P901819 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D050US850-FLLONL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8783.3 lumens
Efficiency: N/A
Efficacy: 143.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 61.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912553

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US850-FLLONL

Luminous Intensity Polar Plot

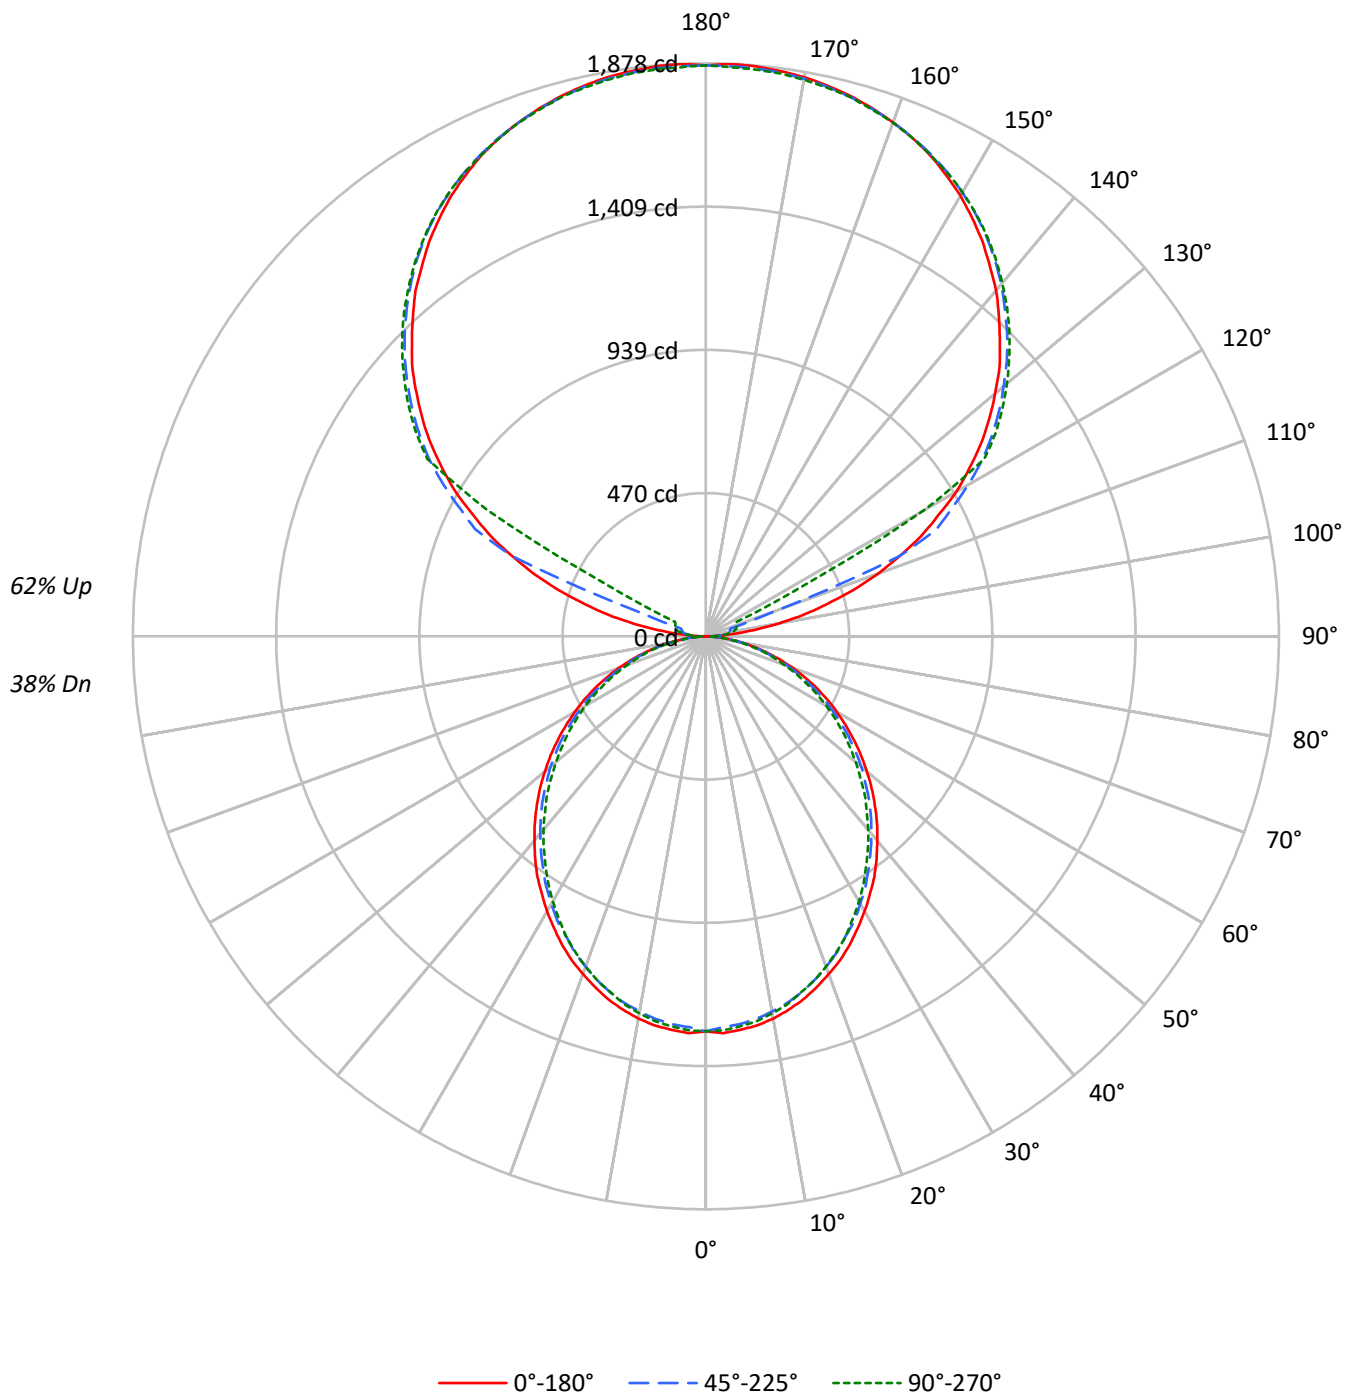

TEST NUMBER: P912553

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US850-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45
1	95	91	87	83	86	82	79	76	67	65	63	53	51	50	39	39	38
2	86	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20
6	61	49	41	35	55	45	38	33	37	32	28	29	26	23	22	20	18
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	20	18	16
8	52	40	32	27	47	37	30	25	30	25	22	24	21	18	19	16	14
9	48	36	29	24	44	33	27	23	28	23	19	22	19	16	17	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1613	1613	1613
5°	1615	1589	1600
10°	1601	1567	1578
15°	1576	1539	1543
20°	1544	1502	1507
25°	1511	1458	1466
30°	1471	1417	1414
35°	1432	1368	1359
40°	1385	1319	1307
45°	1338	1270	1253
50°	1286	1219	1191
55°	1232	1159	1134
60°	1170	1088	1068
65°	1104	1015	991
70°	1018	925	907
75°	900	818	828
80°	757	680	681
85°	535	448	440

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1338 cd/sqm

TEST NUMBER: P912553

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.8	1.4
10°-20°	342.8	3.9
20°-30°	503.8	5.7
30°-40°	585.2	6.7
40°-50°	584.4	6.7
50°-60°	509.6	5.8
60°-70°	376.7	4.3
70°-80°	213.1	2.4
80°-90°	59.5	0.7
90°-100°	61.7	0.7
100°-110°	230.0	2.6
110°-120°	610.1	6.9
120°-130°	1011.9	11.5
130°-140°	1074.8	12.2
140°-150°	999.0	11.4
150°-160°	803.1	9.1
160°-170°	517.5	5.9
170°-180°	178.1	2.0
0°-30°	968.5	11.0
0°-40°	1553.6	17.7
0°-60°	2647.7	30.1
0°-90°	3297.0	37.5
90°-120°	901.9	10.3
90°-150°	3987.5	45.4
90°-180°	5486.0	62.5
0°-180°	8783.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1294	1294	1294	1294	1294	
5°	1294	1290	1276	1286	1283	123
15°	1232	1225	1209	1214	1208	347
25°	1115	1106	1084	1087	1084	513
35°	962	950	930	922	916	601
45°	783	774	756	742	737	604
55°	593	585	570	555	549	530
65°	400	392	380	368	362	395
75°	209	207	200	193	196	223
85°	51	50	49	45	44	57
90°	1	16	27	34	36	8
95°	88	43	53	60	58	104
105°	412	452	83	98	103	440
115°	779	802	836	209	111	767
125°	1101	1118	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1611	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1833	1825	1829	1839	1829	518
175°	1875	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P912553

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1294.5	1294.5	1294.5	1294.5	1294.5
2.5°	1302.1	1295.9	1282.1	1294.5	1292.2
5°	1294.5	1289.7	1275.9	1285.9	1283.4
7.5°	1285.9	1278.5	1264.7	1274.8	1272.2
10°	1272.2	1263.5	1248.6	1258.5	1254.8
12.5°	1253.5	1246.1	1231.2	1237.3	1234.9
15°	1232.3	1225.0	1208.7	1213.7	1207.5
17.5°	1206.1	1198.8	1182.5	1188.7	1182.5
20°	1177.5	1170.1	1152.7	1156.4	1151.5
22.5°	1149.0	1137.8	1121.5	1121.5	1119.0
25°	1115.3	1105.5	1084.3	1086.7	1084.3
27.5°	1077.9	1069.2	1053.1	1049.4	1043.2
30°	1040.7	1030.7	1012.1	1008.3	1003.3
32.5°	1000.9	993.4	973.5	965.9	960.9
35°	962.3	949.9	929.9	922.4	916.1
37.5°	918.7	907.5	887.5	878.8	872.6
40°	873.9	863.9	843.9	832.9	827.9
42.5°	830.3	820.3	800.5	787.9	780.5
45°	783.1	774.3	755.6	741.9	736.9
47.5°	736.9	728.3	708.3	694.6	687.1
50°	688.4	682.1	664.7	647.3	641.1
52.5°	641.1	632.4	616.3	602.5	593.8
55°	592.6	585.1	570.1	555.3	549.1
57.5°	544.0	537.8	521.6	506.6	501.6
60°	495.4	490.5	473.1	459.3	455.7
62.5°	448.1	439.4	427.0	414.5	409.6
65°	399.7	392.1	379.7	368.5	362.3
67.5°	349.9	343.6	332.4	323.7	318.7
70°	303.8	298.8	287.6	278.8	273.9
72.5°	256.5	251.4	245.2	236.5	232.9
75°	209.0	206.7	200.4	193.0	195.5
77.5°	166.8	161.8	159.3	155.6	151.9
80°	124.5	123.2	120.7	117.0	114.6
82.5°	84.6	84.6	83.5	78.4	78.4
85°	51.0	49.8	48.6	44.8	43.6
87.5°	22.4	20.0	17.4	13.8	12.4
90°	1.3	16.2	27.1	33.9	36.5
92.5°	33.9	28.5	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.4
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.4	80.0	94.7	98.9
105°	411.7	452.4	82.6	97.5	102.9
107.5°	507.8	541.5	85.4	100.1	105.7
110°	600.0	628.2	237.0	101.6	106.9

TEST NUMBER: P912553

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.6	710.9	687.9	104.2	108.3
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.5	885.5	908.7	714.9	360.2
120°	947.9	968.2	992.6	1008.9	826.0
122.5°	1023.6	1045.3	1072.5	1080.6	1082.1
125°	1100.8	1118.5	1144.3	1153.7	1157.8
127.5°	1171.2	1190.2	1210.7	1224.1	1225.4
130°	1237.6	1259.4	1274.1	1289.1	1287.9
132.5°	1305.4	1323.0	1337.8	1350.1	1348.8
135°	1362.3	1384.0	1396.0	1409.8	1407.0
137.5°	1421.7	1438.0	1451.7	1465.2	1461.2
140°	1480.0	1490.9	1505.7	1517.9	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1559.9
145°	1580.3	1578.9	1601.8	1611.4	1604.6
147.5°	1624.9	1620.8	1643.9	1650.6	1645.3
150°	1668.3	1658.8	1680.5	1688.6	1681.8
152.5°	1704.8	1694.0	1714.3	1722.5	1713.0
155°	1740.0	1727.9	1744.1	1752.2	1741.5
157.5°	1768.4	1757.7	1769.9	1779.4	1768.4
160°	1792.9	1784.7	1792.9	1800.9	1791.5
162.5°	1814.4	1806.5	1813.1	1822.6	1810.4
165°	1833.4	1825.4	1829.4	1838.8	1829.4
167.5°	1848.4	1840.2	1844.4	1853.8	1841.6
170°	1860.6	1852.4	1855.1	1864.6	1852.4
172.5°	1868.7	1860.6	1863.3	1872.8	1860.6
175°	1875.4	1865.9	1868.7	1878.1	1864.6
177.5°	1878.1	1868.7	1870.1	1879.5	1867.3
180°	1871.3	1871.3	1871.3	1871.3	1871.3

TEST NUMBER: P912553

CATALOG NUMBER: DFN2DIP-TR3F0-030D050US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.61	8.37	8.66	9.43	10.87	7.18	7.94	8.23	9.00	10.44
	3H	9.25	9.93	10.32	11.00	12.46	8.78	9.46	9.85	10.53	11.99
	4H	9.83	10.47	10.90	11.54	13.01	9.36	10.00	10.44	11.07	12.54
	6H	10.21	10.81	11.30	11.88	13.36	9.74	10.34	10.83	11.41	12.89
	8H	10.31	10.88	11.40	11.97	13.44	9.84	10.41	10.93	11.50	12.97
	12H	10.35	10.89	11.45	11.97	13.47	9.88	10.42	10.98	11.50	12.99
4H	2H	8.05	8.70	9.14	9.77	11.23	7.71	8.35	8.79	9.43	10.89
	3H	9.90	10.44	10.99	11.54	13.01	9.51	10.05	10.60	11.15	12.62
	4H	10.60	11.09	11.70	12.18	13.68	10.20	10.69	11.30	11.78	13.28
	6H	11.10	11.53	12.21	12.64	14.13	10.70	11.12	11.80	12.23	13.72
	8H	11.24	11.64	12.35	12.74	14.25	10.84	11.23	11.94	12.34	13.84
	12H	11.31	11.67	12.43	12.78	14.29	10.89	11.25	12.01	12.37	13.88
8H	4H	10.79	11.18	11.89	12.29	13.79	10.43	10.82	11.53	11.93	13.43
	6H	11.40	11.73	12.53	12.87	14.38	11.04	11.37	12.17	12.52	14.02
	8H	11.61	11.90	12.75	13.03	14.55	11.25	11.54	12.38	12.66	14.19
	12H	11.73	11.99	12.87	13.11	14.67	11.36	11.61	12.49	12.73	14.29
12H	4H	10.76	11.12	11.89	12.24	13.75	10.42	10.77	11.54	11.89	13.40
	6H	11.43	11.71	12.56	12.84	14.37	11.08	11.37	12.21	12.49	14.02
	8H	11.66	11.91	12.80	13.03	14.59	11.31	11.56	12.44	12.68	14.24