

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912660

Luminaire Tested: DFN2DIP-TR3F0-070D060US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912660
REPORT IS A COMBINATION OF REPORTS P900321 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D060US850-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13574.2 lumens
Efficiency: N/A
Efficacy: 117.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 115.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912660

CATALOG NUMBER: DFN2DIP-TR3F0-070D060US850-FLLFLL

Luminous Intensity Polar Plot

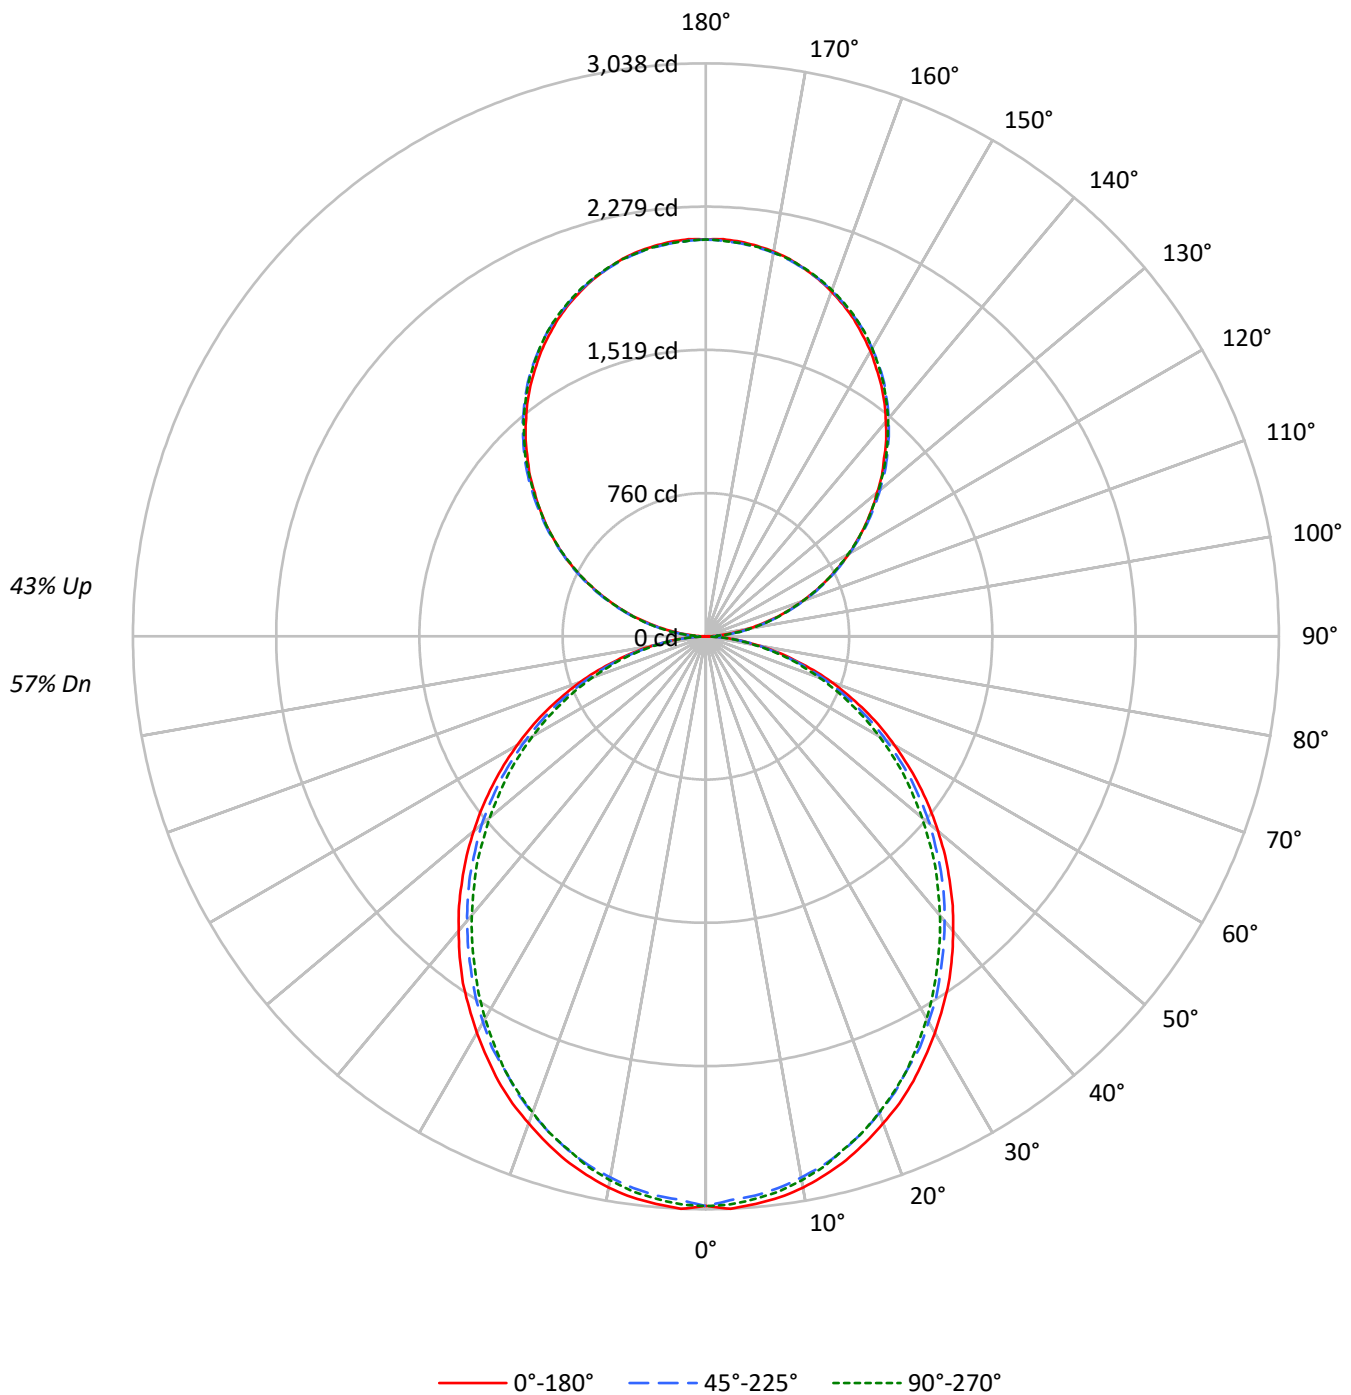

TEST NUMBER: P912660

CATALOG NUMBER: DFN2DIP-TR3F0-070D060US850-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	99	95	91	87	92	88	85	82	76	74	72	65	63	62	55	54	53
2	90	83	77	71	84	77	72	67	67	63	59	57	54	52	48	46	44
3	82	73	65	60	76	68	62	56	59	54	50	51	47	44	43	40	38
4	75	65	57	50	70	60	53	48	53	47	43	45	41	37	38	35	33
5	69	58	49	43	64	54	47	41	47	41	37	41	36	32	35	31	28
6	64	52	43	38	59	48	41	36	42	36	32	37	32	28	31	28	25
7	59	47	39	33	55	44	37	31	38	33	28	33	29	25	29	25	22
8	55	42	35	29	51	40	33	28	35	29	25	31	26	23	26	23	20
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	24	21	18
10	48	36	28	23	45	34	27	22	30	24	20	26	22	18	23	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3764	3764	3764
5°	3768	3708	3734
10°	3735	3655	3681
15°	3678	3592	3599
20°	3602	3505	3516
25°	3526	3402	3420
30°	3431	3306	3299
35°	3342	3193	3171
40°	3231	3078	3048
45°	3121	2964	2923
50°	3001	2843	2779
55°	2874	2704	2645
60°	2731	2539	2492
65°	2575	2367	2311
70°	2376	2158	2116
75°	2100	1907	1932
80°	1768	1587	1588
85°	1249	1046	1025

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3121 cd/sqm

TEST NUMBER: P912660

CATALOG NUMBER: DFN2DIP-TR3F0-070D060US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	284.3	2.1
10°-20°	799.9	5.9
20°-30°	1175.6	8.7
30°-40°	1365.3	10.1
40°-50°	1363.6	10.0
50°-60°	1189.1	8.8
60°-70°	879.0	6.5
70°-80°	497.3	3.7
80°-90°	137.2	1.0
90°-100°	130.2	1.0
100°-110°	413.7	3.0
110°-120°	708.0	5.2
120°-130°	931.2	6.9
130°-140°	1045.3	7.7
140°-150°	1025.0	7.6
150°-160°	859.8	6.3
160°-170°	570.2	4.2
170°-180°	199.3	1.5
0°-30°	2259.8	16.6
0°-40°	3625.1	26.7
0°-60°	6177.8	45.5
0°-90°	7691.4	56.7
90°-120°	1252.0	9.2
90°-150°	4253.5	31.3
90°-180°	5883.0	43.3
0°-180°	13574.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3021	3021	3021	3021	3021	
5°	3021	3009	2977	3000	2995	287
15°	2876	2858	2820	2832	2818	810
25°	2602	2579	2530	2536	2530	1198
35°	2245	2216	2170	2152	2138	1402
45°	1827	1807	1763	1731	1720	1410
55°	1383	1365	1330	1296	1281	1236
65°	933	915	886	860	845	922
75°	488	482	467	450	456	521
85°	119	116	114	104	102	133
90°	2	23	62	58	60	13
95°	93	110	114	114	110	103
105°	382	387	391	394	394	403
115°	710	721	718	716	710	703
125°	1034	1049	1044	1039	1037	924
135°	1337	1356	1360	1358	1353	1033
145°	1623	1636	1646	1648	1641	1014
155°	1856	1861	1866	1875	1870	854
165°	2019	2017	2017	2030	2021	569
175°	2101	2096	2092	2104	2094	200
180°	2104	2104	2104	2104	2104	

TEST NUMBER: P912660

CATALOG NUMBER: DFN2DIP-TR3F0-070D060US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3020.6	3020.6	3020.6	3020.6	3020.6
2.5°	3038.2	3023.7	2991.6	3020.6	3015.0
5°	3020.6	3009.3	2977.2	3000.3	2994.7
7.5°	3000.3	2983.0	2950.9	2974.4	2968.6
10°	2968.6	2948.2	2913.3	2936.5	2927.9
12.5°	2924.8	2907.6	2872.8	2887.2	2881.3
15°	2875.5	2858.2	2820.3	2832.1	2817.5
17.5°	2814.4	2797.2	2759.3	2773.8	2759.3
20°	2747.5	2730.4	2689.7	2698.3	2686.9
22.5°	2681.0	2654.8	2616.9	2616.9	2611.0
25°	2602.5	2579.3	2530.1	2535.6	2530.1
27.5°	2515.2	2494.9	2457.3	2448.7	2434.1
30°	2428.4	2404.9	2361.5	2352.9	2341.1
32.5°	2335.2	2318.0	2271.5	2253.9	2242.2
35°	2245.3	2216.3	2169.8	2152.2	2137.7
37.5°	2143.6	2117.4	2070.8	2050.5	2036.0
40°	2039.1	2015.7	1969.1	1943.3	1931.5
42.5°	1937.4	1914.0	1867.8	1838.5	1821.2
45°	1827.1	1806.8	1763.0	1731.3	1719.5
47.5°	1719.5	1699.2	1652.6	1620.6	1603.4
50°	1606.2	1591.6	1550.9	1510.3	1495.8
52.5°	1495.8	1475.5	1437.9	1405.9	1385.5
55°	1382.7	1365.2	1330.4	1295.5	1281.0
57.5°	1269.4	1254.8	1216.9	1182.1	1170.4
60°	1155.9	1144.5	1103.9	1071.8	1063.2
62.5°	1045.6	1025.3	996.3	967.4	955.6
65°	932.6	914.9	886.0	859.8	845.3
67.5°	816.3	801.6	775.6	755.3	743.6
70°	708.8	697.1	670.8	650.5	639.1
72.5°	598.4	586.8	572.2	551.9	543.3
75°	487.8	482.3	467.4	450.3	456.1
77.5°	389.3	377.5	371.6	363.0	354.4
80°	290.6	287.6	281.7	273.0	267.2
82.5°	197.5	197.5	194.7	183.1	183.1
85°	119.0	116.2	113.5	104.5	101.7
87.5°	52.3	46.6	40.7	32.1	28.9
90°	1.9	22.8	62.2	58.3	60.2
92.5°	39.4	53.3	55.2	57.1	57.1
95°	92.6	110.3	113.6	113.6	110.3
97.5°	154.2	170.7	177.7	177.7	177.7
100°	225.2	239.8	244.9	244.9	243.0
102.5°	300.1	310.9	317.8	319.7	317.8
105°	381.9	387.0	390.8	394.0	394.0
107.5°	463.1	470.8	470.8	472.0	463.1
110°	541.9	551.9	551.9	551.9	546.8



TEST NUMBER: P912660

CATALOG NUMBER: DFN2DIP-TR3F0-070D060US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	626.8	637.6	635.7	630.6	626.8
115°	710.5	720.7	717.5	715.6	710.5
117.5°	793.7	807.7	798.7	793.7	788.6
120°	877.4	891.4	877.4	877.4	871.7
122.5°	953.5	971.3	962.4	957.4	953.5
125°	1033.5	1049.3	1044.2	1038.6	1036.7
127.5°	1111.6	1131.2	1124.2	1116.7	1111.6
130°	1184.5	1207.4	1204.2	1200.4	1193.4
132.5°	1266.4	1284.1	1285.3	1276.5	1271.4
135°	1336.8	1356.4	1360.2	1358.3	1353.2
137.5°	1415.4	1431.3	1434.5	1433.2	1425.6
140°	1484.6	1500.5	1509.3	1509.3	1502.4
142.5°	1555.6	1571.5	1576.6	1578.4	1571.5
145°	1622.9	1635.6	1645.8	1647.6	1640.7
147.5°	1683.1	1699.0	1706.6	1709.7	1702.8
150°	1745.3	1756.1	1763.1	1768.7	1763.1
152.5°	1800.5	1811.3	1820.2	1827.2	1820.2
155°	1855.7	1860.8	1866.4	1875.4	1869.7
157.5°	1903.3	1907.1	1910.3	1923.0	1914.1
160°	1945.9	1949.6	1951.5	1962.3	1954.7
162.5°	1985.1	1985.1	1987.0	1999.1	1990.2
165°	2018.7	2016.8	2016.8	2029.6	2020.7
167.5°	2049.2	2043.6	2043.6	2056.2	2047.3
170°	2072.1	2067.0	2065.1	2077.7	2067.0
172.5°	2087.9	2082.8	2080.9	2093.6	2082.8
175°	2100.6	2095.6	2091.7	2104.4	2093.6
177.5°	2107.5	2102.6	2098.7	2109.4	2098.7
180°	2104.4	2104.4	2104.4	2104.4	2104.4

TEST NUMBER: P912660

CATALOG NUMBER: DFN2DIP-TR3F0-070D060US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.42	13.34	13.32	14.26	15.43	11.99	12.91	12.89	13.83	15.00
	3H	14.07	14.90	14.98	15.83	17.03	13.61	14.43	14.51	15.36	16.56
	4H	14.66	15.44	15.58	16.37	17.58	14.19	14.97	15.11	15.91	17.11
	6H	15.05	15.78	15.99	16.72	17.94	14.58	15.31	15.52	16.25	17.47
	8H	15.16	15.85	16.10	16.80	18.02	14.69	15.38	15.63	16.33	17.55
	12H	15.20	15.86	16.15	16.81	18.05	14.73	15.39	15.68	16.34	17.58
4H	2H	12.88	13.67	13.81	14.60	15.81	12.54	13.33	13.47	14.26	15.46
	3H	14.74	15.40	15.68	16.36	17.58	14.36	15.01	15.30	15.97	17.19
	4H	15.45	16.05	16.40	17.01	18.26	15.05	15.65	16.00	16.61	17.85
	6H	15.96	16.48	16.93	17.46	18.71	15.56	16.08	16.52	17.06	18.30
	8H	16.11	16.59	17.08	17.57	18.83	15.70	16.19	16.67	17.16	18.42
	12H	16.18	16.62	17.17	17.61	18.87	15.77	16.20	16.75	17.19	18.46
8H	4H	15.65	16.13	16.62	17.11	18.37	15.29	15.78	16.26	16.75	18.01
	6H	16.27	16.67	17.27	17.69	18.95	15.92	16.32	16.91	17.33	18.59
	8H	16.49	16.84	17.49	17.85	19.12	16.13	16.48	17.13	17.48	18.76
	12H	16.62	16.93	17.62	17.93	19.25	16.24	16.55	17.24	17.55	18.87
12H	4H	15.64	16.07	16.62	17.07	18.33	15.29	15.73	16.28	16.72	17.98
	6H	16.30	16.66	17.30	17.66	18.94	15.96	16.31	16.96	17.31	18.59
	8H	16.54	16.85	17.54	17.85	19.17	16.19	16.50	17.19	17.50	18.82