

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912715

Luminaire Tested: DFN2DIP-TR3F0-090D060US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912715
REPORT IS A COMBINATION OF REPORTS P901846 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-090D060US850-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15071.3 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 140
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912715

CATALOG NUMBER: DFN2DIP-TR3F0-090D060US850-RLLONL

Luminous Intensity Polar Plot

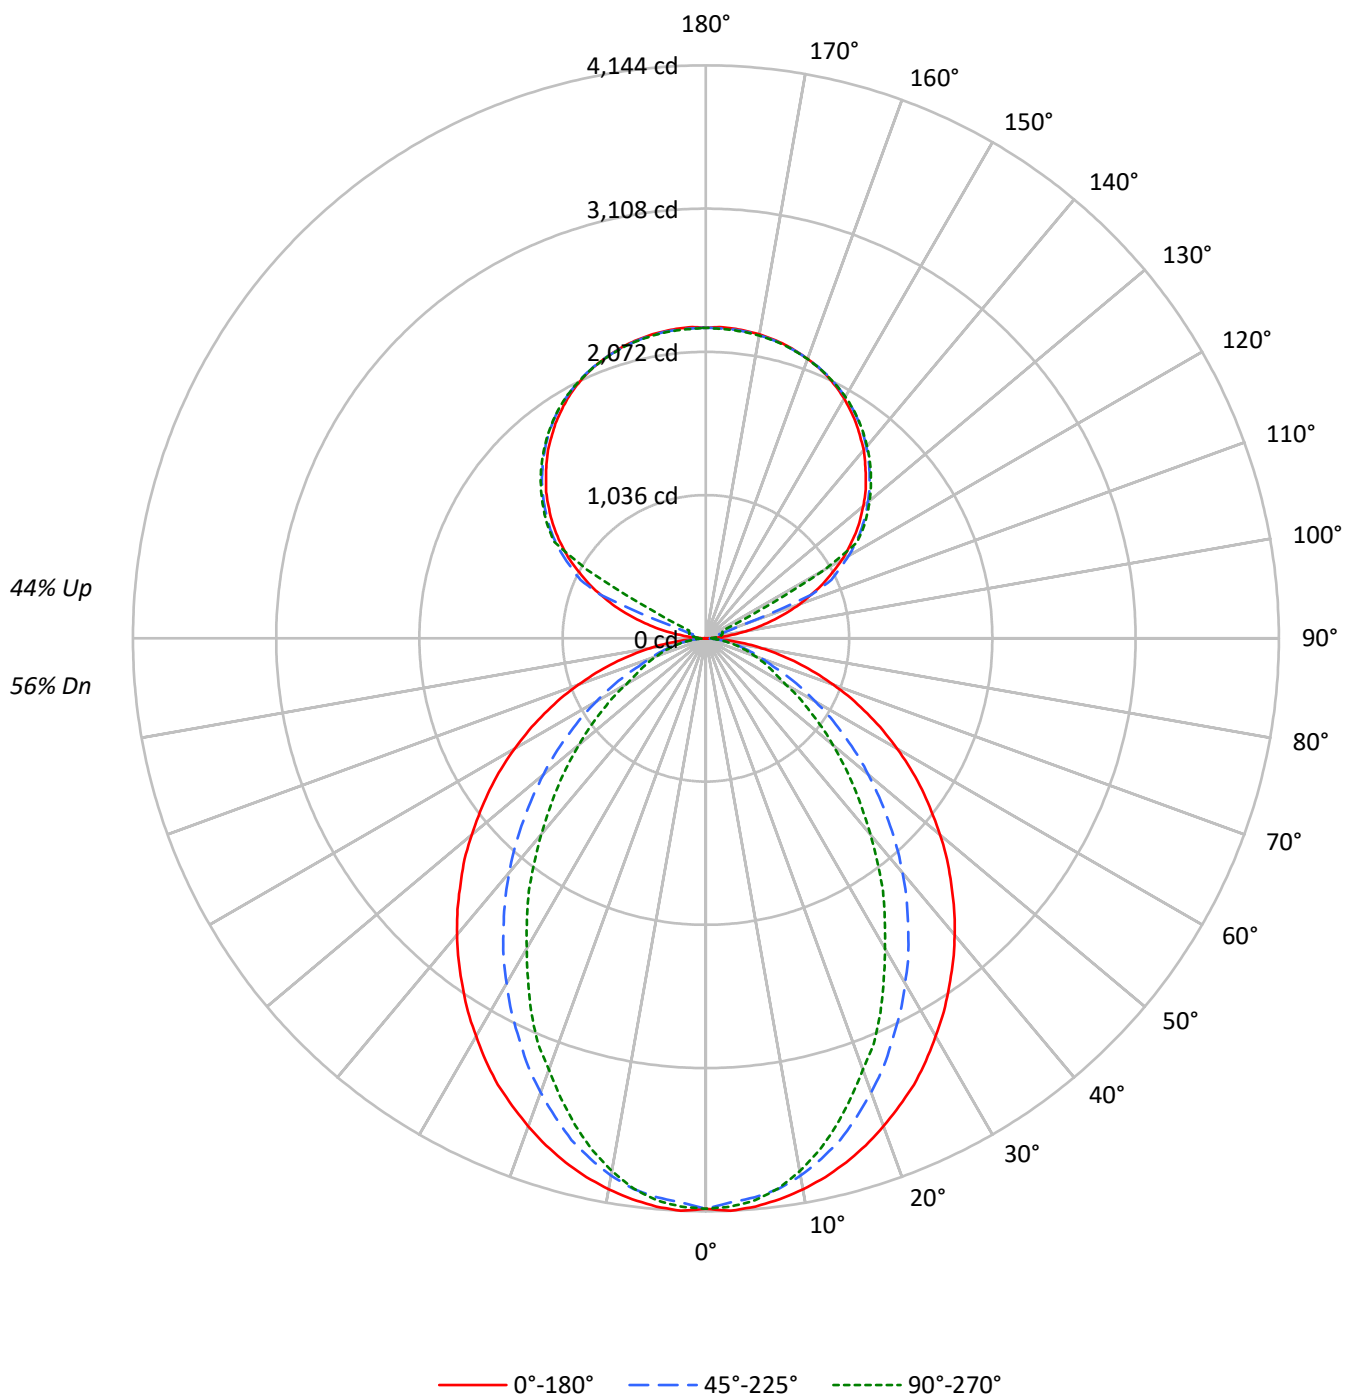

TEST NUMBER: P912715

CATALOG NUMBER: DFN2DIP-TR3F0-090D060US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5140	5140	5140
5°	5146	5054	5088
10°	5092	4951	4919
15°	5019	4783	4660
20°	4923	4553	4343
25°	4826	4297	4037
30°	4695	4034	3651
35°	4567	3752	3311
40°	4437	3461	2922
45°	4285	3138	2570
50°	4129	2813	2226
55°	3965	2466	1896
60°	3775	2104	1558
65°	3556	1736	1398
70°	3291	1393	1260
75°	2957	1219	1139
80°	2475	1009	977
85°	1684	653	715

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4285 cd/sqm

TEST NUMBER: P912715

CATALOG NUMBER: DFN2DIP-TR3F0-090D060US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	386.6	2.6
10°-20°	1061.3	7.0
20°-30°	1490.1	9.9
30°-40°	1624.3	10.8
40°-50°	1492.9	9.9
50°-60°	1172.4	7.8
60°-70°	763.1	5.1
70°-80°	392.8	2.6
80°-90°	104.3	0.7
90°-100°	74.1	0.5
100°-110°	276.0	1.8
110°-120°	732.1	4.9
120°-130°	1214.2	8.1
130°-140°	1289.8	8.6
140°-150°	1198.7	8.0
150°-160°	963.8	6.4
160°-170°	621.0	4.1
170°-180°	213.7	1.4
0°-30°	2938.0	19.5
0°-40°	4562.3	30.3
0°-60°	7227.6	48.0
0°-90°	8487.8	56.3
90°-120°	1082.2	7.2
90°-150°	4785.0	31.7
90°-180°	6583.0	43.7
0°-180°	15071.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4125	4125	4125	4125	4125	
5°	4125	4106	4058	4091	4080	391
15°	3924	3882	3756	3685	3648	1106
25°	3562	3442	3196	3043	2986	1638
35°	3069	2878	2550	2315	2232	1921
45°	2509	2258	1867	1601	1512	1937
55°	1908	1616	1213	989	918	1705
65°	1288	986	650	523	511	1277
75°	687	425	299	272	269	726
85°	160	82	71	71	71	184
90°	2	20	32	41	44	14
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P912715

CATALOG NUMBER: DFN2DIP-TR3F0-090D060US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4125.1	4125.1	4125.1	4125.1	4125.1
2.5°	4143.8	4125.1	4083.9	4121.6	4114.1
5°	4125.1	4106.5	4057.8	4091.4	4080.3
7.5°	4091.4	4069.3	4017.0	4031.7	4013.0
10°	4046.7	4020.6	3946.2	3934.6	3912.4
12.5°	3990.8	3957.2	3856.2	3834.0	3792.8
15°	3923.5	3882.4	3755.6	3684.7	3647.5
17.5°	3845.1	3785.3	3628.4	3546.5	3486.7
20°	3755.6	3680.8	3494.1	3401.1	3318.7
22.5°	3658.6	3572.6	3355.9	3229.2	3173.4
25°	3561.6	3441.9	3195.6	3042.7	2986.4
27.5°	3445.9	3318.7	3046.2	2870.8	2784.8
30°	3322.7	3180.5	2881.8	2691.8	2590.7
32.5°	3203.0	3031.1	2725.4	2501.2	2407.7
35°	3068.8	2878.3	2549.9	2314.7	2232.3
37.5°	2938.1	2732.6	2385.6	2127.7	2034.7
40°	2799.9	2576.1	2213.7	1948.7	1851.7
42.5°	2658.1	2419.3	2042.1	1765.7	1672.6
45°	2508.8	2258.5	1866.7	1601.3	1511.8
47.5°	2366.9	2102.0	1698.8	1433.4	1351.4
50°	2210.1	1945.1	1534.4	1276.6	1198.5
52.5°	2056.9	1776.8	1377.6	1131.2	1060.3
55°	1907.5	1616.4	1213.1	989.4	918.5
57.5°	1754.7	1456.0	1067.9	858.7	798.9
60°	1597.7	1299.1	914.6	724.4	664.6
62.5°	1444.9	1146.3	783.8	604.8	575.1
65°	1288.0	985.5	649.5	522.8	511.4
67.5°	1138.7	836.1	522.8	459.0	447.9
70°	981.9	690.8	433.0	395.7	380.6
72.5°	832.5	556.1	362.0	332.3	324.8
75°	686.8	425.4	298.7	272.5	268.9
77.5°	541.4	302.2	235.2	220.2	212.7
80°	406.8	216.7	179.0	164.4	164.4
82.5°	283.6	145.7	123.2	115.7	115.7
85°	160.4	82.0	70.9	70.9	70.9
87.5°	59.8	29.7	29.7	26.2	26.2
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P912715

CATALOG NUMBER: DFN2DIP-TR3F0-090D060US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P912715

CATALOG NUMBER: DFN2DIP-TR3F0-090D060US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.35	14.24	14.26	15.16	16.34	9.33	10.22	10.24	11.14	12.32
	3H	15.03	15.82	15.95	16.75	17.95	10.52	11.31	11.44	12.24	13.45
	4H	15.63	16.38	16.57	17.31	18.53	10.97	11.71	11.90	12.65	13.87
	6H	16.05	16.74	16.99	17.68	18.91	11.29	11.97	12.23	12.92	14.14
	8H	16.17	16.83	17.13	17.79	19.01	11.38	12.03	12.33	12.99	14.21
	12H	16.23	16.85	17.19	17.81	19.06	11.42	12.04	12.38	12.99	14.24
4H	2H	13.38	14.12	14.32	15.06	16.28	9.93	10.67	10.87	11.61	12.83
	3H	15.20	15.82	16.15	16.79	18.02	11.28	11.90	12.23	12.86	14.09
	4H	15.89	16.45	16.85	17.42	18.67	11.82	12.39	12.78	13.35	14.60
	6H	16.40	16.88	17.37	17.87	19.12	12.24	12.72	13.21	13.71	14.96
	8H	16.57	17.02	17.54	18.00	19.27	12.36	12.82	13.34	13.80	15.06
	12H	16.66	17.07	17.65	18.07	19.34	12.43	12.84	13.42	13.83	15.11
8H	4H	15.86	16.31	16.83	17.29	18.56	12.10	12.55	13.07	13.53	14.80
	6H	16.42	16.79	17.42	17.81	19.08	12.61	12.99	13.61	14.01	15.27
	8H	16.63	16.96	17.64	17.97	19.25	12.80	13.13	13.81	14.14	15.42
	12H	16.76	17.05	17.77	18.05	19.39	12.92	13.21	13.93	14.21	15.54
12H	4H	15.81	16.22	16.81	17.22	18.49	12.11	12.52	13.10	13.51	14.78
	6H	16.39	16.72	17.40	17.73	19.02	12.66	12.99	13.67	14.00	15.28
	8H	16.61	16.90	17.62	17.90	19.23	12.87	13.16	13.88	14.16	15.49