

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915275

Luminaire Tested: DFN2DIP-TR3F0-030D030US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915275
REPORT IS A COMBINATION OF REPORTS P901792 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-030D030US927-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4372.8 lumens
Efficiency: N/A
Efficacy: 93.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 46.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915275

CATALOG NUMBER: DFN2DIP-TR3F0-030D030US927-RLLONL

Luminous Intensity Polar Plot

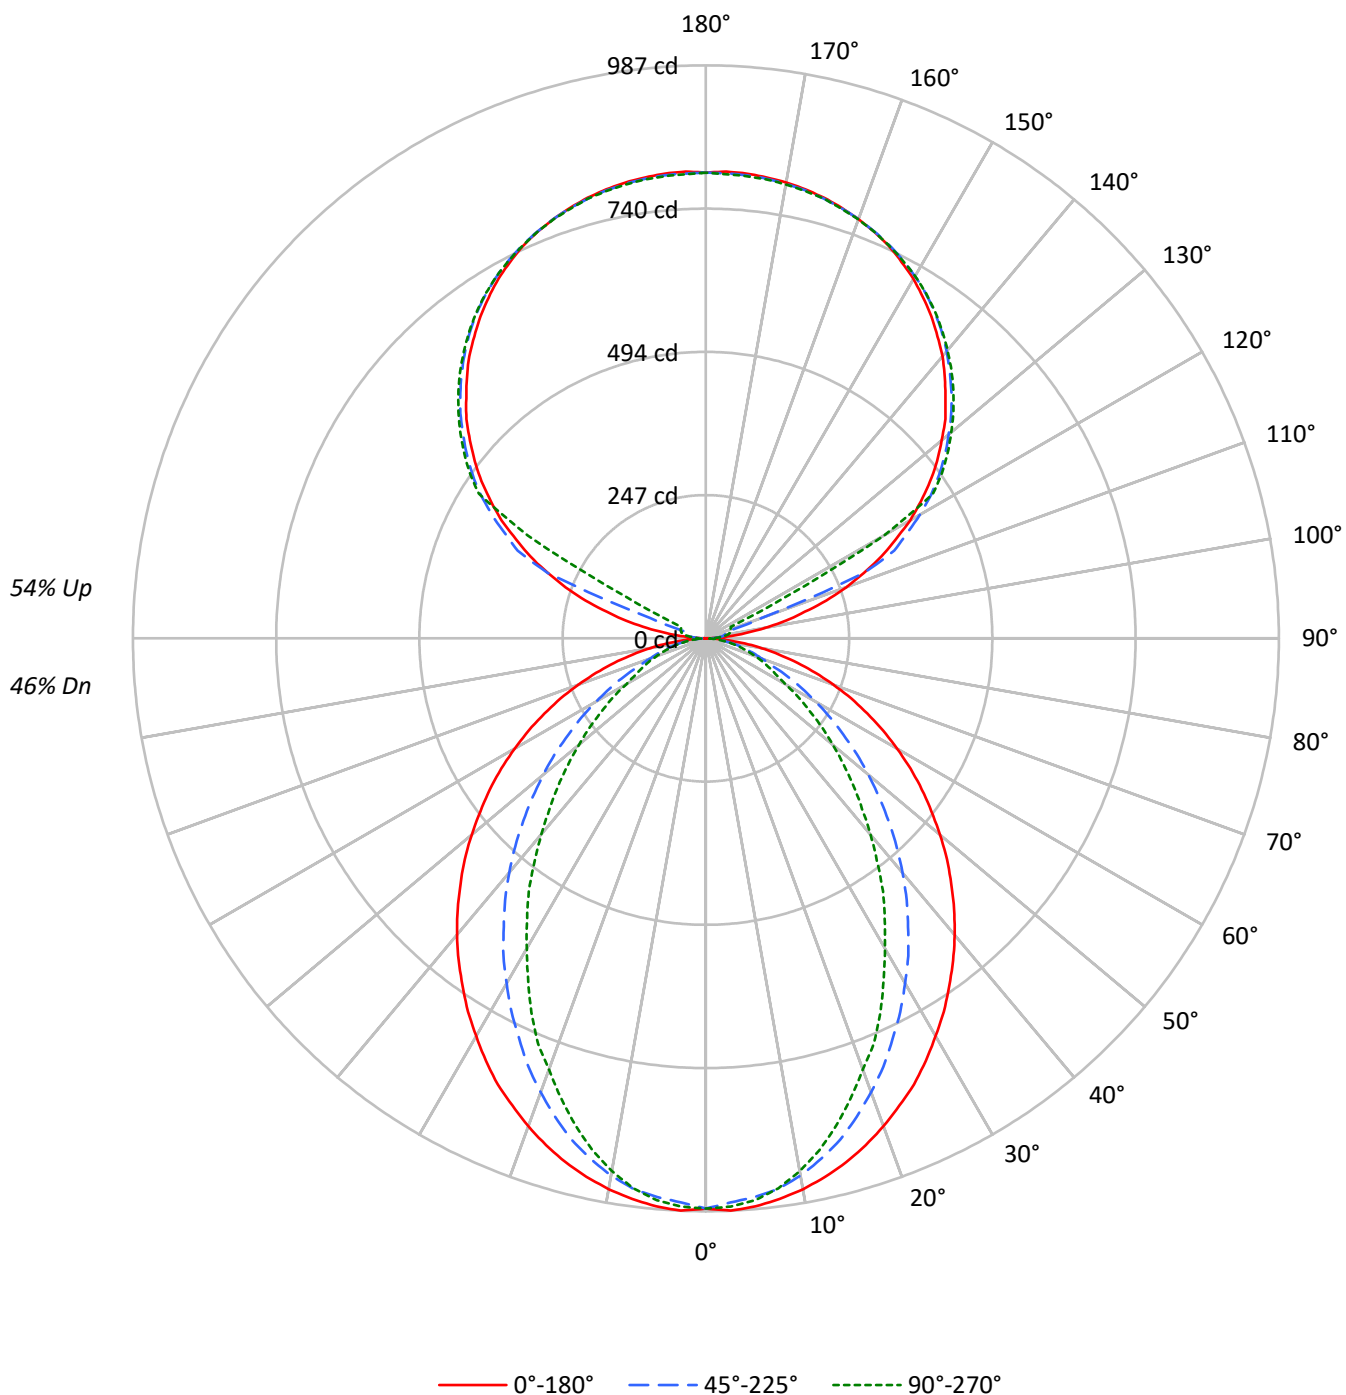

TEST NUMBER: P915275

CATALOG NUMBER: DFN2DIP-TR3F0-030D030US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1224	1224	1224
5°	1225	1204	1211
10°	1212	1179	1171
15°	1195	1139	1110
20°	1172	1084	1034
25°	1149	1023	961
30°	1118	961	869
35°	1087	893	788
40°	1056	824	696
45°	1020	747	612
50°	983	670	530
55°	944	587	452
60°	899	501	371
65°	847	413	333
70°	784	332	300
75°	704	290	271
80°	590	240	232
85°	401	156	170

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1020 cd/sqm

TEST NUMBER: P915275

CATALOG NUMBER: DFN2DIP-TR3F0-030D030US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.1	2.1
10°-20°	252.7	5.8
20°-30°	354.8	8.1
30°-40°	386.8	8.8
40°-50°	355.5	8.1
50°-60°	279.2	6.4
60°-70°	181.7	4.2
70°-80°	93.5	2.1
80°-90°	25.3	0.6
90°-100°	26.5	0.6
100°-110°	98.6	2.3
110°-120°	261.5	6.0
120°-130°	433.7	9.9
130°-140°	460.7	10.5
140°-150°	428.1	9.8
150°-160°	344.2	7.9
160°-170°	221.8	5.1
170°-180°	76.3	1.7
0°-30°	699.6	16.0
0°-40°	1086.3	24.8
0°-60°	1720.9	39.4
0°-90°	2021.5	46.2
90°-120°	386.5	8.8
90°-150°	1709.0	39.1
90°-180°	2351.0	53.8
0°-180°	4372.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	982	982	982	982	982	
5°	982	978	966	974	972	93
15°	934	924	894	877	868	263
25°	848	820	761	724	711	390
35°	731	685	607	551	532	457
45°	597	538	444	381	360	461
55°	454	385	289	236	219	406
65°	307	235	155	124	122	304
75°	164	101	71	65	64	173
85°	38	20	17	17	17	44
90°	1	7	12	15	16	4
95°	38	18	23	26	25	45
105°	176	194	35	42	44	188
115°	334	344	358	89	48	329
125°	472	479	490	494	496	421
135°	584	593	598	604	603	451
145°	677	677	687	691	688	424
155°	746	741	748	751	746	344
165°	786	782	784	788	784	222
175°	804	800	801	805	799	76
180°	802	802	802	802	802	

TEST NUMBER: P915275

CATALOG NUMBER: DFN2DIP-TR3F0-030D030US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	982.2	982.2	982.2	982.2	982.2
2.5°	986.7	982.2	972.4	981.4	979.6
5°	982.2	977.8	966.2	974.2	971.5
7.5°	974.2	968.9	956.5	960.0	955.5
10°	963.5	957.4	939.6	936.8	931.6
12.5°	950.2	942.2	918.2	912.9	903.1
15°	934.2	924.4	894.2	877.3	868.5
17.5°	915.5	901.3	864.0	844.5	830.2
20°	894.2	876.4	831.9	809.8	790.2
22.5°	871.2	850.6	799.1	768.9	755.6
25°	848.0	819.5	760.9	724.4	711.1
27.5°	820.5	790.2	725.3	683.6	663.1
30°	791.2	757.3	686.2	641.0	616.9
32.5°	762.6	721.8	649.0	595.6	573.3
35°	730.7	685.3	607.1	551.1	531.6
37.5°	699.6	650.6	568.0	506.6	484.5
40°	666.7	613.4	527.1	464.0	440.9
42.5°	632.9	576.1	486.2	420.4	398.2
45°	597.4	537.7	444.5	381.3	360.0
47.5°	563.6	500.5	404.5	341.3	321.8
50°	526.2	463.1	365.4	304.0	285.3
52.5°	489.7	423.1	328.0	269.3	252.5
55°	454.2	384.8	288.8	235.6	218.7
57.5°	417.8	346.7	254.3	204.5	190.2
60°	380.4	309.3	217.8	172.5	158.3
62.5°	344.0	272.9	186.6	144.0	137.0
65°	306.7	234.6	154.6	124.5	121.8
67.5°	271.2	199.1	124.5	109.3	106.6
70°	233.8	164.5	103.1	94.2	90.6
72.5°	198.2	132.4	86.2	79.1	77.3
75°	163.5	101.3	71.1	64.9	64.0
77.5°	128.9	71.9	56.0	52.4	50.6
80°	96.9	51.6	42.6	39.1	39.1
82.5°	67.5	34.7	29.3	27.6	27.6
85°	38.2	19.5	16.9	16.9	16.9
87.5°	14.3	7.1	7.1	6.3	6.3
90°	0.6	7.0	11.6	14.6	15.6
92.5°	14.6	12.2	13.9	15.1	15.6
95°	37.7	18.5	22.6	25.6	25.0
97.5°	67.9	20.4	29.5	31.4	31.9
100°	102.7	23.2	33.1	37.7	38.9
102.5°	141.0	139.9	34.2	40.6	42.4
105°	176.4	193.8	35.4	41.7	44.1
107.5°	217.6	232.1	36.6	42.9	45.3
110°	257.1	269.3	101.6	43.6	45.9

TEST NUMBER: P915275

CATALOG NUMBER: DFN2DIP-TR3F0-030D030US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	294.3	304.7	294.8	44.7	46.4
115°	333.7	343.6	358.1	89.4	47.6
117.5°	368.0	379.5	389.4	306.4	154.4
120°	406.2	414.9	425.4	432.4	354.0
122.5°	438.7	448.1	459.7	463.1	463.7
125°	471.8	479.3	490.4	494.5	496.2
127.5°	502.0	510.1	518.9	524.7	525.2
130°	530.4	539.8	546.1	552.5	552.0
132.5°	559.4	567.0	573.4	578.6	578.1
135°	583.8	593.2	598.3	604.2	603.0
137.5°	609.3	616.3	622.2	628.0	626.2
140°	634.3	639.0	645.3	650.5	647.7
142.5°	655.3	659.3	666.9	671.5	668.6
145°	677.3	676.7	686.6	690.6	687.7
147.5°	696.4	694.7	704.6	707.4	705.1
150°	715.0	711.0	720.3	723.7	720.8
152.5°	730.6	726.0	734.7	738.2	734.2
155°	745.8	740.6	747.5	751.0	746.4
157.5°	758.0	753.4	758.6	762.6	758.0
160°	768.4	764.9	768.4	771.9	767.8
162.5°	777.7	774.2	777.1	781.2	775.9
165°	785.8	782.4	784.1	788.1	784.1
167.5°	792.2	788.7	790.4	794.6	789.3
170°	797.4	793.9	795.1	799.2	793.9
172.5°	800.9	797.4	798.6	802.6	797.4
175°	803.7	799.7	800.9	804.9	799.2
177.5°	804.9	800.9	801.5	805.6	800.3
180°	802.1	802.1	802.1	802.1	802.1

TEST NUMBER: P915275

CATALOG NUMBER: DFN2DIP-TR3F0-030D030US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.43	8.24	8.43	9.24	10.56	3.41	4.21	4.41	5.21	6.54
	3H	9.10	9.82	10.11	10.83	12.18	4.59	5.31	5.60	6.32	7.67
	4H	9.70	10.38	10.72	11.39	12.75	5.04	5.71	6.06	6.73	8.08
	6H	10.11	10.74	11.14	11.76	13.12	5.35	5.97	6.38	6.99	8.36
	8H	10.24	10.83	11.27	11.86	13.23	5.44	6.03	6.47	7.07	8.43
	12H	10.29	10.85	11.33	11.88	13.27	5.48	6.04	6.52	7.07	8.46
4H	2H	7.45	8.12	8.47	9.14	10.49	4.00	4.67	5.02	5.69	7.05
	3H	9.26	9.83	10.30	10.87	12.24	5.34	5.90	6.37	6.94	8.31
	4H	9.95	10.46	10.99	11.50	12.89	5.88	6.39	6.92	7.43	8.82
	6H	10.45	10.89	11.50	11.95	13.34	6.29	6.73	7.34	7.79	9.18
	8H	10.62	11.03	11.67	12.08	13.49	6.42	6.83	7.47	7.88	9.28
	12H	10.71	11.08	11.78	12.15	13.55	6.48	6.85	7.55	7.91	9.32
8H	4H	9.91	10.32	10.96	11.37	12.78	6.15	6.56	7.20	7.62	9.02
	6H	10.47	10.81	11.54	11.90	13.30	6.66	7.00	7.73	8.09	9.49
	8H	10.68	10.98	11.76	12.05	13.47	6.85	7.15	7.93	8.22	9.64
	12H	10.81	11.07	11.89	12.14	13.60	6.96	7.22	8.05	8.30	9.76
12H	4H	9.86	10.23	10.93	11.30	12.71	6.15	6.53	7.22	7.59	9.00
	6H	10.44	10.74	11.52	11.82	13.24	6.71	7.01	7.79	8.08	9.50
	8H	10.65	10.92	11.74	11.99	13.45	6.91	7.18	8.00	8.25	9.71