

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915305

Luminaire Tested: DFN2DIP-TR3F0-040D040US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915305
REPORT IS A COMBINATION OF REPORTS P901808 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-040D040US927-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5830.4 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 64.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915305

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US927-RLLONL

Luminous Intensity Polar Plot

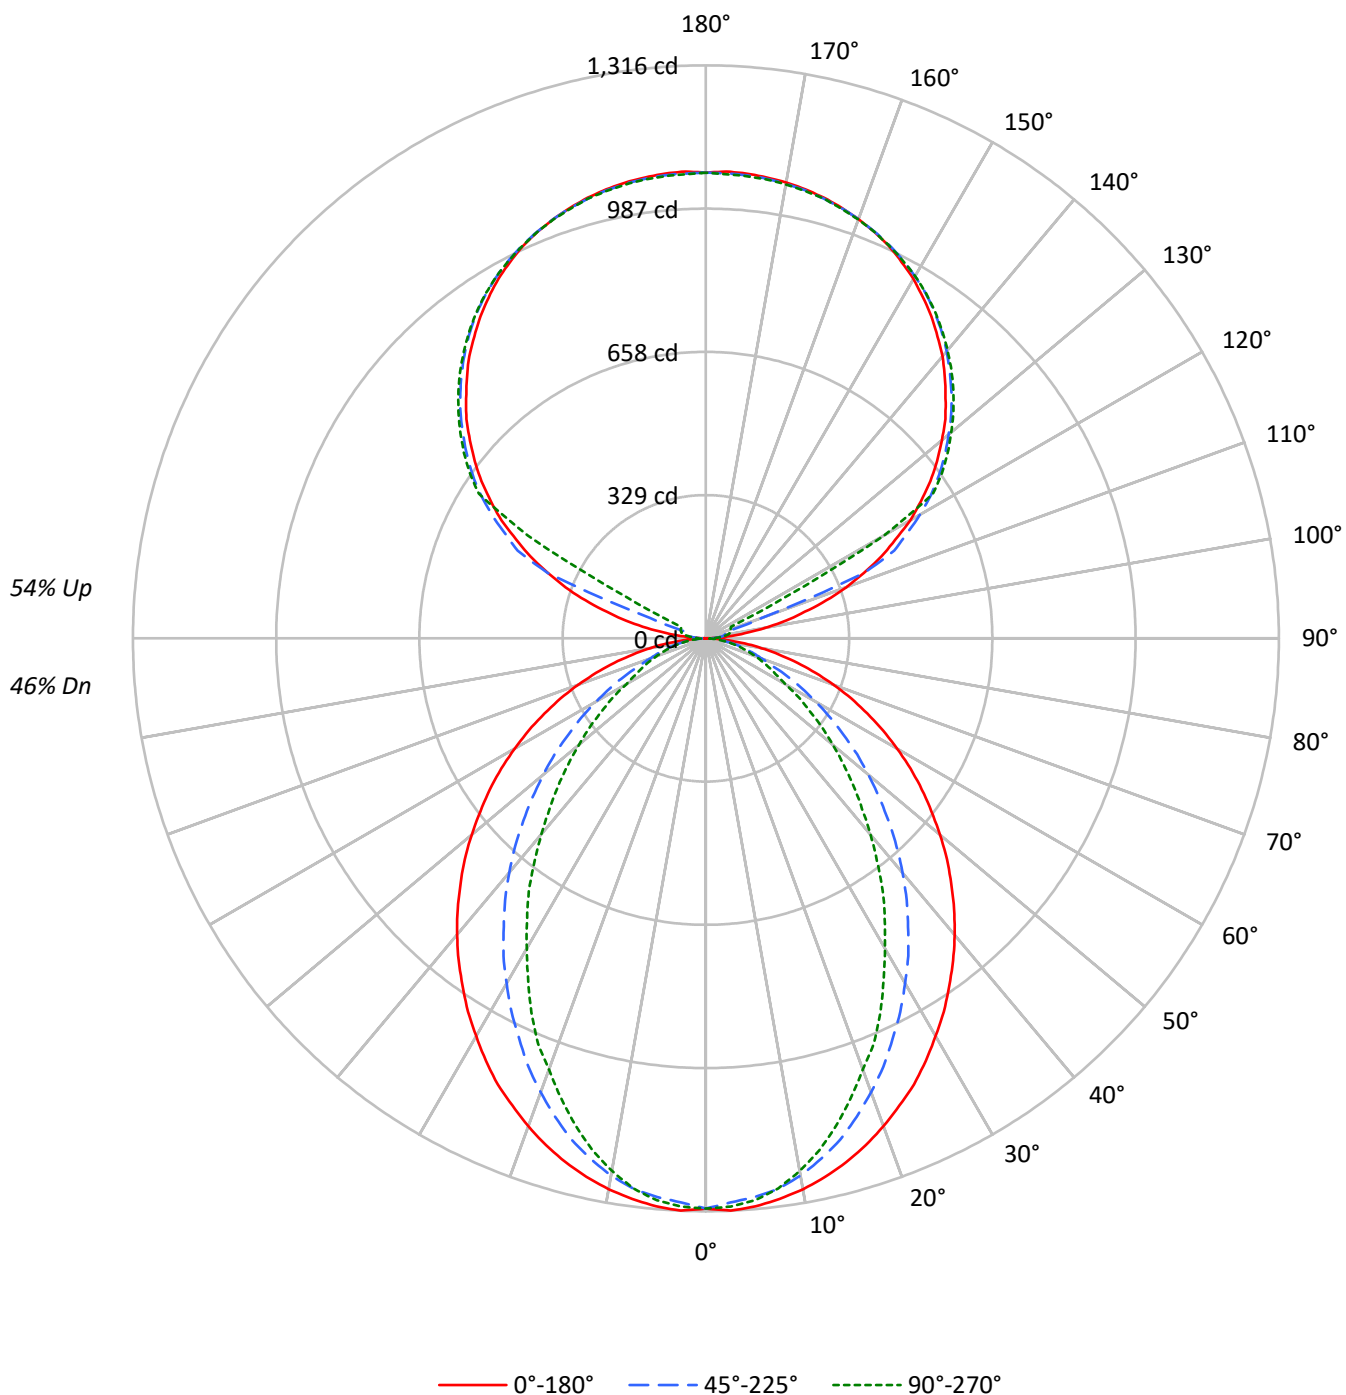

TEST NUMBER: P915305

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1632	1632	1632
5°	1634	1605	1615
10°	1617	1572	1562
15°	1593	1519	1479
20°	1563	1446	1379
25°	1532	1364	1282
30°	1491	1281	1159
35°	1450	1191	1051
40°	1409	1099	928
45°	1361	996	816
50°	1311	893	707
55°	1259	783	602
60°	1198	668	495
65°	1129	551	444
70°	1045	442	400
75°	939	387	362
80°	785	320	310
85°	534	207	227

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1361 cd/sqm

TEST NUMBER: P915305

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US927-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	2.1
10°-20°	336.9	5.8
20°-30°	473.1	8.1
30°-40°	515.7	8.8
40°-50°	473.9	8.1
50°-60°	372.2	6.4
60°-70°	242.3	4.2
70°-80°	124.7	2.1
80°-90°	33.7	0.6
90°-100°	35.2	0.6
100°-110°	131.5	2.3
110°-120°	348.6	6.0
120°-130°	578.2	9.9
130°-140°	614.2	10.5
140°-150°	570.9	9.8
150°-160°	458.9	7.9
160°-170°	295.7	5.1
170°-180°	101.8	1.7
0°-30°	932.7	16.0
0°-40°	1448.4	24.8
0°-60°	2294.6	39.4
0°-90°	2695.3	46.2
90°-120°	515.3	8.8
90°-150°	2278.7	39.1
90°-180°	3135.0	53.8
0°-180°	5830.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	9	15	19	21	5
95°	50	25	30	34	33	60
105°	235	258	47	56	59	251
115°	445	458	477	119	64	438
125°	629	639	654	659	662	561
135°	778	791	798	806	804	601
145°	903	902	915	921	917	565
155°	994	988	997	1001	995	458
165°	1048	1043	1045	1051	1045	296
175°	1072	1066	1068	1073	1066	102
180°	1069	1069	1069	1069	1069	

TEST NUMBER: P915305

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US927-RLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	0.7	9.3	15.4	19.4	20.8
92.5°	19.4	16.2	18.5	20.1	20.8
95°	50.2	24.7	30.1	34.1	33.3
97.5°	90.5	27.1	39.5	41.8	42.5
100°	137.0	31.0	44.1	50.2	51.8
102.5°	188.0	186.6	45.6	54.1	56.5
105°	235.2	258.5	47.2	55.7	58.8
107.5°	290.2	309.5	48.8	57.3	60.4
110°	342.9	359.0	135.5	58.1	61.1



TEST NUMBER: P915305

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	392.4	406.2	393.1	59.6	61.9
115°	444.9	458.0	477.4	119.1	63.5
117.5°	490.6	506.0	519.3	408.5	205.8
120°	541.7	553.3	567.2	576.5	472.1
122.5°	584.9	597.4	612.9	617.5	618.3
125°	629.1	639.2	653.9	659.3	661.6
127.5°	669.3	680.2	691.8	699.6	700.3
130°	707.3	719.7	728.1	736.6	735.9
132.5°	745.9	756.1	764.5	771.5	770.8
135°	778.5	790.9	797.8	805.6	804.1
137.5°	812.5	821.7	829.6	837.3	835.0
140°	845.7	852.0	860.5	867.4	863.6
142.5°	873.7	879.1	889.1	895.2	891.4
145°	903.1	902.3	915.4	920.8	916.9
147.5°	928.5	926.2	939.4	943.3	940.2
150°	953.3	947.9	960.4	965.0	961.1
152.5°	974.2	968.0	979.6	984.3	978.9
155°	994.3	987.5	996.7	1001.3	995.1
157.5°	1010.6	1004.4	1011.5	1016.8	1010.6
160°	1024.5	1019.9	1024.5	1029.1	1023.7
162.5°	1036.9	1032.3	1036.2	1041.6	1034.6
165°	1047.7	1043.1	1045.4	1050.8	1045.4
167.5°	1056.3	1051.5	1054.0	1059.4	1052.4
170°	1063.3	1058.6	1060.1	1065.6	1058.6
172.5°	1067.9	1063.3	1064.8	1070.2	1063.3
175°	1071.7	1066.3	1067.9	1073.2	1065.6
177.5°	1073.2	1067.9	1068.7	1074.1	1067.1
180°	1069.4	1069.4	1069.4	1069.4	1069.4

TEST NUMBER: P915305

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.43	9.23	9.43	10.24	11.56	4.41	5.21	5.41	6.21	7.54
	3H	10.10	10.82	11.11	11.83	13.17	5.59	6.31	6.60	7.32	8.67
	4H	10.70	11.38	11.72	12.39	13.75	6.04	6.71	7.06	7.73	9.08
	6H	11.11	11.74	12.14	12.76	14.12	6.35	6.97	7.38	7.99	9.36
	8H	11.23	11.83	12.27	12.86	14.23	6.44	7.03	7.47	8.07	9.43
	12H	11.29	11.85	12.33	12.88	14.27	6.48	7.04	7.52	8.07	9.46
4H	2H	8.45	9.12	9.47	10.14	11.49	5.00	5.67	6.02	6.69	8.04
	3H	10.26	10.83	11.30	11.87	13.24	6.34	6.90	7.37	7.94	9.31
	4H	10.95	11.46	11.99	12.50	13.89	6.88	7.39	7.92	8.43	9.82
	6H	11.45	11.89	12.50	12.95	14.34	7.29	7.73	8.34	8.79	10.18
	8H	11.62	12.03	12.67	13.08	14.49	7.42	7.83	8.47	8.88	10.28
	12H	11.71	12.08	12.78	13.15	14.55	7.48	7.85	8.55	8.91	10.32
8H	4H	10.91	11.32	11.96	12.37	13.78	7.15	7.56	8.20	8.62	10.02
	6H	11.47	11.81	12.54	12.90	14.30	7.66	8.00	8.74	9.09	10.49
	8H	11.68	11.98	12.76	13.05	14.47	7.85	8.15	8.93	9.22	10.64
	12H	11.81	12.07	12.89	13.14	14.60	7.96	8.22	9.04	9.30	10.76
12H	4H	10.86	11.23	11.93	12.30	13.71	7.15	7.53	8.22	8.59	10.00
	6H	11.44	11.74	12.52	12.82	14.24	7.71	8.01	8.79	9.08	10.50
	8H	11.65	11.92	12.74	12.99	14.45	7.91	8.17	9.00	9.25	10.71