

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915315

Luminaire Tested: DFN2DIP-TR3F0-040D070US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915315
REPORT IS A COMBINATION OF REPORTS P901849 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-040D070US927-FLLONL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8626.8 lumens
Efficiency: N/A
Efficacy: 97.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 88.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915315
CATALOG NUMBER: DFN2DIP-TR3F0-040D070US927-FLLONL

Luminous Intensity Polar Plot

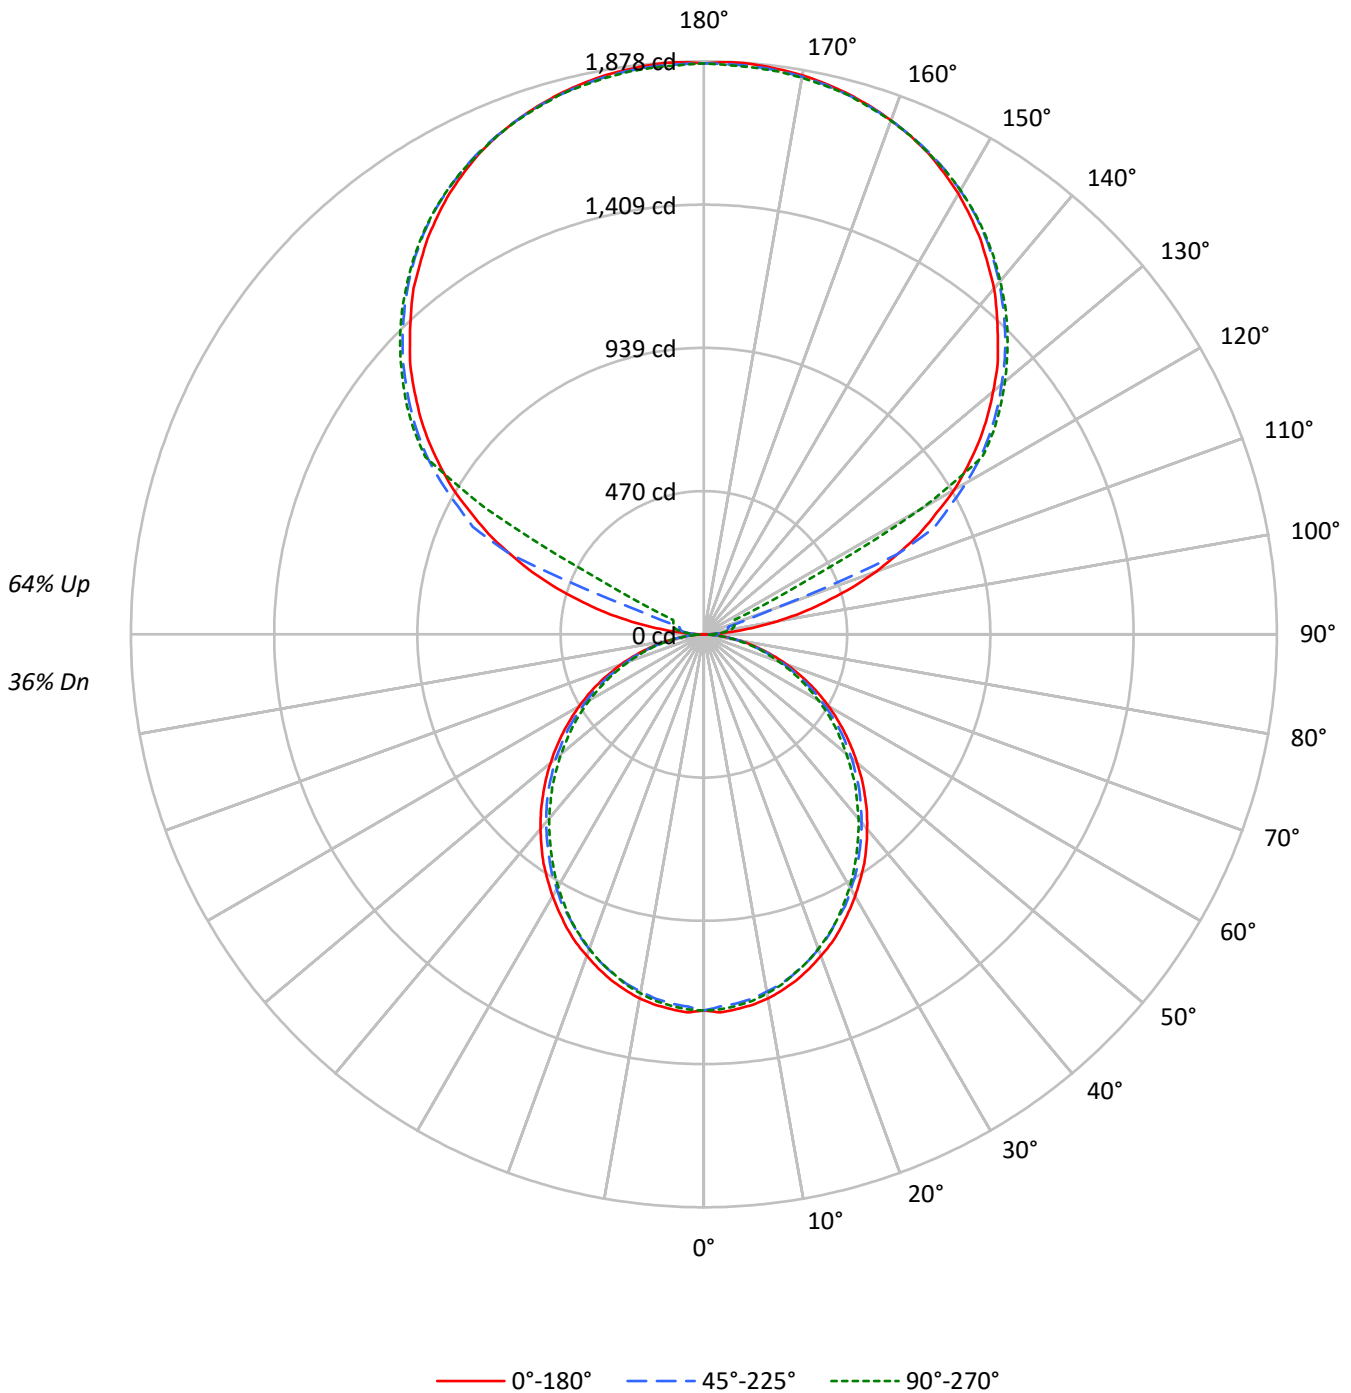



TEST NUMBER: P915315
 CATALOG NUMBER: DFN2DIP-TR3F0-040D070US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36				36
1	95	90	87	83	86	82	79	76	66	64	62	52	50	49	39	38	37	31				31
2	86	79	73	68	78	72	67	62	58	54	51	46	43	41	34	32	31	26				26
3	79	69	62	57	71	63	57	52	51	47	43	40	37	35	30	28	26	22				22
4	72	61	54	48	65	56	49	44	45	41	37	36	32	30	27	25	23	19				19
5	66	55	47	41	59	50	43	38	41	35	32	32	28	26	24	22	20	16				16
6	61	49	41	35	55	45	38	33	37	31	27	29	25	22	22	19	17	14				14
7	56	44	36	31	51	40	33	29	33	28	24	26	23	20	20	17	15	13				13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	18	16	14	11				11
9	48	36	29	24	44	33	27	22	28	23	19	22	18	16	17	14	12	10				10
10	45	33	26	21	41	31	24	20	25	20	17	20	17	14	16	13	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1536	1536	1536
5°	1538	1514	1524
10°	1525	1492	1503
15°	1501	1466	1469
20°	1470	1431	1435
25°	1439	1389	1396
30°	1401	1349	1347
35°	1364	1303	1294
40°	1319	1256	1244
45°	1274	1210	1193
50°	1225	1161	1134
55°	1173	1104	1080
60°	1115	1036	1017
65°	1051	966	944
70°	970	881	864
75°	858	778	789
80°	722	647	648
85°	510	427	418

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1274 cd/sqm



TEST NUMBER: P915315

CATALOG NUMBER: DFN2DIP-TR3F0-040D070US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	1.3
10°-20°	326.5	3.8
20°-30°	479.8	5.6
30°-40°	557.3	6.5
40°-50°	556.6	6.5
50°-60°	485.3	5.6
60°-70°	358.8	4.2
70°-80°	203.0	2.4
80°-90°	56.9	0.7
90°-100°	61.7	0.7
100°-110°	230.0	2.7
110°-120°	610.1	7.1
120°-130°	1011.9	11.7
130°-140°	1074.9	12.5
140°-150°	999.0	11.6
150°-160°	803.2	9.3
160°-170°	517.5	6.0
170°-180°	178.1	2.1
0°-30°	922.4	10.7
0°-40°	1479.7	17.2
0°-60°	2521.7	29.2
0°-90°	3140.3	36.4
90°-120°	901.9	10.5
90°-150°	3987.7	46.2
90°-180°	5487.0	63.6
0°-180°	8626.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	16	27	34	36	8
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	



TEST NUMBER: P915315

CATALOG NUMBER: DFN2DIP-TR3F0-040D070US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9



TEST NUMBER: P915315

CATALOG NUMBER: DFN2DIP-TR3F0-040D070US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4



TEST NUMBER: P915315
 CATALOG NUMBER: DFN2DIP-TR3F0-040D070US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.31	8.06	8.37	9.12	10.58	6.88	7.63	7.94	8.70	10.15
	3H	8.95	9.62	10.02	10.70	12.17	8.48	9.15	9.56	10.23	11.70
	4H	9.52	10.16	10.61	11.24	12.72	9.06	9.70	10.14	10.77	12.25
	6H	9.91	10.50	11.01	11.58	13.07	9.44	10.03	10.54	11.11	12.60
	8H	10.01	10.57	11.11	11.67	13.15	9.54	10.10	10.64	11.20	12.68
	12H	10.05	10.58	11.15	11.67	13.18	9.58	10.11	10.68	11.20	12.71
4H	2H	7.75	8.39	8.84	9.47	10.94	7.41	8.05	8.50	9.12	10.60
	3H	9.60	10.13	10.70	11.23	12.72	9.21	9.74	10.31	10.84	12.33
	4H	10.30	10.79	11.40	11.88	13.39	9.90	10.39	11.00	11.48	12.99
	6H	10.80	11.22	11.91	12.34	13.84	10.39	10.81	11.51	11.93	13.44
	8H	10.94	11.33	12.05	12.44	13.96	10.53	10.93	11.65	12.04	13.56
	12H	11.00	11.36	12.13	12.48	14.01	10.59	10.94	11.72	12.07	13.59
8H	4H	10.48	10.87	11.59	11.98	13.50	10.12	10.52	11.24	11.63	13.15
	6H	11.10	11.42	12.23	12.57	14.09	10.74	11.06	11.87	12.21	13.73
	8H	11.31	11.59	12.45	12.73	14.26	10.95	11.23	12.09	12.36	13.90
	12H	11.43	11.68	12.57	12.81	14.38	11.05	11.30	12.20	12.43	14.00
12H	4H	10.46	10.82	11.59	11.94	13.46	10.11	10.47	11.24	11.59	13.11
	6H	11.12	11.41	12.26	12.54	14.08	10.78	11.06	11.92	12.19	13.73
	8H	11.35	11.60	12.50	12.73	14.31	11.00	11.25	12.15	12.38	13.95