

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915383

Luminaire Tested: DFN2DIP-TR3F0-070D040US927-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915383
REPORT IS A COMBINATION OF REPORTS P901814 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D040US927-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7850.5 lumens
Efficiency: N/A
Efficacy: 78.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 99.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915383

CATALOG NUMBER: DFN2DIP-TR3F0-070D040US927-RLLONL

Luminous Intensity Polar Plot

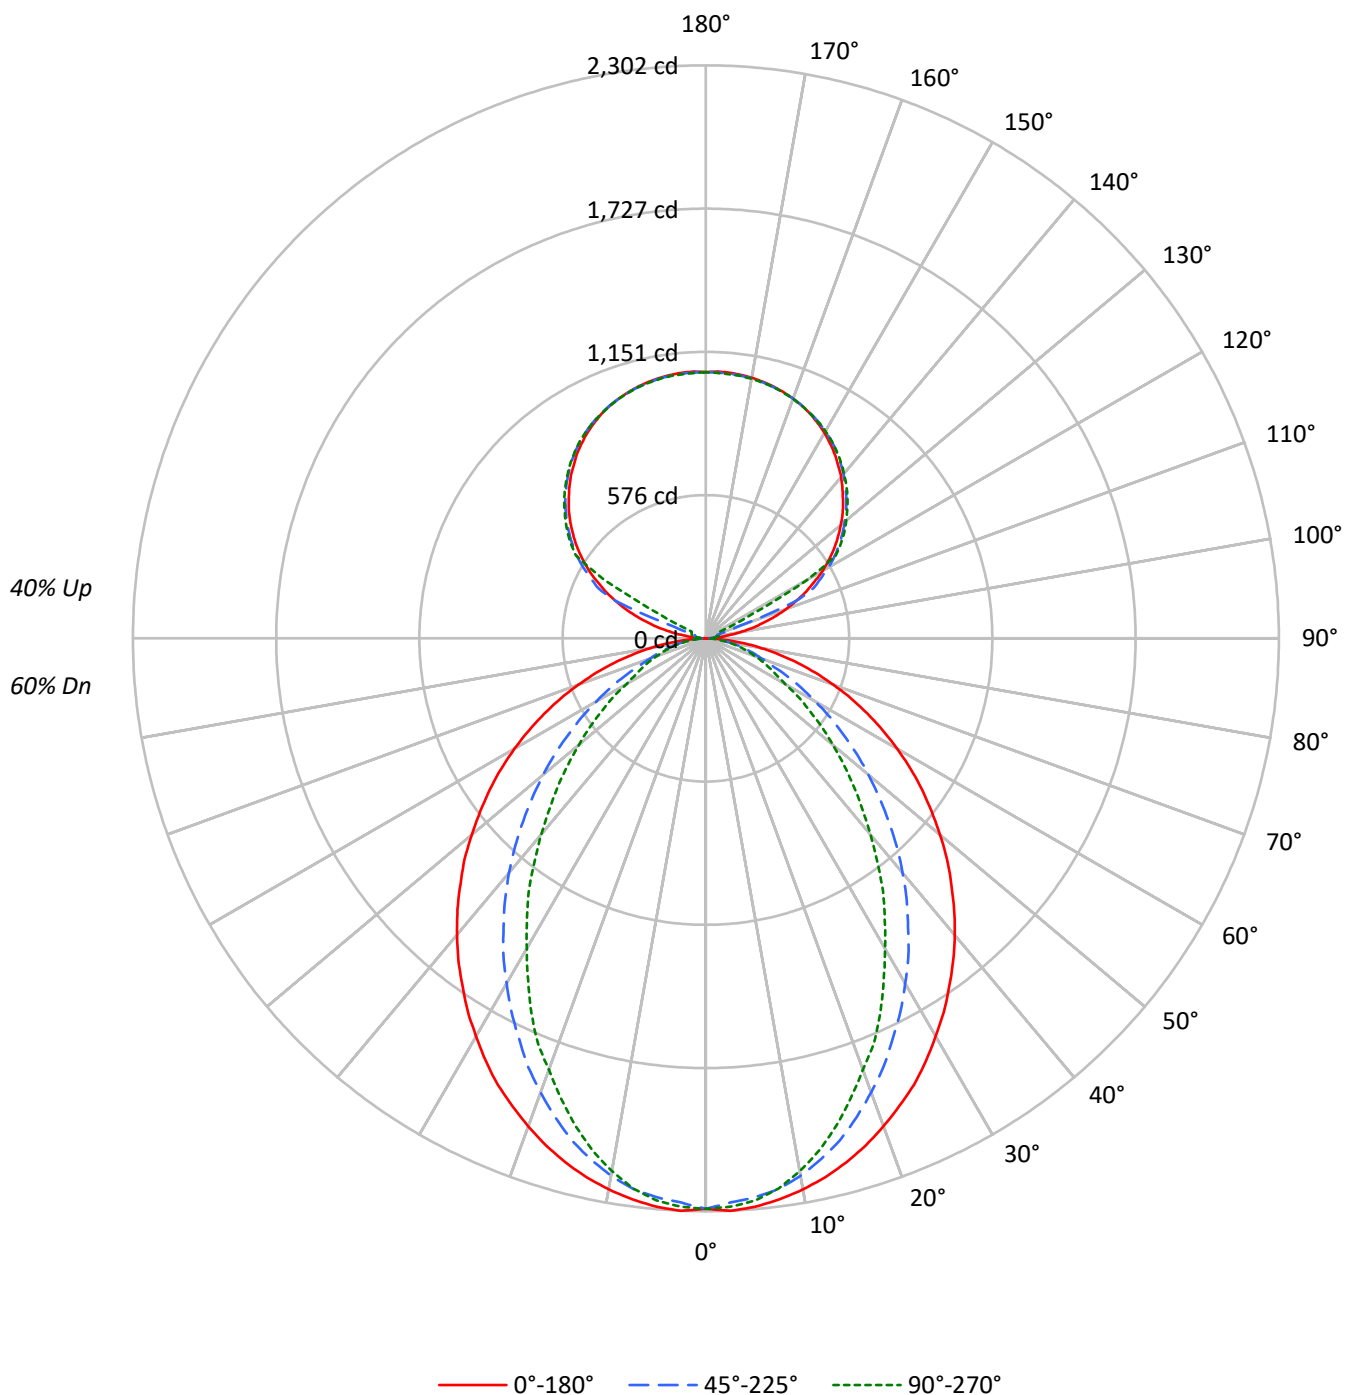

TEST NUMBER: P915383

CATALOG NUMBER: DFN2DIP-TR3F0-070D040US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89		77	77	77		65
1	101	96	93	89	94	90	87	84	79	77	74		68	67	65		59
2	92	85	79	74	86	80	74	70	70	66	62		61	58	55		52
3	84	75	68	62	79	71	64	59	62	57	53		54	51	47		47
4	78	67	59	53	72	63	56	51	56	50	46		49	45	41		42
5	71	60	52	46	67	57	49	44	50	44	40		44	40	36		38
6	66	54	46	40	62	51	44	39	45	40	35		40	35	32		35
7	61	49	41	36	57	46	39	34	41	36	31		37	32	29		32
8	57	45	37	32	53	42	35	31	38	32	28		34	29	26		30
9	53	41	34	29	50	39	32	28	35	29	25		31	27	23		28
10	50	38	31	26	47	36	29	25	32	27	23		29	24	21		26

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2856	2856	2856
5°	2859	2808	2827
10°	2829	2751	2733
15°	2788	2657	2589
20°	2735	2530	2413
25°	2681	2387	2243
30°	2608	2241	2028
35°	2537	2085	1840
40°	2465	1923	1624
45°	2381	1744	1428
50°	2294	1563	1237
55°	2203	1370	1054
60°	2097	1169	865
65°	1976	964	777
70°	1828	774	700
75°	1643	677	633
80°	1375	561	543
85°	935	363	397

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2381 cd/sqm

TEST NUMBER: P915383

CATALOG NUMBER: DFN2DIP-TR3F0-070D040US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	2.7
10°-20°	589.7	7.5
20°-30°	827.9	10.5
30°-40°	902.4	11.5
40°-50°	829.4	10.6
50°-60°	651.4	8.3
60°-70°	424.0	5.4
70°-80°	218.2	2.8
80°-90°	57.6	0.7
90°-100°	35.2	0.4
100°-110°	131.5	1.7
110°-120°	348.6	4.4
120°-130°	578.2	7.4
130°-140°	614.2	7.8
140°-150°	570.9	7.3
150°-160°	458.9	5.8
160°-170°	295.7	3.8
170°-180°	101.8	1.3
0°-30°	1632.3	20.8
0°-40°	2534.7	32.3
0°-60°	4015.5	51.2
0°-90°	4715.3	60.1
90°-120°	515.3	6.6
90°-150°	2278.7	29.0
90°-180°	3135.0	39.9
0°-180°	7850.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2282	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	1	9	15	19	21	7
95°	50	25	30	34	33	60
105°	235	258	47	56	59	251
115°	445	458	477	119	64	438
125°	629	639	654	659	662	561
135°	778	791	798	806	804	601
145°	903	902	915	921	917	565
155°	994	988	997	1001	995	458
165°	1048	1043	1045	1051	1045	296
175°	1072	1066	1068	1073	1066	102
180°	1069	1069	1069	1069	1069	

TEST NUMBER: P915383

CATALOG NUMBER: DFN2DIP-TR3F0-070D040US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2291.9	2291.9	2291.9	2291.9	2291.9
2.5°	2302.2	2291.9	2269.0	2289.9	2285.7
5°	2291.9	2281.5	2254.5	2273.2	2267.0
7.5°	2273.2	2260.8	2231.8	2239.9	2229.6
10°	2248.3	2233.8	2192.4	2186.0	2173.7
12.5°	2217.2	2198.5	2142.5	2130.1	2107.2
15°	2179.8	2157.0	2086.5	2047.2	2026.5
17.5°	2136.3	2103.1	2015.9	1970.3	1937.1
20°	2086.5	2044.9	1941.3	1889.6	1843.8
22.5°	2032.7	1984.9	1864.5	1794.1	1763.1
25°	1978.7	1912.2	1775.4	1690.4	1659.2
27.5°	1914.5	1843.8	1692.4	1595.0	1547.2
30°	1846.0	1767.0	1601.1	1495.5	1439.4
32.5°	1779.6	1684.1	1514.2	1389.6	1337.7
35°	1704.9	1599.1	1416.7	1286.0	1240.2
37.5°	1632.4	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.9	1082.7	1028.7
42.5°	1476.8	1344.1	1134.6	981.0	929.3
45°	1393.8	1254.7	1037.1	889.7	839.9
47.5°	1315.0	1167.8	943.8	796.4	750.8
50°	1227.9	1080.7	852.5	709.2	665.9
52.5°	1142.7	987.1	765.3	628.4	589.1
55°	1059.8	898.0	674.0	549.7	510.3
57.5°	974.9	808.9	593.3	477.1	443.9
60°	887.7	721.8	508.1	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.6	547.5	360.9	290.5	284.1
67.5°	632.6	464.5	290.5	255.0	248.9
70°	545.5	383.7	240.5	219.8	211.4
72.5°	462.6	309.0	201.1	184.7	180.5
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.7	122.3	118.2
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.1	45.6	39.4	39.4	39.4
87.5°	33.2	16.5	16.5	14.5	14.5
90°	0.7	9.3	15.4	19.4	20.8
92.5°	19.4	16.2	18.5	20.1	20.8
95°	50.2	24.7	30.1	34.1	33.3
97.5°	90.5	27.1	39.5	41.8	42.5
100°	137.0	31.0	44.1	50.2	51.8
102.5°	188.0	186.6	45.6	54.1	56.5
105°	235.2	258.5	47.2	55.7	58.8
107.5°	290.2	309.5	48.8	57.3	60.4
110°	342.9	359.0	135.5	58.1	61.1



TEST NUMBER: P915383

CATALOG NUMBER: DFN2DIP-TR3F0-070D040US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	392.4	406.2	393.1	59.6	61.9
115°	444.9	458.0	477.4	119.1	63.5
117.5°	490.6	506.0	519.3	408.5	205.8
120°	541.7	553.3	567.2	576.5	472.1
122.5°	584.9	597.4	612.9	617.5	618.3
125°	629.1	639.2	653.9	659.3	661.6
127.5°	669.3	680.2	691.8	699.6	700.3
130°	707.3	719.7	728.1	736.6	735.9
132.5°	745.9	756.1	764.5	771.5	770.8
135°	778.5	790.9	797.8	805.6	804.1
137.5°	812.5	821.7	829.6	837.3	835.0
140°	845.7	852.0	860.5	867.4	863.6
142.5°	873.7	879.1	889.1	895.2	891.4
145°	903.1	902.3	915.4	920.8	916.9
147.5°	928.5	926.2	939.4	943.3	940.2
150°	953.3	947.9	960.4	965.0	961.1
152.5°	974.2	968.0	979.6	984.3	978.9
155°	994.3	987.5	996.7	1001.3	995.1
157.5°	1010.6	1004.4	1011.5	1016.8	1010.6
160°	1024.5	1019.9	1024.5	1029.1	1023.7
162.5°	1036.9	1032.3	1036.2	1041.6	1034.6
165°	1047.7	1043.1	1045.4	1050.8	1045.4
167.5°	1056.3	1051.5	1054.0	1059.4	1052.4
170°	1063.3	1058.6	1060.1	1065.6	1058.6
172.5°	1067.9	1063.3	1064.8	1070.2	1063.3
175°	1071.7	1066.3	1067.9	1073.2	1065.6
177.5°	1073.2	1067.9	1068.7	1074.1	1067.1
180°	1069.4	1069.4	1069.4	1069.4	1069.4

TEST NUMBER: P915383

CATALOG NUMBER: DFN2DIP-TR3F0-070D040US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.63	12.55	12.51	13.44	14.56	7.61	8.53	8.48	9.42	10.54
	3H	13.31	14.13	14.19	15.03	16.18	8.80	9.62	9.68	10.52	11.67
	4H	13.91	14.69	14.81	15.59	16.75	9.25	10.03	10.15	10.93	12.09
	6H	14.33	15.05	15.24	15.96	17.13	9.57	10.29	10.48	11.20	12.37
	8H	14.46	15.14	15.38	16.06	17.24	9.66	10.34	10.58	11.27	12.44
	12H	14.52	15.16	15.44	16.09	17.28	9.70	10.35	10.63	11.27	12.47
4H	2H	11.66	12.44	12.57	13.34	14.50	8.21	8.99	9.12	9.89	11.05
	3H	13.49	14.13	14.40	15.07	16.24	9.56	10.21	10.48	11.14	12.32
	4H	14.18	14.76	15.10	15.69	16.89	10.11	10.70	11.04	11.63	12.83
	6H	14.69	15.19	15.63	16.15	17.35	10.53	11.03	11.47	11.99	13.19
	8H	14.86	15.33	15.80	16.28	17.49	10.65	11.13	11.60	12.07	13.29
	12H	14.95	15.38	15.91	16.34	17.56	10.72	11.14	11.68	12.11	13.33
8H	4H	14.15	14.62	15.09	15.57	16.78	10.39	10.86	11.33	11.81	13.02
	6H	14.71	15.10	15.68	16.09	17.30	10.90	11.29	11.87	12.28	13.50
	8H	14.92	15.26	15.90	16.24	17.47	11.09	11.43	12.07	12.41	13.64
	12H	15.05	15.36	16.03	16.33	17.61	11.21	11.51	12.19	12.48	13.76
12H	4H	14.10	14.53	15.07	15.50	16.71	10.40	10.82	11.36	11.79	13.01
	6H	14.68	15.03	15.66	16.01	17.24	10.95	11.30	11.93	12.28	13.51
	8H	14.90	15.20	15.88	16.18	17.46	11.16	11.46	12.14	12.44	13.71