

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918070

Luminaire Tested: DFN2DIP-TR3F0-050D070US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918070
REPORT IS A COMBINATION OF REPORTS P900332 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-050D070US930-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8515.8 lumens
Efficiency: N/A
Efficacy: 86.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 98.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918070

CATALOG NUMBER: DFN2DIP-TR3F0-050D070US930-RLLFLL

Luminous Intensity Polar Plot

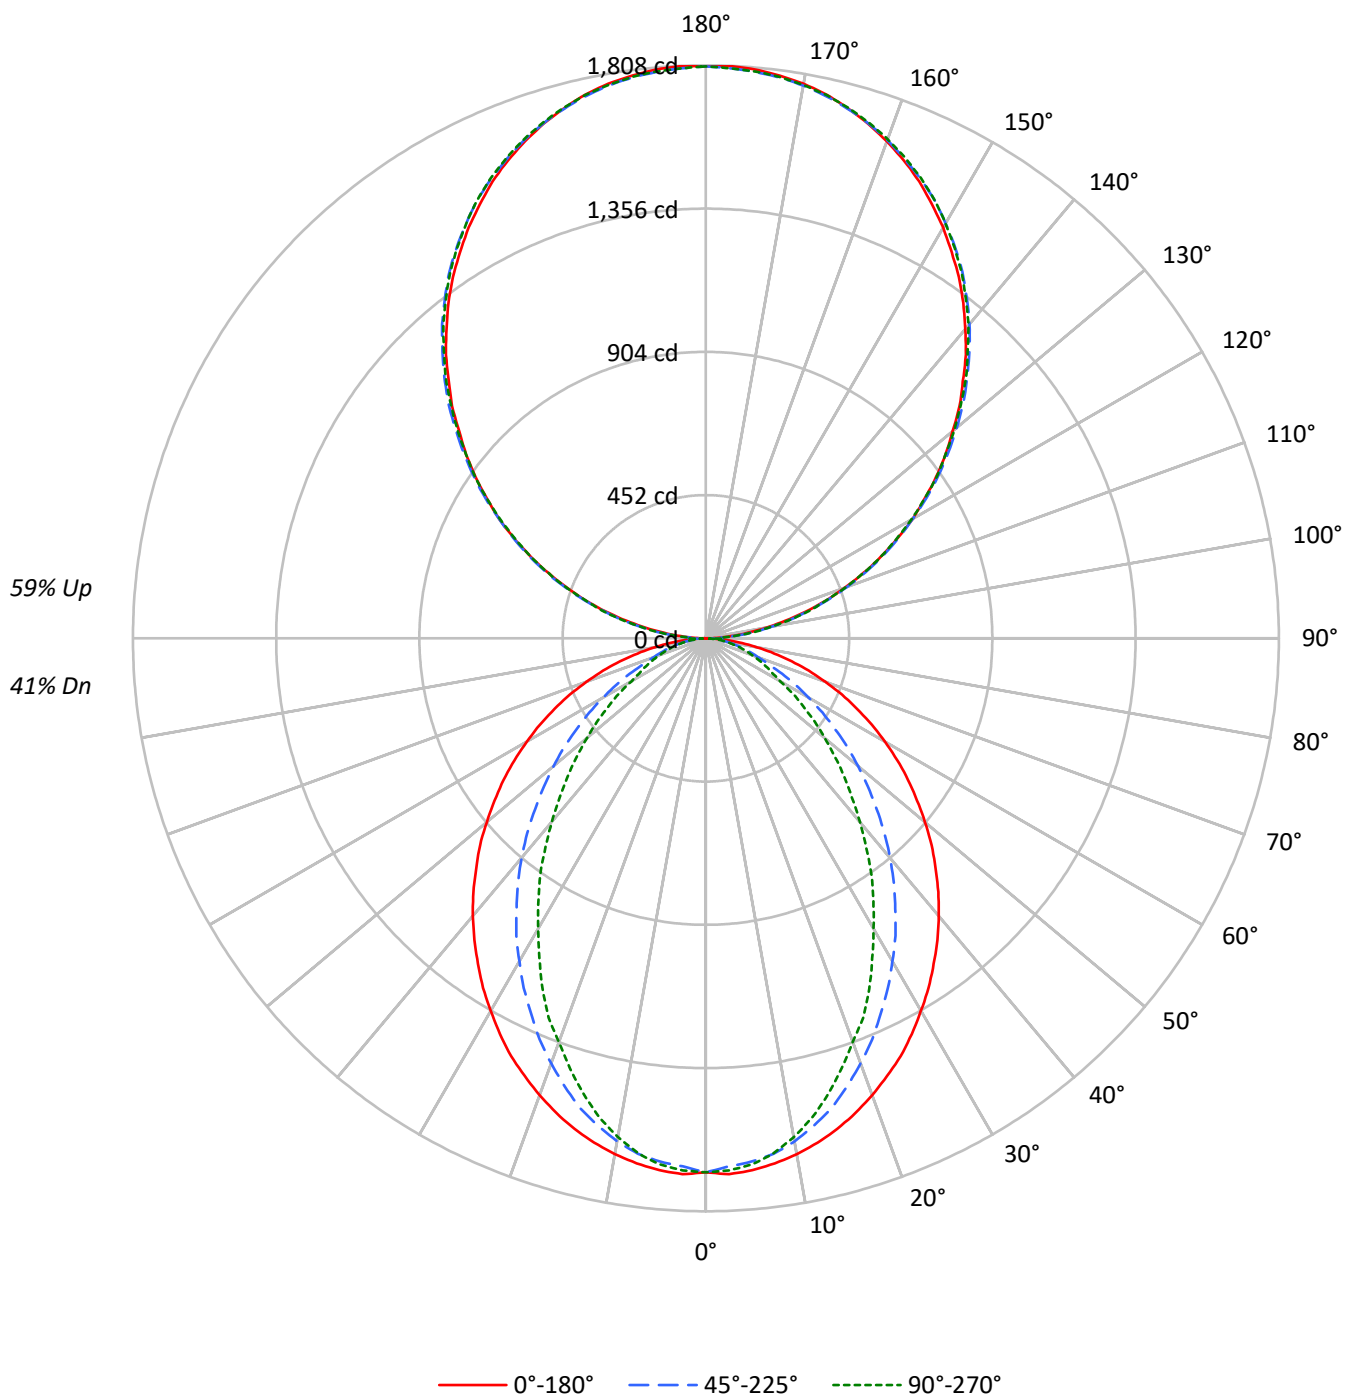

TEST NUMBER: P918070

CATALOG NUMBER: DFN2DIP-TR3F0-050D070US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19
8	54	42	34	29	49	39	32	27	32	27	24	27	23	20	21	19	17
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15
10	47	35	28	23	43	32	26	22	27	23	19	23	19	17	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2099	2099	2099
5°	2102	2064	2078
10°	2080	2022	2009
15°	2050	1954	1903
20°	2011	1860	1774
25°	1971	1755	1649
30°	1918	1648	1491
35°	1865	1533	1352
40°	1812	1413	1194
45°	1750	1282	1050
50°	1686	1149	909
55°	1619	1007	774
60°	1542	859	636
65°	1452	709	571
70°	1344	569	515
75°	1208	498	465
80°	1011	412	399
85°	688	266	291

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1762 cd/sqm

TEST NUMBER: P918070

CATALOG NUMBER: DFN2DIP-TR3F0-050D070US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	1.9
10°-20°	433.5	5.1
20°-30°	608.6	7.1
30°-40°	663.4	7.8
40°-50°	609.7	7.2
50°-60°	478.8	5.6
60°-70°	311.7	3.7
70°-80°	160.4	1.9
80°-90°	46.1	0.5
90°-100°	111.7	1.3
100°-110°	354.9	4.2
110°-120°	607.3	7.1
120°-130°	798.7	9.4
130°-140°	896.5	10.5
140°-150°	879.1	10.3
150°-160°	737.5	8.7
160°-170°	489.1	5.7
170°-180°	170.9	2.0
0°-30°	1200.0	14.1
0°-40°	1863.4	21.9
0°-60°	2951.9	34.7
0°-90°	3470.1	40.7
90°-120°	1073.9	12.6
90°-150°	3648.2	42.8
90°-180°	5046.0	59.3
0°-180°	8515.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1685	1677	1657	1671	1667	160
15°	1602	1586	1534	1505	1490	452
25°	1455	1406	1305	1243	1220	669
35°	1253	1176	1042	945	912	784
45°	1025	922	762	654	617	791
55°	779	660	496	404	375	696
65°	526	402	265	214	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	75
90°	2	20	53	50	52	8
95°	79	95	97	97	95	88
105°	328	332	335	338	338	346
115°	609	618	616	614	609	603
125°	886	900	896	891	889	792
135°	1147	1163	1167	1165	1161	886
145°	1392	1403	1412	1413	1407	870
155°	1592	1596	1601	1608	1604	733
165°	1731	1730	1730	1741	1733	488
175°	1802	1797	1794	1805	1796	171
180°	1805	1805	1805	1805	1805	

TEST NUMBER: P918070

CATALOG NUMBER: DFN2DIP-TR3F0-050D070US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.8	1684.8	1684.8	1684.8	1684.8
2.5°	1692.4	1684.8	1668.0	1683.3	1680.2
5°	1684.8	1677.2	1657.3	1671.0	1666.6
7.5°	1671.0	1662.0	1640.6	1646.7	1639.0
10°	1652.8	1642.1	1611.7	1607.0	1597.9
12.5°	1629.9	1616.2	1575.0	1565.9	1549.1
15°	1602.5	1585.7	1533.9	1505.0	1489.7
17.5°	1570.4	1546.1	1482.0	1448.5	1424.0
20°	1533.9	1503.3	1427.1	1389.1	1355.4
22.5°	1494.3	1459.1	1370.7	1318.9	1296.1
25°	1454.6	1405.7	1305.1	1242.7	1219.7
27.5°	1407.4	1355.4	1244.1	1172.5	1137.4
30°	1357.1	1299.0	1177.0	1099.3	1058.1
32.5°	1308.2	1238.0	1113.1	1021.6	983.4
35°	1253.4	1175.6	1041.5	945.3	911.7
37.5°	1200.0	1116.1	974.4	869.0	831.0
40°	1143.5	1052.1	904.1	795.9	756.3
42.5°	1085.7	988.1	834.1	721.1	683.1
45°	1024.7	922.4	762.4	654.0	617.4
47.5°	966.7	858.5	693.8	585.5	552.0
50°	902.7	794.4	626.7	521.4	489.5
52.5°	840.1	725.7	562.6	462.0	433.1
55°	779.1	660.1	495.5	404.1	375.1
57.5°	716.6	594.7	436.1	350.7	326.3
60°	652.6	530.6	373.5	295.9	271.4
62.5°	590.1	468.1	320.2	247.0	234.9
65°	526.0	402.5	265.3	213.5	208.9
67.5°	465.0	341.5	213.5	187.5	183.0
70°	401.0	282.1	176.8	161.6	155.5
72.5°	340.1	227.1	147.9	135.7	132.6
75°	280.5	173.7	122.0	111.3	109.8
77.5°	221.1	123.4	96.1	89.9	86.8
80°	166.2	88.5	73.1	67.1	67.1
82.5°	115.9	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.5	12.1	12.1	10.7	10.7
90°	1.6	19.6	53.3	50.1	51.7
92.5°	33.8	45.7	47.4	49.0	49.0
95°	79.4	94.7	97.4	97.4	94.7
97.5°	132.2	146.3	152.4	152.4	152.4
100°	193.1	205.7	210.0	210.0	208.4
102.5°	257.4	266.6	272.6	274.3	272.6
105°	327.6	331.9	335.2	337.9	337.9
107.5°	397.2	403.7	403.7	404.9	397.2
110°	464.7	473.4	473.4	473.4	469.0

TEST NUMBER: P918070

CATALOG NUMBER: DFN2DIP-TR3F0-050D070US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	537.6	546.9	545.3	540.9	537.6
115°	609.4	618.2	615.5	613.8	609.4
117.5°	680.7	692.7	685.1	680.7	676.4
120°	752.5	764.5	752.5	752.5	747.6
122.5°	817.8	833.1	825.5	821.1	817.8
125°	886.4	900.0	895.7	890.8	889.2
127.5°	953.3	970.2	964.3	957.7	953.3
130°	1015.9	1035.5	1032.8	1029.6	1023.5
132.5°	1086.1	1101.4	1102.4	1094.9	1090.5
135°	1146.6	1163.3	1166.7	1165.0	1160.7
137.5°	1214.0	1227.6	1230.3	1229.2	1222.7
140°	1273.3	1286.9	1294.5	1294.5	1288.6
142.5°	1334.2	1347.9	1352.2	1353.8	1347.9
145°	1392.0	1402.8	1411.5	1413.2	1407.2
147.5°	1443.6	1457.3	1463.8	1466.5	1460.5
150°	1497.0	1506.2	1512.2	1517.1	1512.2
152.5°	1544.3	1553.6	1561.1	1567.2	1561.1
155°	1591.6	1595.9	1600.9	1608.5	1603.6
157.5°	1632.5	1635.7	1638.4	1649.3	1641.7
160°	1668.9	1672.2	1673.8	1683.0	1676.5
162.5°	1702.7	1702.7	1704.3	1714.6	1707.0
165°	1731.4	1729.8	1729.8	1740.7	1733.1
167.5°	1757.6	1752.7	1752.7	1763.6	1756.0
170°	1777.2	1772.9	1771.2	1782.1	1772.9
172.5°	1790.8	1786.4	1784.8	1795.7	1786.4
175°	1801.6	1797.3	1794.1	1804.9	1795.7
177.5°	1807.7	1803.3	1800.0	1809.3	1800.0
180°	1804.9	1804.9	1804.9	1804.9	1804.9

TEST NUMBER: P918070

CATALOG NUMBER: DFN2DIP-TR3F0-050D070US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.74	9.50	9.78	10.54	11.94	4.72	5.48	5.76	6.52	7.92
	3H	10.40	11.08	11.45	12.13	13.55	5.90	6.57	6.94	7.62	9.04
	4H	11.00	11.65	12.06	12.70	14.12	6.34	6.98	7.40	8.03	9.46
	6H	11.41	12.00	12.48	13.06	14.50	6.65	7.24	7.72	8.30	9.74
	8H	11.53	12.10	12.61	13.17	14.60	6.74	7.30	7.81	8.37	9.80
	12H	11.59	12.12	12.67	13.19	14.64	6.77	7.31	7.85	8.37	9.83
4H	2H	8.75	9.39	9.82	10.44	11.87	5.30	5.94	6.37	6.99	8.42
	3H	10.56	11.10	11.64	12.18	13.61	6.64	7.17	7.71	8.25	9.69
	4H	11.24	11.73	12.32	12.80	14.26	7.18	7.67	8.26	8.74	10.20
	6H	11.75	12.17	12.83	13.26	14.71	7.59	8.01	8.67	9.10	10.55
	8H	11.91	12.31	13.00	13.39	14.86	7.71	8.10	8.80	9.19	10.66
	12H	12.00	12.36	13.11	13.45	14.93	7.77	8.12	8.87	9.22	10.70
8H	4H	11.20	11.60	12.29	12.68	14.15	7.45	7.84	8.53	8.92	10.39
	6H	11.76	12.08	12.87	13.21	14.68	7.95	8.28	9.06	9.40	10.87
	8H	11.97	12.25	13.09	13.36	14.85	8.14	8.42	9.26	9.53	11.02
	12H	12.10	12.35	13.22	13.45	14.98	8.25	8.50	9.37	9.60	11.13
12H	4H	11.15	11.51	12.26	12.61	14.08	7.45	7.80	8.55	8.90	10.37
	6H	11.73	12.02	12.85	13.13	14.61	8.00	8.28	9.12	9.39	10.88
	8H	11.94	12.19	13.06	13.30	14.82	8.20	8.45	9.32	9.56	11.08