

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918128

Luminaire Tested: DFN2DIP-TR3F0-070D090US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918128
REPORT IS A COMBINATION OF REPORTS P900363 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D090US930-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12143.8 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 141.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918128

CATALOG NUMBER: DFN2DIP-TR3F0-070D090US930-FLLFLL

Luminous Intensity Polar Plot

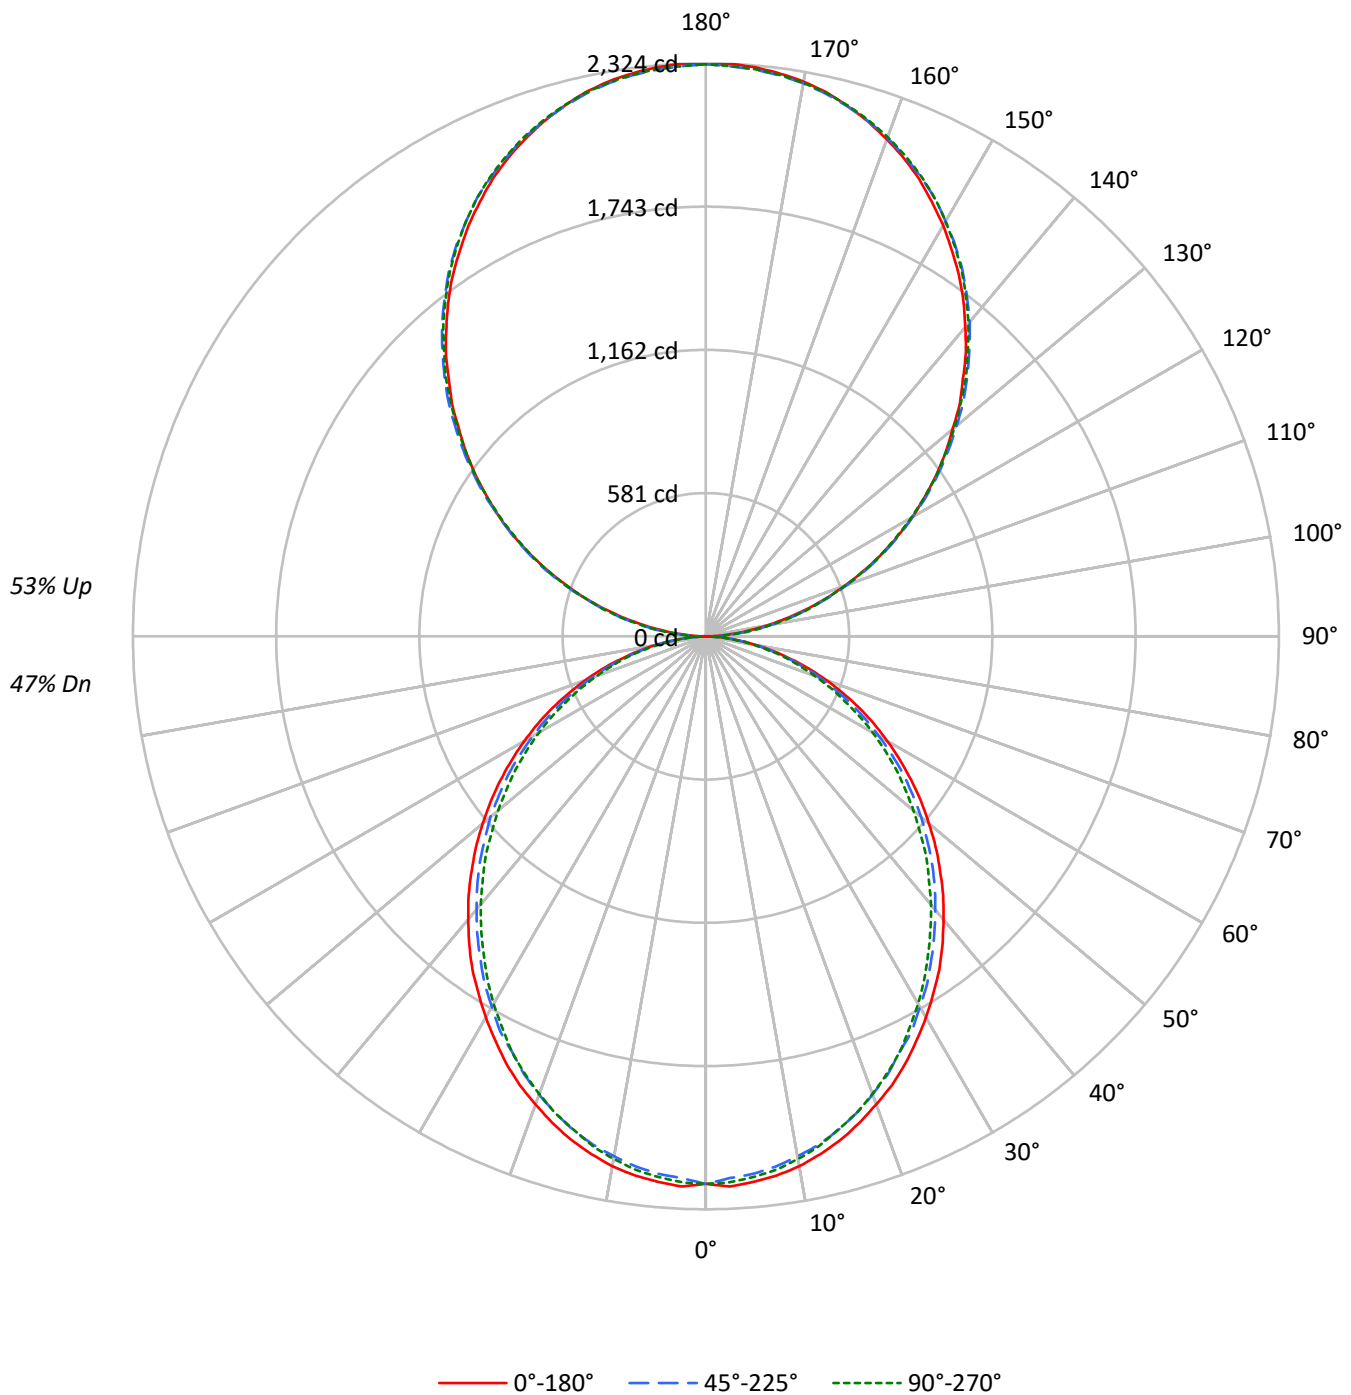

TEST NUMBER: P918128

CATALOG NUMBER: DFN2DIP-TR3F0-070D090US930-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53
1	97	93	89	85	89	85	82	79	71	69	67	59	57	55	47	46	45
2	88	81	75	70	81	75	69	65	63	59	55	51	49	46	41	39	38
3	81	71	64	58	74	66	59	54	55	50	47	45	42	39	37	34	32
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	47	39	34	39	34	30	33	29	25	27	24	21
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	24	21	19
8	53	41	33	28	49	38	31	27	33	27	23	27	23	20	22	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2767	2767	2767
5°	2770	2726	2745
10°	2746	2687	2706
15°	2704	2641	2646
20°	2648	2577	2585
25°	2592	2501	2514
30°	2523	2430	2425
35°	2457	2347	2331
40°	2375	2263	2241
45°	2294	2179	2149
50°	2206	2090	2043
55°	2113	1988	1945
60°	2008	1866	1832
65°	1893	1740	1699
70°	1747	1587	1556
75°	1544	1402	1420
80°	1299	1167	1167
85°	919	769	754

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2294 cd/sqm

TEST NUMBER: P918128

CATALOG NUMBER: DFN2DIP-TR3F0-070D090US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.0	1.7
10°-20°	588.1	4.8
20°-30°	864.2	7.1
30°-40°	1003.7	8.3
40°-50°	1002.5	8.3
50°-60°	874.2	7.2
60°-70°	646.2	5.3
70°-80°	365.6	3.0
80°-90°	103.1	0.8
90°-100°	143.6	1.2
100°-110°	456.3	3.8
110°-120°	780.8	6.4
120°-130°	1026.9	8.5
130°-140°	1152.6	9.5
140°-150°	1130.3	9.3
150°-160°	948.2	7.8
160°-170°	628.8	5.2
170°-180°	219.8	1.8
0°-30°	1661.3	13.7
0°-40°	2665.1	21.9
0°-60°	4541.7	37.4
0°-90°	5656.6	46.6
90°-120°	1380.7	11.4
90°-150°	4690.5	38.6
90°-180°	6487.0	53.4
0°-180°	12143.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2221	2221	2221	2221	2221	
5°	2221	2212	2189	2206	2202	211
15°	2114	2101	2073	2082	2071	595
25°	1913	1896	1860	1864	1860	880
35°	1651	1629	1595	1582	1572	1031
45°	1343	1328	1296	1273	1264	1037
55°	1016	1004	978	952	942	909
65°	686	673	651	632	621	678
75°	359	355	344	331	335	383
85°	88	85	83	77	75	98
90°	2	25	69	64	66	12
95°	102	122	125	125	122	114
105°	421	427	431	434	434	444
115°	784	795	791	789	784	775
125°	1140	1157	1152	1145	1143	1018
135°	1474	1496	1500	1498	1492	1139
145°	1790	1804	1815	1817	1809	1118
155°	2046	2052	2058	2068	2062	942
165°	2226	2224	2224	2238	2228	628
175°	2316	2311	2307	2321	2309	220
180°	2321	2321	2321	2321	2321	

TEST NUMBER: P918128

CATALOG NUMBER: DFN2DIP-TR3F0-070D090US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2220.6	2220.6	2220.6	2220.6	2220.6
2.5°	2233.6	2222.9	2199.3	2220.6	2216.6
5°	2220.6	2212.3	2188.7	2205.7	2201.6
7.5°	2205.7	2193.0	2169.4	2186.7	2182.4
10°	2182.4	2167.4	2141.8	2158.8	2152.5
12.5°	2150.2	2137.5	2111.9	2122.5	2118.2
15°	2114.0	2101.3	2073.4	2082.0	2071.3
17.5°	2069.1	2056.4	2028.5	2039.2	2028.5
20°	2019.9	2007.3	1977.3	1983.7	1975.3
22.5°	1971.0	1951.7	1923.9	1923.9	1919.5
25°	1913.3	1896.2	1860.0	1864.1	1860.0
27.5°	1849.1	1834.2	1806.5	1800.2	1789.5
30°	1785.3	1768.0	1736.1	1729.7	1721.1
32.5°	1716.8	1704.1	1669.9	1657.0	1648.4
35°	1650.7	1629.4	1595.1	1582.2	1571.6
37.5°	1575.9	1556.6	1522.4	1507.5	1496.8
40°	1499.1	1481.9	1447.6	1428.6	1420.0
42.5°	1424.3	1407.1	1373.1	1351.6	1338.9
45°	1343.2	1328.3	1296.1	1272.8	1264.1
47.5°	1264.1	1249.2	1215.0	1191.4	1178.8
50°	1180.8	1170.1	1140.2	1110.4	1099.7
52.5°	1099.7	1084.8	1057.1	1033.6	1018.6
55°	1016.5	1003.6	978.0	952.4	941.8
57.5°	933.2	922.5	894.6	869.0	860.5
60°	849.8	841.4	811.5	788.0	781.6
62.5°	768.7	753.7	732.5	711.2	702.5
65°	685.6	672.6	651.3	632.1	621.4
67.5°	600.1	589.3	570.2	555.3	546.7
70°	521.1	512.5	493.2	478.3	469.9
72.5°	439.9	431.4	420.7	405.8	399.4
75°	358.6	354.6	343.6	331.0	335.3
77.5°	286.2	277.5	273.2	266.8	260.6
80°	213.6	211.4	207.1	200.7	196.4
82.5°	145.2	145.2	143.2	134.6	134.6
85°	87.5	85.4	83.4	76.8	74.8
87.5°	38.5	34.2	29.9	23.6	21.3
90°	2.1	25.2	68.6	64.3	66.4
92.5°	43.4	58.8	60.9	62.9	62.9
95°	102.2	121.7	125.2	125.2	121.7
97.5°	170.0	188.2	195.9	195.9	195.9
100°	248.3	264.5	270.0	270.0	268.0
102.5°	330.9	342.8	350.5	352.6	350.5
105°	421.2	426.7	431.0	434.5	434.5
107.5°	510.7	519.1	519.1	520.5	510.7
110°	597.5	608.7	608.7	608.7	603.1

TEST NUMBER: P918128

CATALOG NUMBER: DFN2DIP-TR3F0-070D090US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	691.2	703.1	701.0	695.4	691.2
115°	783.6	794.8	791.2	789.2	783.6
117.5°	875.2	890.6	880.8	875.2	869.6
120°	967.6	982.9	967.6	967.6	961.2
122.5°	1051.5	1071.1	1061.4	1055.7	1051.5
125°	1139.7	1157.2	1151.6	1145.2	1143.2
127.5°	1225.7	1247.4	1239.7	1231.3	1225.7
130°	1306.2	1331.4	1327.9	1323.6	1316.0
132.5°	1396.4	1416.0	1417.4	1407.6	1402.1
135°	1474.1	1495.7	1500.0	1497.9	1492.3
137.5°	1560.8	1578.3	1581.8	1580.5	1572.1
140°	1637.1	1654.6	1664.3	1664.3	1656.7
142.5°	1715.5	1732.9	1738.5	1740.7	1732.9
145°	1789.7	1803.6	1814.8	1816.9	1809.2
147.5°	1856.1	1873.6	1882.0	1885.5	1877.8
150°	1924.7	1936.6	1944.2	1950.5	1944.2
152.5°	1985.5	1997.4	2007.2	2014.9	2007.2
155°	2046.4	2051.9	2058.3	2068.1	2061.8
157.5°	2098.8	2103.1	2106.6	2120.5	2110.7
160°	2145.7	2149.9	2152.1	2163.9	2155.5
162.5°	2189.1	2189.1	2191.2	2204.5	2194.7
165°	2226.2	2224.1	2224.1	2238.1	2228.3
167.5°	2259.8	2253.5	2253.5	2267.4	2257.6
170°	2285.0	2279.3	2277.3	2291.2	2279.3
172.5°	2302.4	2296.9	2294.7	2308.8	2296.9
175°	2316.4	2310.8	2306.6	2320.7	2308.8
177.5°	2324.1	2318.5	2314.3	2326.2	2314.3
180°	2320.7	2320.7	2320.7	2320.7	2320.7

TEST NUMBER: P918128

CATALOG NUMBER: DFN2DIP-TR3F0-070D090US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.43	11.26	11.42	12.26	13.58	10.00	10.83	10.99	11.83	13.15
	3H	12.08	12.82	13.08	13.83	15.17	11.61	12.36	12.61	13.36	14.70
	4H	12.66	13.36	13.67	14.38	15.72	12.19	12.90	13.20	13.91	15.26
	6H	13.05	13.70	14.07	14.72	16.08	12.58	13.23	13.60	14.25	15.61
	8H	13.15	13.77	14.18	14.80	16.16	12.68	13.30	13.71	14.33	15.69
	12H	13.19	13.78	14.22	14.81	16.19	12.72	13.31	13.75	14.33	15.72
4H	2H	10.88	11.59	11.90	12.60	13.95	10.54	11.25	11.56	12.26	13.61
	3H	12.74	13.33	13.76	14.37	15.73	12.35	12.94	13.37	13.98	15.34
	4H	13.44	13.98	14.47	15.01	16.40	13.04	13.58	14.07	14.61	16.00
	6H	13.95	14.41	14.99	15.47	16.85	13.54	14.01	14.59	15.06	16.44
	8H	14.09	14.53	15.13	15.57	16.97	13.69	14.12	14.73	15.17	16.56
	12H	14.16	14.55	15.22	15.61	17.01	13.74	14.14	14.81	15.20	16.60
8H	4H	13.63	14.07	14.68	15.11	16.51	13.28	13.71	14.32	14.76	16.15
	6H	14.25	14.61	15.32	15.70	17.09	13.89	14.25	14.96	15.34	16.73
	8H	14.47	14.78	15.54	15.85	17.27	14.10	14.42	15.18	15.49	16.90
	12H	14.59	14.87	15.67	15.94	17.39	14.21	14.49	15.29	15.56	17.01
12H	4H	13.62	14.01	14.68	15.07	16.47	13.27	13.66	14.33	14.72	16.12
	6H	14.28	14.60	15.35	15.67	17.08	13.93	14.25	15.01	15.32	16.73
	8H	14.51	14.79	15.59	15.86	17.31	14.16	14.44	15.24	15.51	16.96

END OF REPORT