

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918152

Luminaire Tested: DFN2DIP-TR3F0-080D080US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918152
REPORT IS A COMBINATION OF REPORTS P900352 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-080D080US930-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11316.4 lumens
Efficiency: N/A
Efficacy: 79.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 142
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918152

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US930-RLLFLL

Luminous Intensity Polar Plot

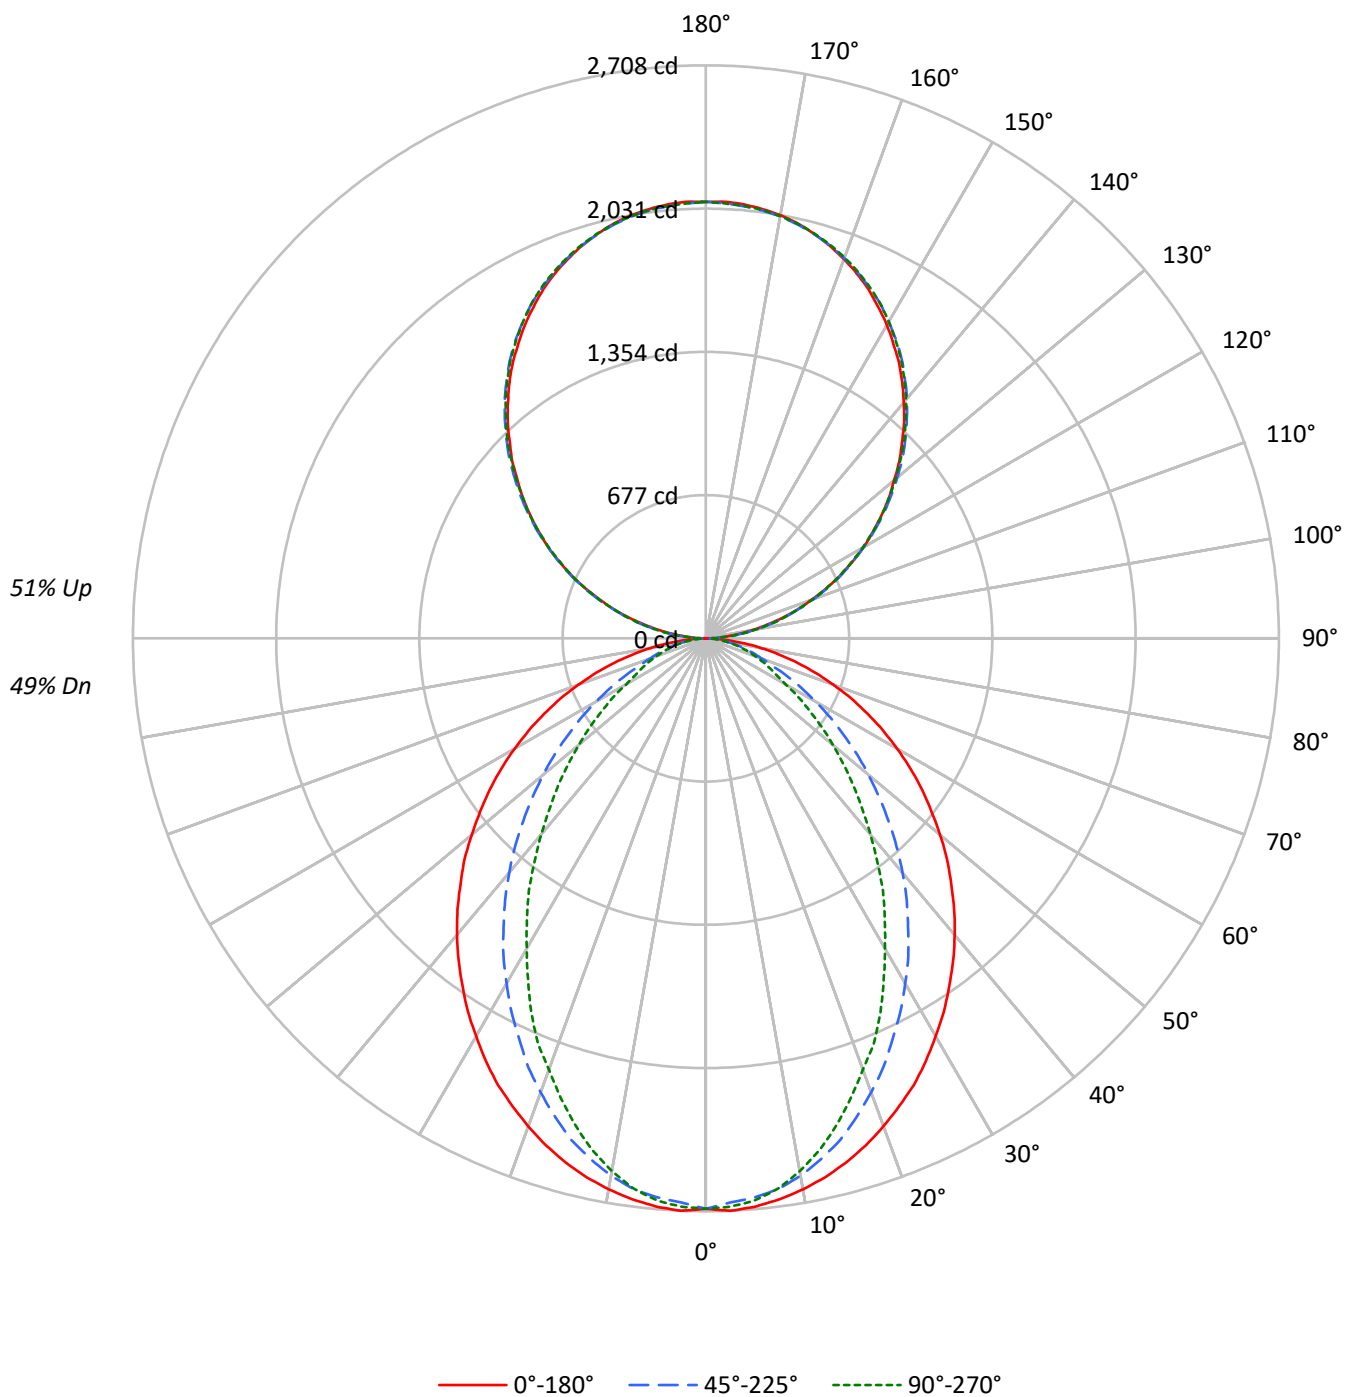

TEST NUMBER: P918152

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3359	3359	3359
5°	3363	3303	3325
10°	3327	3235	3214
15°	3280	3126	3045
20°	3217	2976	2838
25°	3153	2808	2638
30°	3068	2636	2386
35°	2984	2452	2164
40°	2899	2262	1910
45°	2800	2051	1680
50°	2698	1838	1455
55°	2591	1611	1239
60°	2467	1374	1018
65°	2324	1134	913
70°	2151	910	823
75°	1932	796	745
80°	1617	659	638
85°	1100	427	467

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2800 cd/sqm

TEST NUMBER: P918152

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.6	2.2
10°-20°	693.6	6.1
20°-30°	973.7	8.6
30°-40°	1061.4	9.4
40°-50°	975.6	8.6
50°-60°	766.2	6.8
60°-70°	498.7	4.4
70°-80°	256.7	2.3
80°-90°	71.4	0.6
90°-100°	127.6	1.1
100°-110°	405.6	3.6
110°-120°	694.1	6.1
120°-130°	912.8	8.1
130°-140°	1024.6	9.1
140°-150°	1004.7	8.9
150°-160°	842.8	7.4
160°-170°	558.9	4.9
170°-180°	195.4	1.7
0°-30°	1919.9	17.0
0°-40°	2981.4	26.3
0°-60°	4723.1	41.7
0°-90°	5549.9	49.0
90°-120°	1227.3	10.8
90°-150°	4169.4	36.8
90°-180°	5766.0	51.0
0°-180°	11316.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2696	2696	2696	2696	2696	
5°	2696	2684	2652	2674	2666	256
15°	2564	2537	2454	2408	2384	722
25°	2327	2249	2088	1988	1952	1070
35°	2005	1881	1666	1513	1459	1255
45°	1639	1476	1220	1046	988	1266
55°	1246	1056	793	646	600	1114
65°	842	644	424	342	334	834
75°	449	278	195	178	176	475
85°	105	54	46	46	46	120
90°	2	22	61	57	59	11
95°	91	108	111	111	108	101
105°	374	379	383	386	386	395
115°	696	706	703	702	696	689
125°	1013	1029	1024	1018	1016	905
135°	1310	1330	1333	1332	1326	1013
145°	1591	1603	1613	1615	1608	994
155°	1819	1824	1830	1838	1833	837
165°	1979	1977	1977	1989	1981	558
175°	2059	2054	2050	2063	2052	196
180°	2063	2063	2063	2063	2063	



TEST NUMBER: P918152

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2695.7	2695.7	2695.7	2695.7	2695.7
2.5°	2707.9	2695.7	2668.8	2693.3	2688.4
5°	2695.7	2683.6	2651.7	2673.7	2666.4
7.5°	2673.7	2659.2	2625.0	2634.6	2622.4
10°	2644.4	2627.4	2578.7	2571.2	2556.7
12.5°	2608.0	2586.0	2519.9	2505.4	2478.5
15°	2563.9	2537.0	2454.2	2407.9	2383.5
17.5°	2512.7	2473.6	2371.1	2317.6	2278.4
20°	2454.2	2405.3	2283.4	2222.6	2168.7
22.5°	2390.8	2334.6	2193.1	2110.2	2073.7
25°	2327.4	2249.2	2088.2	1988.3	1951.6
27.5°	2251.8	2168.7	1990.6	1876.0	1819.8
30°	2171.3	2078.4	1883.3	1759.0	1693.0
32.5°	2093.1	1980.8	1781.0	1634.5	1573.4
35°	2005.4	1880.9	1666.3	1512.6	1458.7
37.5°	1919.9	1785.7	1558.9	1390.4	1329.6
40°	1829.7	1683.4	1446.6	1273.4	1210.0
42.5°	1737.0	1580.9	1334.5	1153.9	1093.0
45°	1639.4	1475.9	1219.8	1046.4	988.0
47.5°	1546.8	1373.6	1110.1	936.7	883.1
50°	1444.2	1271.1	1002.7	834.2	783.2
52.5°	1344.1	1161.1	900.2	739.2	692.9
55°	1246.5	1056.3	792.8	646.5	600.2
57.5°	1146.6	951.5	697.8	561.2	522.0
60°	1044.1	849.0	597.6	473.4	434.3
62.5°	944.2	749.0	512.3	395.3	375.9
65°	841.7	643.9	424.4	341.7	334.1
67.5°	744.1	546.4	341.7	299.9	292.8
70°	641.6	451.4	282.9	258.5	248.7
72.5°	544.0	363.4	236.6	217.2	212.2
75°	448.8	278.0	195.2	178.1	175.8
77.5°	353.8	197.5	153.8	143.9	139.0
80°	265.8	141.6	117.0	107.4	107.4
82.5°	185.3	95.2	80.5	75.6	75.6
85°	104.8	53.6	46.3	46.3	46.3
87.5°	39.1	19.4	19.4	17.1	17.1
90°	1.9	22.4	61.0	57.2	59.1
92.5°	38.6	52.3	54.1	55.9	55.9
95°	90.8	108.2	111.3	111.3	108.2
97.5°	151.2	167.3	174.1	174.1	174.1
100°	220.8	235.1	240.0	240.0	238.1
102.5°	294.2	304.8	311.5	313.4	311.5
105°	374.4	379.4	383.1	386.2	386.2
107.5°	454.0	461.5	461.5	462.7	454.0
110°	531.1	541.0	541.0	541.0	536.1

TEST NUMBER: P918152

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	614.4	625.0	623.1	618.2	614.4
115°	696.5	706.5	703.4	701.5	696.5
117.5°	778.0	791.7	782.9	778.0	773.0
120°	860.1	873.8	860.1	860.1	854.4
122.5°	934.7	952.1	943.4	938.4	934.7
125°	1013.0	1028.6	1023.6	1018.0	1016.2
127.5°	1089.6	1108.8	1102.0	1094.5	1089.6
130°	1161.1	1183.4	1180.3	1176.6	1169.8
132.5°	1241.3	1258.7	1260.0	1251.2	1246.3
135°	1310.3	1329.6	1333.3	1331.5	1326.5
137.5°	1387.4	1403.0	1406.1	1404.8	1397.3
140°	1455.2	1470.7	1479.4	1479.4	1472.6
142.5°	1524.9	1540.4	1545.4	1547.3	1540.4
145°	1590.8	1603.2	1613.1	1615.0	1608.2
147.5°	1649.8	1665.4	1672.8	1676.0	1669.2
150°	1710.8	1721.3	1728.2	1733.8	1728.2
152.5°	1764.9	1775.5	1784.2	1791.0	1784.2
155°	1819.0	1824.0	1829.6	1838.3	1832.7
157.5°	1865.6	1869.4	1872.5	1884.9	1876.2
160°	1907.3	1911.1	1912.9	1923.5	1916.0
162.5°	1945.9	1945.9	1947.7	1959.6	1950.8
165°	1978.8	1976.9	1976.9	1989.4	1980.7
167.5°	2008.7	2003.1	2003.1	2015.5	2006.8
170°	2031.1	2026.1	2024.2	2036.7	2026.1
172.5°	2046.6	2041.7	2039.8	2052.2	2041.7
175°	2059.0	2054.1	2050.3	2062.8	2052.2
177.5°	2065.9	2060.9	2057.2	2067.8	2057.2
180°	2062.8	2062.8	2062.8	2062.8	2062.8

TEST NUMBER: P918152

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.21	12.04	12.19	13.02	14.30	7.19	8.01	8.16	8.99	10.28
	3H	12.88	13.62	13.86	14.61	15.92	8.37	9.11	9.36	10.10	11.41
	4H	13.48	14.18	14.48	15.17	16.49	8.82	9.51	9.82	10.51	11.83
	6H	13.90	14.54	14.90	15.54	16.87	9.13	9.77	10.14	10.77	12.10
	8H	14.02	14.63	15.03	15.64	16.97	9.22	9.83	10.24	10.85	12.17
	12H	14.08	14.65	15.09	15.66	17.01	9.26	9.84	10.28	10.85	12.20
4H	2H	11.23	11.92	12.23	12.92	14.24	7.78	8.47	8.78	9.47	10.79
	3H	13.05	13.63	14.06	14.65	15.98	9.12	9.70	10.13	10.72	12.05
	4H	13.73	14.26	14.75	15.28	16.63	9.66	10.19	10.68	11.21	12.56
	6H	14.24	14.69	15.27	15.73	17.08	10.08	10.53	11.11	11.57	12.92
	8H	14.41	14.83	15.44	15.86	17.23	10.20	10.63	11.23	11.66	13.02
	12H	14.50	14.88	15.54	15.93	17.30	10.26	10.65	11.31	11.69	13.06
8H	4H	13.70	14.12	14.73	15.15	16.52	9.94	10.36	10.97	11.39	12.76
	6H	14.25	14.60	15.31	15.68	17.04	10.45	10.80	11.50	11.87	13.24
	8H	14.46	14.77	15.53	15.83	17.21	10.64	10.94	11.70	12.00	13.38
	12H	14.59	14.87	15.66	15.92	17.34	10.75	11.02	11.81	12.07	13.50
12H	4H	13.65	14.03	14.70	15.08	16.45	9.94	10.32	10.99	11.37	12.74
	6H	14.23	14.54	15.29	15.59	16.98	10.50	10.80	11.56	11.86	13.25
	8H	14.44	14.71	15.51	15.77	17.19	10.70	10.97	11.77	12.02	13.45